

Innovative Systems 2016



LED Constant-current Systems

LED modules, optics and constant-current drivers

LED Modules for Direct Connections to Mains Voltage

Downlights, DecoLEDs and LEDSpots

Components for Luminaire Protection and Power Adjustment

24 V LED Systems

LED modules, converters and colour control units

Emergency Lighting Devices for LED Applications

LED Lamps

Replacement for low-voltage and high-voltage halogen incandescent lamps

LiCS Indoor

Lighting control systems for indoor applications

LiCS Outdoor

Lighting control systems for outdoor applications

LIGHTING TECHNOLOGY PRODUCTS



Vossloh-Schwabe

Vossloh-Schwabe is not merely a provider of top-quality system solutions for the lighting industry, but above all makes a competent and innovative contribution to setting market trends in the field of LED lighting.

Numerous VS project solutions implemented on the basis of entire LED systems are currently satisfying the high requirements placed on energy-efficient lighting all over the world.

Employing approximately 1000 people in more than 20 countries, Vossloh-Schwabe is represented all over the world. As a subsidiary of the Japanese Panasonic Group, VS can draw on extensive resources for R&D as well as for international expansion activities.

A highly motivated workforce, comprehensive market knowledge, profound industry expertise as well as eco-awareness and environmental responsibility show Vossloh-Schwabe to be a reliable partner for the provision of optimum and cost-effective LED lighting solutions.

But Vossloh-Schwabe naturally also continues to provide all components needed in the field of conventional lighting technology.

Vossloh-Schwabe's dedication to delivering superior quality is reflected in its ISO 9001 certification.

Vossloh-Schwabe is ready to embark on a collaborative journey into an economically illuminated LED future.



Some lighting applications continue to rely on conventional technologies.

Please see our separate Standard Technology Catalogue for product details.



LED System Overview		6-7	
1	LED Constant-current System	8-82	
	LUGA Line RX and LUGA Line	10-13	
	LED Line SMD Kit	14-17	
	LED Line SMD L14/28/56	18-21	
	LED Line SMD Slim	22-24	
	LED Line Fix LUGA 2015	25-29	
	LED Line Fix SMD	30-32	
	LED Line AluFix LUGA 2015 and AluFix LUGA RX	33-40	
	LED Line AluFix SMD	41-45	
	LED Line SMD LightBar	46	
	LED Light Panel SMD	47-48	
	LUGA Shop 2015	49-53	
	LUGA C 2016	54-57	
	LED industry and hall lighting	58-63	
	SYM I	60-61	
	SYM II	62-63	
	LUGA C 2016, Optics	64-66	
	LED street and outdoor lighting	67-74	
	M-Class	69-70	
	S-Class	71-72	
	AreaLED	73-74	
	PowerEmitter	75-76	
	TriplePowerEmitter	76-77	
	PowerOptics	78-80	
	Reflectors for PowerEmitter XP modules	81	
	Heat sinks for LED modules XP and XML	81	
	Thermal tapes	82	
2	LED Modules for Direct Connection to Mains Voltage	83-98	
	ReadyLine COB	84-85	
	LEDSpot ReadyLine IP	86	
	LEDSpot ReadyLine MR16	87	
	ReadyLine S	88-89	
	ReadyLine DL	90-91	
	ReadyLine C	92-98	
3	LED Downlights	99-105	
	Pro and Prime	100-104	
	DecoLED	105	
4	LEDSpots	106-138	
	LEDSpot overview	107	
	Shopline, NEXT, EVO	108-119	
	LEDSpot ActiveLine	120-126	
	LEDSpots	127-138	
5	LED Constant-current Drivers	139-188	
	For office lighting	142-154	
	For retail lighting	155-163	
	For residential lighting	164-172	
	For street lighting	173-182	
	For industrial lighting	183-187	
	iProgrammer	188	
6	Protection and Power Adjustment	189-198	
	Luminaire protection device	190-192	
	Inrush current limiter	193	
	Power switches	194-196	
	Switch units	197	
	Resistor network	198	
7	24 V Systems	199-213	
	LEDLine Flex SMD Professional	200-201	
	AluLED IP64	202-203	
	Colour control modules - DigiLED CA	203-205	
	LED converters for LED modules 24 V and 12 V	206-213	
8	Emergency Lighting Devices for LED Applications	214-216	
9	LED Lamps	217-222	
	Low-voltage replacement	218-220	
	High-voltage replacement	221-222	
10	Technical Details for LED Applications	223-229	
11	Lighting Control System for Indoor Applications	230-259	
	Systems overview	232-234	
	Light Controller IP/DALI, LightBox	235-236	
	Light Controller XSW-E6 and XSW-E64	237-238	
	Light Controller L / LS and LW / LSW	239-240	
	Light Controller S / XS	241-242	
	Extender / Extender Flex	243	
	MultiSensors	244	
	Industry sensors High Bay	245	
	Technical details	246-259	
12	Lighting Control System for Outdoor Applications	260-276	
	Smart Night	264-265	
	Flex Night	266-268	
	Managed Night	269-274	
	Accessories	275-276	
	Table of Reference Numbers	277-290	

LED SYSTEM

LED MODULES, OPTICS,
OPERATING DEVICES AND
CONNECTING TECHNOLOGY



Vossloh-Schwabe is not merely a provider of top-quality system solutions Systems and Components for Lighting Applications with LEDs.

Thanks to the characteristics and advantages of LED modules over conventional light sources, there is almost no limit to the ways in which LED modules can be used, and new applications are being found on a continual basis.

LED modules are used in a variety of applications from architecture and furniture design right through to creating atmospheric lighting in homes, shops, bars and restaurants. LED modules can be integrated into existing lighting systems or integrated into the respective application as a separate light source. These LED modules are dimmable if used with a suitable LED driver and a matching control unit.

Vossloh-Schwabe develops and manufactures LED modules in different performance classes and shapes using COB and SMD technology with a comparably minimal decrease in luminous flux over a module's service life and with extremely high colour stability.

Precise optics from Vossloh-Schwabe enable efficient implementation of application-specific light distributions for shops, offices, industrial plants and street lighting.

Vossloh-Schwabe's high-quality electronic LED control gear, which is available in various performance classes and designs, is designed to supply power to voltage- and constant-current-operated LED applications.

Supermarket, Moscow

VS products: LED Line SMD Kits, LED drivers and optics Retail SYM



Castle Vollrads, Germany



Pjatjorotschka Supermarket, Moscow, Russia

Castle Vollrads, Germany

Surrounded by forest and vineyards, Vollrads Castle lies in the middle of Germany's beautiful Rheingau region in the federal state of Hesse. Apart from the historical castle itself, the vineyard, restaurant and a broad range of events go to make Vollrads Castle an extremely popular sightseeing destination.

The vineyard at Vollrads Castle is one of the world's oldest and documentary proof exists that wine was traded here as early as 1211. Nowadays, the Vollrads winery concentrates solely on the cultivation of Riesling vines over an area of some 80 hectares.

Almost the entire outdoor and façade lighting, including the castle's emblematic and imposing tower, features energy-efficient LED modules and drivers made by Vossloh-Schwabe.

Luminaires and lighting solutions: Arne Fiedler
Photos: Matthias Klenke

Pjatjorotschka Supermarket, Moscow, Russia

Energy efficiency is an important topic in the retail trade and substantial energy savings can be achieved in the area of shop lighting. For that reason, an ever increasing number of retail companies are switching to energy efficient technology. In this vein, the entire lighting system was replaced with energy-saving LED technology in the course of refurbishment work at a shop of the Pjatjorotschka supermarket chain.

One of Russia's largest supermarket chains is now using one of the most efficient lighting systems on the market. And Vossloh-Schwabe components feature in the entire system – from simple lamps right up to the central controller.

The aim of the project was to install an automated and efficient lighting system that guarantees ideal lighting during business hours, protects the shop from burglars at night and increases shop visibility.

ALU-MAXi-SP luminaires in a length of 2.8 m – fitted with VS LEDLine SMD Kit LED modules, corresponding VS LED drivers and VS optics featuring Standard and Retail SYM beam characteristics – now provide general lighting in the retail area, at the tills and in the fresh vegetable area.

LED System Overview by Application Fields



STREET



+ LICS OUTDOOR

LED modules

- M-Class: IP20, IP66, IP67, IP69, Allround, LightEngine
- S-Class: IP20, IP66, IP67, IP69, Allround, LightEngine
- AreaLED: IP20, IP66, IP67, IP69, Allround, LightEngine
- LUGA C

LED drivers

- Capacity range: 40-150 W
- Current supply: 350-1400 mA
- Dimming: DALI, PUSH, 1-10 V, power-reduction
- Variants: PrimeLine and ComfortLine
- Functions: 3C, NTC, MFF

Accessories

Optics (silicone, PMMA), luminaire protection device, power switches, switch units



ARCHITECTURE



+ LICS OUTDOOR

LED modules

- LEDLine Flex SMD Professional Indoor 24 V: White; Standard and High Brightness
- AluLED: IP20, IP64; White and RGB

LED converters

- 24 V: ComfortLine and EasyLine
Capacity range: 20, 50, 70, 75, 100, 130, 150 W
Degree of protection: IP20, IP67
- 12 V: ComfortLine and EasyLine
Capacity range: 6, 12, 50, 70 W
Degree of protection: IP20, IP67

LED colour control

- DigiLED: Manuell, DALI, DMX, IR, RF, Push, Mono, Slave



INDUSTRY



+ LICS INDOOR

LED modules

- SYM I: IP20, IP66, IP67, IP69, Allround, LightEngine
- SYM II: IP20, IP66, IP67, IP69, Allround, LightEngine
- LUGA C

LED drivers

- Capacity range: 19.95-230 W
- Current supply: 350-3200 mA
- Dimming: DALI, PUSH, 1-10 V
- Variants: ComfortLine and EasyLine

Accessories

Optics (silicone, PMMA), Luminaire protection device, inrush current limiter, resistor network



OFFICE



+ LICs INDOOR

LED modules

- LUGA Line, LUGA Line RX and LUGA Line Food: Linear COB modules
- LED Line SMD: Kit, Kit 3R, L14/28/56, Slim
- LED Line Fix: LUGA and SMD
- LED Line AluFix: LUGA, LUGA RX and SMD
- LED Line SMD LightBar
- LED Light Panel SMD

LED drivers

- Capacity range: 9-107 W
- Current supply: 60-700 mA
- Dimming: DALI, PUSH, 1-10 V, power-reduction
- Variants: PrimeLine and ComfortLine
- Functions: 3C, NTC, MFF

Accessories

Optics, luminaire protection device, power switches, switch units



RETAIL



+ LICs INDOOR

LED modules

- LUGA Shop
- LUGA C

LEDSpots and Downlights

- ShopLine, NEXT 111
- EVO75, EVO90
- ActiveLine: LUGA, COB 9.1, COB 7.1, COB 6.1, HALO, Quad
- Downlights Pro and Prime

LED drivers

- Capacity range: 10-60 W
- Current supply: 250-1050 mA
- Dimming: DALI, PUSH, 1-10 V
- Variants: PrimeLine, ComfortLine and EasyLine
- Functions: 3C, NTC, MFF

LED modules

for direct connection to mains


- NEXT 111 R
- EVO75 R, EVO90 R

LED Lamps

- AR111
- GU10

Accessories

Optics, luminaire protection device, inrush current limiter, resistor network

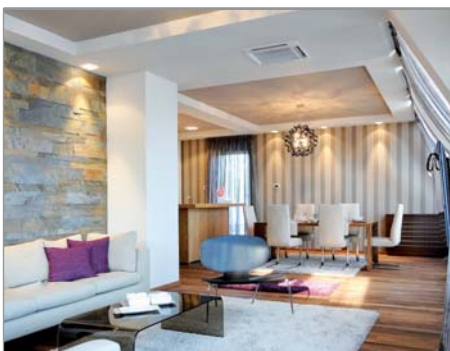

RESIDENTIAL



+ LICs INDOOR

LED modules

- PowerEmitter
- TriplePowerEmitter

LED drivers

- Capacity range: 5.6-36 W
- Current supply: 150-1050 mA
- Dimming: Phase-cut dimmable
- Variants: ComfortLine and EasyLine

LED modules

for direct connection to mains

- LEDSpot ReadyLine IP and MR16
- ReadyLine: S, DL and C

LEDSpots and Downlights

- Single LEDSpots: IPLine, SmartLine, StartLine, FlatLine, DiscLine, EffectLine
- ActiveLine Pro
- DecoLEDs

LED Lamps

- MR16
- GU10

Accessories

Optics, reflectors, heat sinks

CONSTANT CURRENT LED MODULES, DRIVERS AND ACCESSORIES



The LED modules dealt with in this chapter are constant-current-operated built-in modules whose circuit board does not feature its own power-supply electronics. Circular and linear modules featuring various chip types are available.

Ensuring constant-current control of LED modules benefits permanent operation, efficiency (lm/Watt) and the service life of LEDs. Constant-current control is particularly important for high-performance LEDs, as a module brightness of up to 15,000 lm can be achieved.

Various brightness levels can be set by selecting the requested operating current. In this regard, the maximum admissible current must never be exceeded and heat development must be monitored.

Typical applications

- Installation in luminaires for general lighting purposes
- Residential lighting
- Reading lamps and spots
- Entertainment
- Retail lighting
- Architectural lighting
- Street lighting

The specifications contained in this catalogue can change due to technical innovations. Any such changes will be made without separate notification.

Please read the safety and installation instructions on the individual products as well as further technical information provided in the extensive product descriptions at www.vossloh-schwabe.com.



Constant-current LED modules for all applications

Vossloh-Schwabe's constant-current-operated LED modules are characterised by their extreme efficiency, long service life and colour brilliance. The extensive range of different designs and brightness levels results in a multitude of application options.

Whether they are used for indoor or outdoor applications: VS LED modules can be found as a decorative and functional lighting source in offices, homes, buildings and on our streets. They are:

- highly efficient,
- characterised by a high CRI and
- extremely versatile.

Constant-current drivers for current-operated LED modules

To ensure safe operation of LEDs that are connected in series, the operating current must be kept at a constant value by the driver. It is recommended to operate all high-performance LED modules in combination with an external constant-current driver.

To ensure the same current flows through every LED, high-performance LEDs can only be connected in series. For each respective application, the source of the constant-current must be selected to ensure the required current and sufficient voltage are supplied to the LED modules. The number of LED modules that can be connected to control gear is dependent on the forward voltage of the respective modules.

LUGA Line RX 2015

Built-in PCB lighting modules

The new LUGA Line RX 2015 is characterised by its particularly easy-to-use mounting and connection options (ZHAGA-compliant hole spacing). Thanks to producing a homogeneous light field without any discernible individual light points, these LED modules are ideal for use with reflectors in luminaires constructed for T5 and T8 lamps.




Technical notes

Dimensions: 280x18.4 mm and 93x18.4 mm
 On-board push-in terminals (WAGO 2059)
 Allowed operating temperature at t_c point:
 -40 to 85 °C (> 700 mA)
 -40 to 105 °C (\leq 700 mA)


Use of external LED constant-current drivers
 Efficiency up to 148 lm/W
 Colour rendering index R_a : > 80 / > 90
 Colour accuracy initially: 3 SDCM;
 after 50,000 hrs. operating time: 4 SDCM
 Lumen maintenance L80/B10:
 50,000 hrs. (I_F 700 mA)
 Packaging unit: 60 pcs.

Typical applications


- Office lighting
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting



DML028



DML068

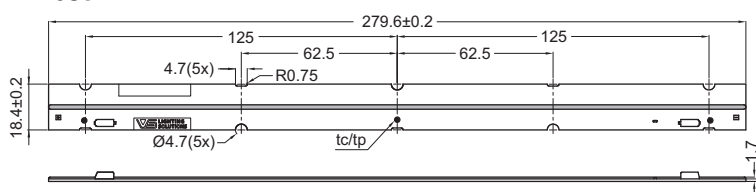

Type	Ref. No.	Colour	Correlated colour temperature* K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})**								Beam angle °	Typ. CRI R_a
				350 mA		500 mA		700 mA		1050 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W		
DML068				$P_{el} = 5.9 \text{ W}$ $U_{typ.} = 16.9 \text{ V}$		$P_{el} = 8.6 \text{ W}$ $U_{typ.} = 17.2 \text{ V}$		$P_{el} = 12.3 \text{ W}$ $U_{typ.} = 17.6 \text{ V}$		$P_{el} = 19 \text{ W}$ $U_{typ.} = 18.1 \text{ V}$			
DML068C27FR	557979	warm white	2700	780	132	1070	124	1435	117	1980	104	120	82
DML068C30FR	557980	warm white	3000	810	137	1110	129	1490	121	2055	108	120	82
DML068C30FBR	557981	warm white	3000 (below BBL)	775	131	1065	124	1425	116	1965	103	120	82
DML068C35FR	557982	neutral white	3500	835	142	1150	134	1540	125	2125	111	120	82
DML068C40FR	557983	neutral white	4000	860	146	1185	138	1585	129	2185	114	120	84
DML068C40FBR	557984	neutral white	4000 (below BBL)	825	140	1135	132	1520	124	2095	110	120	84
DML068C50FR	557985	cool white	5000	875	148	1205	140	1615	131	2225	116	120	84
DML068C65FR	557986	cool white	6500	870	147	1200	140	1605	130	2215	116	120	84
DML068S31FPR	557987	pearl white	3100	680	115	935	109	1260	102	1730	91	120	95
DML028				$P_{el} = 2 \text{ W}$ $U_{typ.} = 5.6 \text{ V}$		$P_{el} = 2.9 \text{ W}$ $U_{typ.} = 5.7 \text{ V}$		$P_{el} = 4.1 \text{ W}$ $U_{typ.} = 5.9 \text{ V}$		$P_{el} = 6.4 \text{ W}$ $U_{typ.} = 6.1 \text{ V}$			
DML028C27FR	558100	warm white	2700	245	125	340	119	455	111	625	98	120	82
DML028C30FR	558101	warm white	3000	255	130	355	125	475	116	655	103	120	82
DML028C30FBR	558102	warm white	3000 (below BBL)	245	125	340	119	455	111	625	98	120	82
DML028C35FR	559892	neutral white	3500	265	135	370	130	490	119	680	107	120	82
DML028C40FR	558103	neutral white	4000	270	138	375	132	500	122	685	108	120	84
DML028C40FBR	558104	neutral white	4000 (below BBL)	260	133	360	126	485	118	665	104	120	84
DML028C50FR	558105	cool white	5000	275	140	380	133	510	124	700	110	120	84
DML028C65FR	559893	cool white	6500	275	140	380	133	510	124	700	110	120	84
DML028S31FPR	558106	pearl white	3100	215	110	300	105	400	97	550	86	120	95

Emission data at $t_p = 65 \text{ °C}$ | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux and efficiency: $\pm 15 \%$ | Min. CRI R_a : > 80 / > 90

LUGA Line 2015 45 Chips

Built-in PCB lighting modules

The linear LED COB modules produce a very high lumen output.

The modules are available in warm white, neutral white and cool white; they can also be seamlessly connected (no gaps).

The ceramic PCB ensures optimum thermal management. Thanks to producing a homogeneous light field without any discernible individual light points, these LED modules are ideal for use with reflectors in luminaires constructed for T5 and T8 lamps.

Technical notes

Dimensions: 280x15 mm

On-board push terminal system

Allowed operating temperature at t_c point:

-40 to 85 °C

Use of external LED constant-current drivers

Ceramic PCB for optimum thermal management

Efficiency up to 160 lm/W

Colour rendering index R_a : > 80

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L_{90}/B_{10} :



55,000 hrs. (I_f 700 mA)

Packaging unit: 60 pcs.




Typical applications

- Office lighting
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting

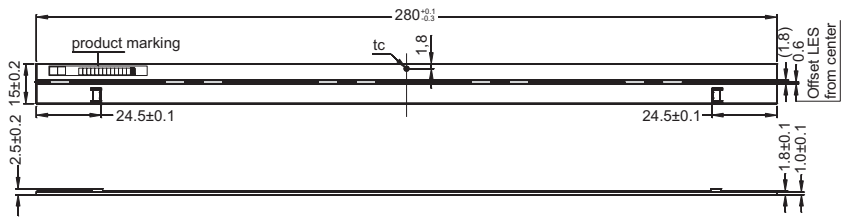

Connection example

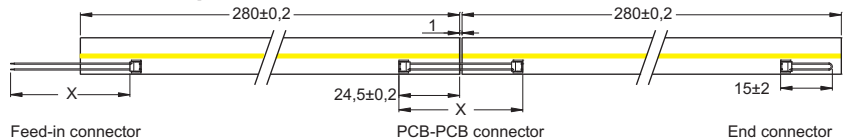

Type	Ref. No.	Number of LEDs pcs.	Colour	Correlated colour temperature* K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})**								Beam angle °	CRI R_a	
					350 mA		500 mA		700 mA		1050 mA			min.	typ.
					$P_{el} = 5.1$ W	$P_{el} = 7.7$ W	$P_{el} = 11.5$ W	$P_{el} = 19.1$ W							
					$U_{typ.} = 14.7$ V	$U_{typ.} = 15.4$ V	$U_{typ.} = 16.4$ V	$U_{typ.} = 18.2$ V							
LUGA Line 2015 with 45 LEDs															
DML059C27EC	556912	45	warm white	2700	725	142	1030	134	1400	122	2000	105	120	80	82
DML059C30EC	556926	45	warm white	3000	755	148	1075	140	1460	127	2080	109	120	80	82
DML059C30EBC	557228	45	warm white	3000 (below BBL)	715	140	1015	132	1380	120	1965	103	120	80	82
DML059C35EC	556927	45	neutral white	3500	775	152	1110	144	1500	130	2140	112	120	80	82
DML059C40EC	556928	45	neutral white	4000	800	157	1145	149	1550	135	2210	116	120	80	84
DML059C40EBC	557229	45	neutral white	4000 (below BBL)	745	146	1060	138	1440	125	2050	107	120	80	84
DML059C50EC	556929	45	cool white	5000	815	160	1165	151	1580	137	2250	118	120	80	84
DML059C65EC	556930	45	cool white	6500	805	158	1150	149	1560	136	2220	116	120	80	84

Emission data at $t_p = 65$ °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ± 10 %
Min. CRI R_a : > 80

Accessories for LUGA Line Modules

Other lead lengths on request

Feed-in connector

Feed in connector for power supply

Colour: - black

+ white

Max. permissible current: 1.5 A



Number of strands: 2

(Strand diameter: 0.09 mm²/AWG28)

Type: 893

Ref. No.: 551131 X = 310 mm

Ref. No.: 550952 X = 610 mm



1

2

3

4

5

6

7

8

9

10

11

12

PCB-PCB connector




Max. permissible current: 1.5 A

Type: 893

Ref. No.: 551129 X = 43 mm

Ref. No.: 549993 X = 61 mm


Ref. No.: 549992 X = 220 mm



End connector

Type: 893

Ref. No.: 551132



Plastic holder for LUGA Line modules

For fixing LUGA Line modules

Fixing hole for countersunk screw M3

With cable holder

Minimum required

3 pcs. per 1 LUGA Line module

5 pcs. per 2 LUGA Line modules


7 pcs. per 3 LUGA Line modules

Ref. No.: 551039

Thermally conductive adhesive tape

Dimensions: 278x13 mm

Ref. No.: 548179

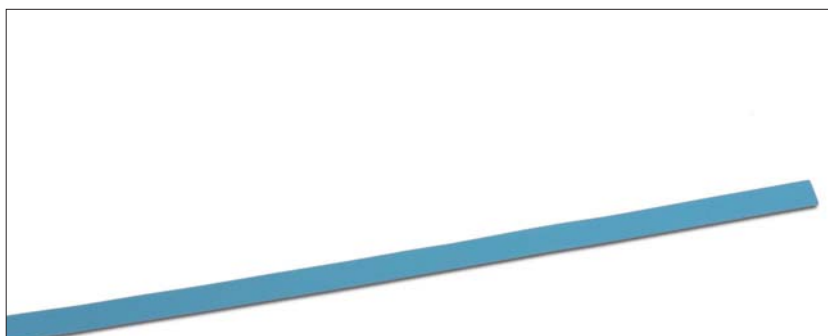

LED Line SMD Kit Gen. 2

Built-in PCB lighting modules with optics

The LED Line SMD Kit consists of SMD modules in two lengths (280 mm and 560 mm) as well as matching optics. LED modules and optics are an ideal LED solution to replace luminaires with T5/T8 lamps.

Both the optics and LED modules are easy to attach using standardised fixing holes (ZHAGA-compliant hole spacing) and screws.

VS also provides optics that are perfect for office, industrial and shop (e.g. supermarket) lighting.

Technical notes

Dimensions (LxW):

WU-M-480-G/501-G: 280x39.6 mm

WU-M-481-G/502-G: 560.6x39.6 mm

On-board push terminal system

Allowed operating temperature at t_c point:

-20 to 75 °C

Use of external LED constant-current drivers

Efficiency up to 183 lm/W

Colour rendering index $R_G > 80$

Lumen maintenance L80/B10:


60,000 hrs. (If 350 mA; t_p 50 °C)

Typical applications



- Office lighting
- Retail lighting
- Industrial lighting
- T5/T8 replacement as built-in module

Dimensions of SMD board




WU-M-480-G

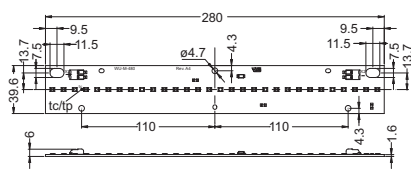


WU-M-501-G

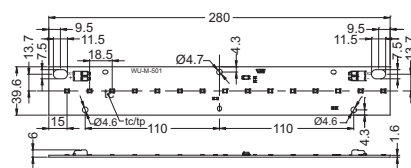


Without optics

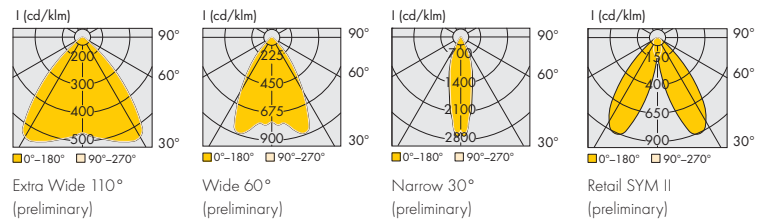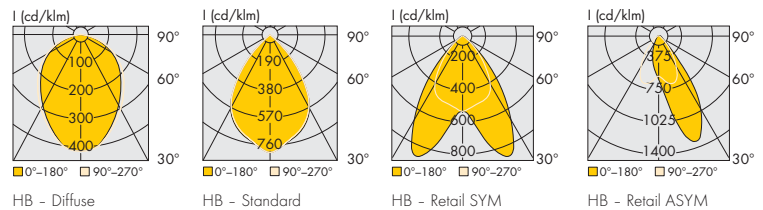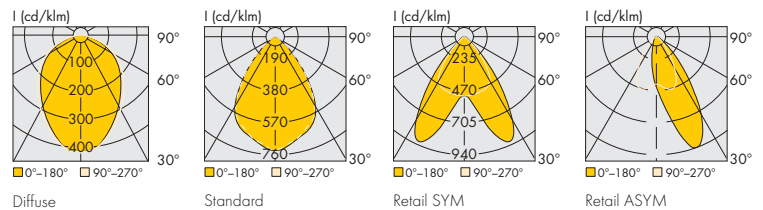

WU-M-481-G

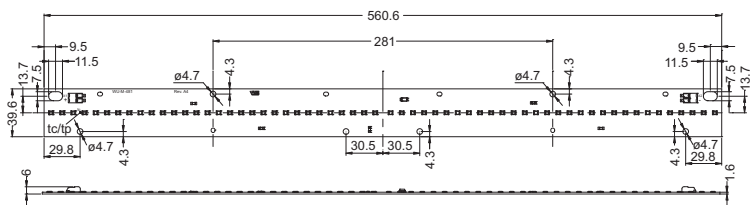

WU-M-502-G

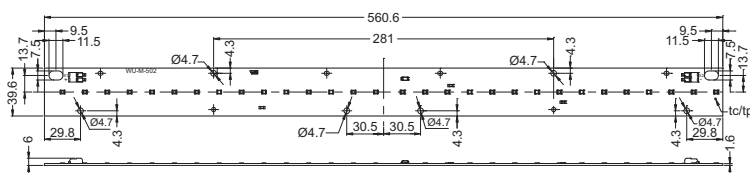


LED Line SMD Kit Gen. 2

Built-in PCB lighting modules with optics

Type	Ref. No.	Number of LEDs pcs.	Colour	Correlated colour temperature K	Luminous flux* (lm) and typical efficiency (lm/W), typical voltage (U _{typ.}) and power consumption (P _{el})									Beam angle °	CRI	
					350 mA			500 mA			700 mA				min. R _G	typ. R _G
					min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W			
280 mm – 30 LEDs					P _{el} = 4.9 W U _{typ.} = 13.9 V			P _{el} = 7.2 W U _{typ.} = 14.4 V			P _{el} = 10.5 W U _{typ.} = 15 V					
WU-M-480-G-830	560115	30	warm white	3000	720	780	160	1010	1100	152	1385	1500	143	120	80	85
WU-M-480-G-840	560116	30	neutral white	4000	750	820	168	1055	1150	159	1445	1570	150	120	80	85
WU-M-480-G-850	560117	30	neutral white	5000	780	890	183	1100	1255	174	1500	1715	164	120	80	85
WU-M-480-G-865	560118	30	cool white	6500	780	860	176	1100	1205	168	1500	1650	158	120	80	85
560 mm – 60 LEDs					P _{el} = 9.8 W U _{typ.} = 27.9 V			P _{el} = 14.4 W U _{typ.} = 28.8 V			P _{el} = 20.9 W U _{typ.} = 29.9 V					
WU-M-481-G-830	560123	60	warm white	3000	1440	1565	160	2020	2195	152	2765	3005	143	120	80	85
WU-M-481-G-840	560124	60	neutral white	4000	1500	1635	168	2110	2295	159	2885	3145	150	120	80	85
WU-M-481-G-850	560125	60	neutral white	5000	1565	1785	183	2195	2505	174	3005	3430	164	120	80	85
WU-M-481-G-865	560126	60	cool white	6500	1565	1720	176	2195	2415	168	3005	3300	158	120	80	85
280 mm – 15 LEDs					P _{el} = 3 W U _{typ.} = 8.5 V			P _{el} = 4.4 W U _{typ.} = 8.8 V			P _{el} = 6.4 W U _{typ.} = 9.2 V					
WU-M-501-G-830	560131	15	warm white	3000	430	465	156	600	650	148	815	885	138	120	80	85
WU-M-501-G-840	560132	15	neutral white	4000	445	485	164	625	680	155	850	930	144	120	80	85
WU-M-501-G-850	560133	15	neutral white	5000	465	530	179	650	745	169	885	1010	157	120	80	85
WU-M-501-G-865	560134	15	cool white	6500	465	510	172	650	715	162	885	975	151	120	80	85
560 mm – 30 LEDs					P _{el} = 6 W U _{typ.} = 17 V			P _{el} = 8.8 W U _{typ.} = 17.6 V			P _{el} = 12.9 W U _{typ.} = 18.4 V					
WU-M-502-G-830	560135	30	warm white	3000	855	930	156	1200	1300	148	1635	1775	138	120	80	85
WU-M-502-G-840	560136	30	neutral white	4000	895	975	164	1250	1365	155	1705	1855	144	120	80	85
WU-M-502-G-850	560137	30	neutral white	5000	930	1065	179	1300	1485	169	1775	2025	157	120	80	85
WU-M-502-G-865	560138	30	cool white	6500	930	1025	172	1300	1430	162	1775	1950	151	120	80	85
High Brightness – 280 mm – 30 LEDs					P _{el} = 9.7 W U _{typ.} = 27.8 V			P _{el} = 14.3 W U _{typ.} = 28.6 V			P _{el} = 20.7 W U _{typ.} = 29.6 V					
WU-M-480-G-HB-830	560119	30	warm white	3000	1305	1455	149	1835	2040	143	2505	2790	135	120	80	85
WU-M-480-G-HB-840	560120	30	neutral white	4000	1360	1535	158	1910	2155	151	2610	2945	142	120	80	85
WU-M-480-G-HB-850	560121	30	neutral white	5000	1420	1605	165	1990	2255	158	2720	3080	149	120	80	85
WU-M-480-G-HB-865	560122	30	cool white	6500	1420	1570	161	1990	2205	154	2720	3010	145	120	80	85
High Brightness – 560 mm – 60 LEDs					P _{el} = 19.5 W U _{typ.} = 55.6 V			P _{el} = 28.6 W U _{typ.} = 57.1 V			P _{el} = 41.4 W U _{typ.} = 59.2 V					
WU-M-481-G-HB-830	560127	60	warm white	3000	2610	2905	149	3665	4080	143	5010	5575	135	120	80	85
WU-M-481-G-HB-840	560128	60	neutral white	4000	2720	3070	158	3815	4310	151	5215	5890	142	120	80	85
WU-M-481-G-HB-850	560129	60	neutral white	5000	2840	3210	165	3985	4505	158	5445	6160	149	120	80	85
WU-M-481-G-HB-865	560130	60	cool white	6500	2840	3140	161	3985	4410	154	5445	6025	145	120	80	85
High Brightness – 280 mm – 15 LEDs					P _{el} = 5.9 W U _{typ.} = 16.9 V			P _{el} = 8.8 W U _{typ.} = 17.5 V			P _{el} = 12.7 W U _{typ.} = 18.2 V					
WU-M-501-G-HB-830	560139	15	warm white	3000	775	865	146	1085	1210	139	1480	1645	129	120	80	85
WU-M-501-G-HB-840	560140	15	neutral white	4000	810	915	155	1130	1280	146	1540	1735	137	120	80	85
WU-M-501-G-HB-850	560141	15	neutral white	5000	845	955	162	1180	1335	153	1605	1815	143	120	80	85
WU-M-501-G-HB-865	560142	15	cool white	6500	845	935	158	1180	1305	150	1605	1775	140	120	80	85
High Brightness – 560 mm – 30 LEDs					P _{el} = 11.8 W U _{typ.} = 33.8 V			P _{el} = 17.4 W U _{typ.} = 34.9 V			P _{el} = 25.4 W U _{typ.} = 36.3 V					
WU-M-502-G-HB-830	560143	30	warm white	3000	1555	1730	146	2175	2420	139	2955	3285	129	120	80	85
WU-M-502-G-HB-840	560144	30	neutral white	4000	1620	1825	155	2260	2555	146	3075	3470	137	120	80	85
WU-M-502-G-HB-850	560145	30	neutral white	5000	1690	1910	162	2360	2670	153	3210	3630	143	120	80	85
WU-M-502-G-HB-865	560146	30	cool white	6500	1690	1870	158	2360	2615	150	3210	3550	140	120	80	85

* Measurement tolerance: ± 7% | CRI > 90 on request



LED Line SMD Kit Gen. 2


Technical notes optics

Dimensions: 280x43 mm, can be joined together, for modules 280 mm, 560 mm and module chains

Material: PMMA

Fixation with flat or cylinder head screws (M4)

Max. torque: 1.2 Nm (M4)

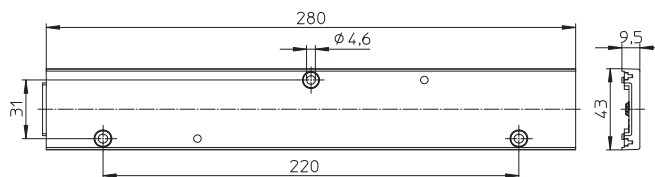

Optics type	Ref. No.	Efficiency %	Weight g	Packaging unit pcs.
Standard	555437	95	50	192
Diffus	559972	88	50	192
Extra Wide 110°	560570	95	105.8	126
Wide 60°	560573	95	87.6	126
Narrow 30°	560571	95	93.8	126
Retail SYM	555438	95	50	192
Retail SYM II	560572	95	90.8	126
Retail ASYM	555439	95	50	192


End cap

Lateral tongue and groove for optics attachment

Weight: 0.9 g, packaging unit: 500 pcs.

Type: 98810

Ref. No.: **555482**



PCB-Clip

For simple and reliable fastening of LED PCBs without screws

For fastening LED PCBs to luminaire sheets or aluminium profiles without screws.

Suitable for f.e. the following LED modules:

WU-M-480/-481/-501/-502

Dimensions (LxWxH): 12x4.7x5.8 mm

Material: Metal clip with silicone pad


For PCB fixing holes: 4.3–4.8 mm

For luminaire sheet cut-out: 3.7x3.7 mm

Packaging unit: 2000 pcs.

Type: 99000

Ref. No.: **558363**



LED Line SMD Kit 3R

Built-in PCB lighting modules with optics

The LED Line SMD Kit 3R consists of an SMD module (length: 280 mm) as well as matching optics. LED modules and optics are an ideal LED solution to replace luminaires with T5/T8 lamps.

Both the optics and LED modules are easy to attach using standardised fixing holes (ZHAGA-compliant hole spacing) and screws.

VS also provides optics that are perfect for office, industrial and shop (e.g. supermarket) lighting.

Technical notes

Dimensions: 280x55 mm

On-board push terminal system

Allowed operating temperature at t_c point:

-20 to 75 °C

Use of external LED constant-current drivers

Efficiency up to 186 lm/W



Colour rendering index R_a : > 80

Lumen maintenance L80/B10:


60,000 hrs. (I_f 350 mA; t_p 50 °C)

Typical applications


- Office lighting
- Retail lighting
- Industrial lighting
- T5/T8 replacement as luminaire built-in module

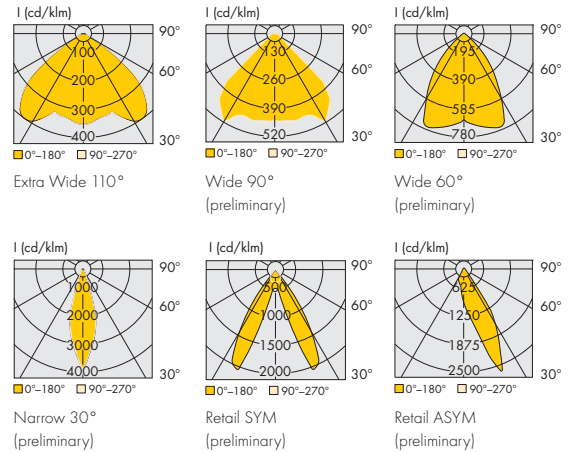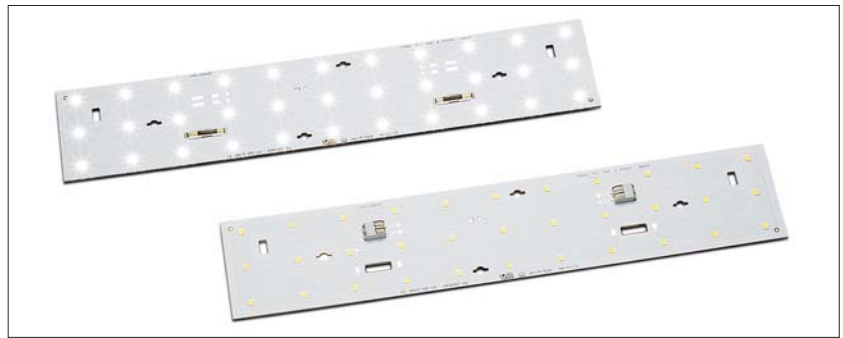

WU-M-526-BC

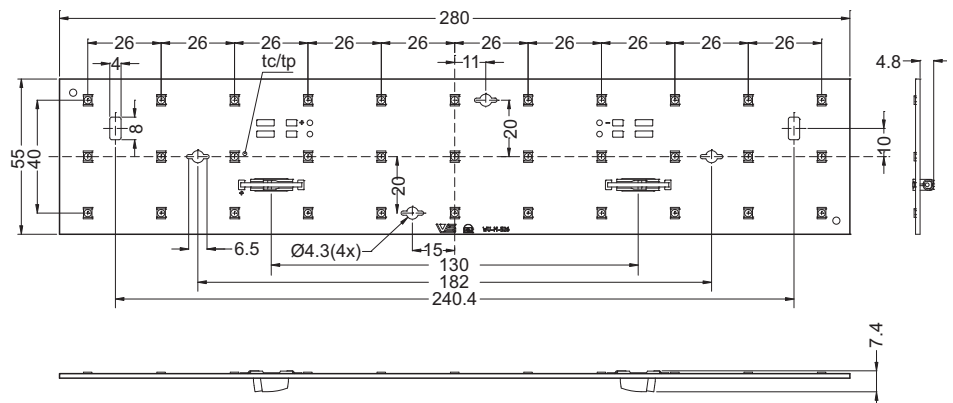

WU-M-526-TC

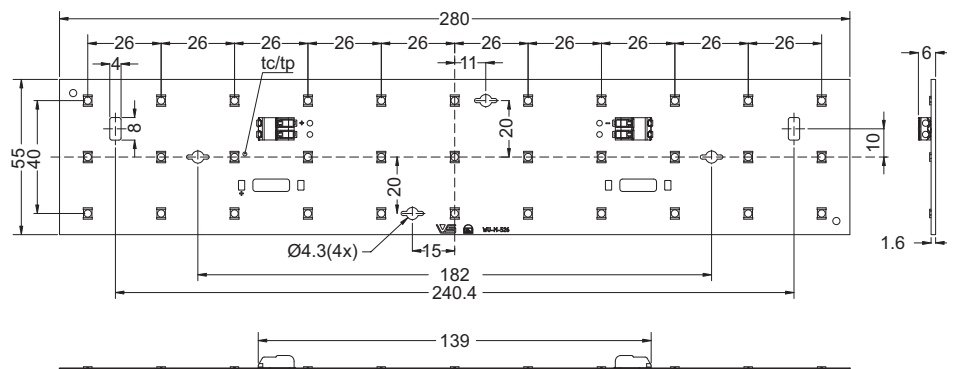

LED Line SMD Kit 3R

Type	Ref. No.	Colour	Correlated colour temperature K	Luminous flux* (lm) and typical efficiency (lm/W), typical voltage (U _{typ.}) and power consumption (P _{el})												Beam angle* °	CRI	
				150 mA			200 mA			350 mA			500 mA				min. R _a	typ. R _a
				min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W			
				P _{el} = 4.5 W U _{typ.} = 30.3 V			P _{el} = 6.2 W U _{typ.} = 31 V			P _{el} = 11.5 W U _{typ.} = 32.9 V			P _{el} = 17.3 W U _{typ.} = 34.5 V					
WU-M-526 TopConnected (TC)																		
WU-M-526-TC-830	560366	warm white	3000	680	740	163	900	975	157	1520	1650	143	2095	2280	132	120	80	85
WU-M-526-TC-840	560680	neutral white	4000	710	775	170	940	1020	165	1585	1730	150	2190	2385	138	120	80	85
WU-M-526-TC-850	561056	neutral white	5000	740	845	186	975	1115	180	1650	1885	164	2280	2600	151	120	80	85
WU-M-526-TC-865	561057	cool white	6500	740	815	179	975	1075	173	1650	1815	158	2280	2505	145	120	80	85
WU-M-526 BottomConnected (BC)																		
WU-M-526-BC-830	561061	warm white	3000	680	740	163	900	975	157	1520	1650	143	2095	2280	132	120	80	85
WU-M-526-BC-840	560716	neutral white	4000	710	775	170	940	1020	165	1585	1730	150	2190	2385	138	120	80	85
WU-M-526-BC-850	561062	neutral white	5000	740	845	186	975	1115	180	1650	1885	164	2280	2600	151	120	80	85
WU-M-526-BC-865	561063	cool white	6500	740	815	179	975	1075	173	1650	1815	158	2280	2505	145	120	80	85

* Measurement tolerance: ±7% | CRI > 90 on request

Technical notes for optics

Dimensions (LxWxH): 285.4x62x11.25 mm

can be joined together,

for modules 280 mm, 560 mm and module chains.

Material: PMMA

Front-side groove or tongue to attach optics in series

Max. allowed ambient temperature $t_{a\ max.} = 55\ ^\circ\text{C}$

Fixation with flat or cylinder head screws (M4)

Max. torque: 1.2 Nm (M4)

Optics type	Ref. No.	Efficiency %	Weight g	Packaging unit (pcs.)
Extra Wide 110°	560371	95	105.8	120
Wide 90°	560376	95	117.7	120
Wide 60°	560372	95	87.6	120
Narrow 30°	560375	95	93.8	120
Retail SYM	560373	95	90.8	120
Retail ASYM	560374	95	96.8	120

End cap

Lateral attachment on the optics

(on the side of the groove or tongue)

With fixing clips


Weight: 1.6/1 g, Packaging unit: 250 pcs.

Type: 994


Ref. No.: 560377 end cap for tongue side

Ref. No.: 560378 end cap for groove side


Optics

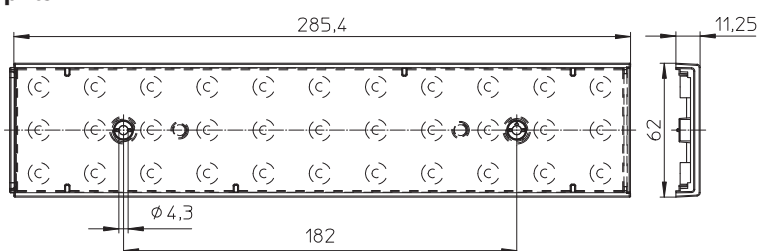

End cap

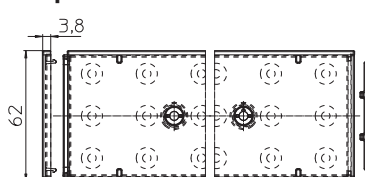

Assembly

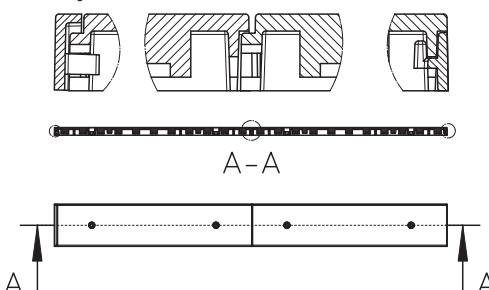

LED Line SMD Gen. 2 – L14/28/56 W2

Built-in PCB lighting modules

The SMD PCB LED Line SMD L14/28/56 W2 is optimally suited for use in classic T5/T8 luminaires. Available in three different lengths (140 mm, 280 mm and 560 mm), the LED modules are easy to fix.

Technical notes

Dimensions:

WU-M-G-507/508: 140x20 mm

WU-M-G-509/510: 280x20 mm

WU-M-G-511/512: 560x20 mm

Fixation with M3 screws, screw head: Ø 6 mm

On-board push-in terminals (WAGO 2060)

Allowed operating temperature at t_c point:

-20 to 75 °C

Use of external LED constant-current drivers

Aluminium PCB for optimum thermal management

Efficiency up to 179 lm/W



Colour rendering index R_a : > 80

Lumen maintenance L80/B10:


up to 60,000 hrs. (I_f 700 mA, t_p = 50 °C)

Typical applications


- Installation in luminaires for general lighting purposes
- Office lighting
- Retail, corridor and shelf lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising




WU-M-507

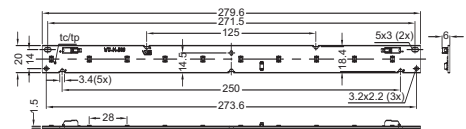


WU-M-509




WU-M-508

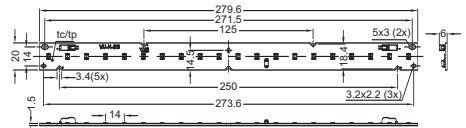

WU-M-510

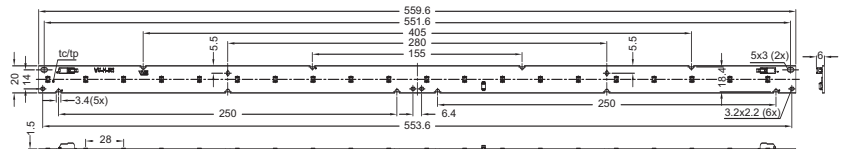

WU-M-511

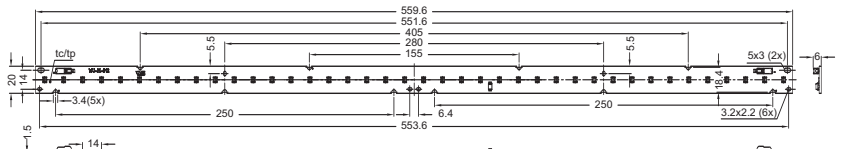

WU-M-512

Connection example



LED Line SMD Gen. 2 – L14/28/56 W2

Built-in PCB lighting modules

Type	Ref. No.	Number of LEDs pcs.	Colour	Correlated colour temperature K	Luminous flux* (lm) and typ. efficiency (lm/W), typ. voltage (U _{typ.}) and power consumption (P _{el})									Beam angle °	CRI	
					350 mA			500 mA			700 mA				min. R _a	typ. R _a
					min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W			
L14 W2 – 5 SMDs					P _{el} = 0.99 W U _{typ.} = 2.83 V			P _{el} = 1.47 W U _{typ.} = 2.94 V			P _{el} = 2.15 W U _{typ.} = 3.07 V					
WU-M-507-G-830	560176	5	warm white	3000	145	155	156	200	215	148	270	295	138	120	80	85
WU-M-507-G-840	560177	5	neutral white	4000	150	160	164	210	225	155	285	310	144	120	80	85
WU-M-507-G-850	560179	5	neutral white	5000	155	175	179	215	250	169	295	335	157	120	80	85
WU-M-507-G-865	560180	5	cool white	6500	155	170	172	215	240	162	295	325	151	120	80	85
L14 W2 – 10 SMDs					P _{el} = 1.98 W U _{typ.} = 5.67 V			P _{el} = 2.94 W U _{typ.} = 5.88 V			P _{el} = 4.29 W U _{typ.} = 6.13 V					
WU-M-508-G-830	560164	10	warm white	3000	285	310	156	400	435	148	545	590	138	120	80	85
WU-M-508-G-840	560165	10	neutral white	4000	300	325	164	415	455	155	570	620	144	120	80	85
WU-M-508-G-850	560166	10	neutral white	5000	310	355	179	435	495	169	590	675	157	120	80	85
WU-M-508-G-865	560167	10	cool white	6500	310	340	172	435	475	162	590	650	151	120	80	85
L28 W2 – 10 SMDs					P _{el} = 1.98 W U _{typ.} = 5.67 V			P _{el} = 2.94 W U _{typ.} = 5.88 V			P _{el} = 4.29 W U _{typ.} = 6.13 V					
WU-M-509-G-830	560181	10	warm white	3000	285	310	156	400	435	148	545	590	138	120	80	85
WU-M-509-G-840	560182	10	neutral white	4000	300	325	164	415	455	155	570	620	144	120	80	85
WU-M-509-G-850	560183	10	neutral white	5000	310	355	179	435	495	169	590	675	157	120	80	85
WU-M-509-G-865	560184	10	cool white	6500	310	340	172	435	475	162	590	650	151	120	80	85
L28 W2 – 20 SMDs					P _{el} = 3.97 W U _{typ.} = 11.33 V			P _{el} = 5.88 W U _{typ.} = 11.76 V			P _{el} = 8.58 W U _{typ.} = 12.26 V					
WU-M-510-G-830	560168	20	warm white	3000	570	620	156	800	870	148	1090	1180	138	120	80	85
WU-M-510-G-840	560169	20	neutral white	4000	595	650	164	835	910	155	1135	1235	144	120	80	85
WU-M-510-G-850	560170	20	neutral white	5000	620	710	179	870	990	169	1180	1350	157	120	80	85
WU-M-510-G-865	560171	20	cool white	6500	620	680	172	870	955	162	1180	1300	151	120	80	85
L56 W2 – 20 SMDs					P _{el} = 3.97 W U _{typ.} = 11.33 V			P _{el} = 5.88 W U _{typ.} = 11.76 V			P _{el} = 8.58 W U _{typ.} = 12.26 V					
WU-M-511-G-830	560185	20	warm white	3000	570	620	156	800	870	148	1090	1180	138	120	80	85
WU-M-511-G-840	560186	20	neutral white	4000	595	650	164	835	910	155	1135	1235	144	120	80	85
WU-M-511-G-850	560187	20	neutral white	5000	620	710	179	870	990	169	1180	1350	157	120	80	85
WU-M-511-G-865	560188	20	cool white	6500	620	680	172	870	955	162	1180	1300	151	120	80	85
L56 W2 – 40 SMDs					P _{el} = 7.93 W U _{typ.} = 22.66 V			P _{el} = 11.76 W U _{typ.} = 23.51 V			P _{el} = 17.17 W U _{typ.} = 24.53 V					
WU-M-512-G-830	560172	40	warm white	3000	1140	1240	156	1600	1735	148	2175	2365	138	120	80	85
WU-M-512-G-840	560173	40	neutral white	4000	1190	1300	164	1670	1815	155	2270	2475	144	120	80	85
WU-M-512-G-850	560174	40	neutral white	5000	1240	1415	179	1735	1985	169	2365	2700	157	120	80	85
WU-M-512-G-865	560175	40	cool white	6500	1240	1365	172	1735	1910	162	2365	2600	151	120	80	85

* Measuring tolerance of luminous flux: ± 7% | CRI > 90 on request

LED Line SMD Gen. 2 – L14/28/56 W2

Built-in PCB lighting modules

Type	Ref. No.	Number of LEDs pcs.	Colour	Correlated colour temperature K	Luminous flux* (lm) and typ. efficiency (lm/W), typical voltage (U _{typ.}) and power consumption (P _{el.})									Beam angle °	CRI	
					350 mA			500 mA			700 mA				min. R _o	typ. R _o
					min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W	min. lm	typ. lm	typ. lm/W			
High Brightness – L14 W2 – 5 SMDs					P _{el.} = 1.97 W U _{typ.} = 5.63 V			P _{el.} = 2.91 W U _{typ.} = 5.82 V			P _{el.} = 4.24 W U _{typ.} = 6.05 V					
WU-M-507-G-HB-830	560201	5	warm white	3000	260	290	146	360	405	139	495	550	129	120	80	85
WU-M-507-G-HB-840	560202	5	neutral white	4000	270	305	155	375	425	146	515	580	137	120	80	85
WU-M-507-G-HB-850	560203	5	neutral white	5000	280	320	162	395	445	153	535	605	143	120	80	85
WU-M-507-G-HB-865	560204	5	cool white	6500	280	310	158	395	435	150	535	590	140	120	80	85
High Brightness – L14 W2 – 10 SMDs					P _{el.} = 3.94 W U _{typ.} = 11.26 V			P _{el.} = 5.82 W U _{typ.} = 11.36 V			P _{el.} = 8.47 W U _{typ.} = 12.10 V					
WU-M-508-G-HB-830	560189	10	warm white	3000	520	575	146	725	805	139	985	1095	129	120	80	85
WU-M-508-G-HB-840	560190	10	neutral white	4000	540	610	155	755	850	146	1025	1160	137	120	80	85
WU-M-508-G-HB-850	560191	10	neutral white	5000	565	635	162	785	890	153	1070	1210	143	120	80	85
WU-M-508-G-HB-865	560192	10	cool white	6500	565	625	158	785	870	150	1070	1185	140	120	80	85
High Brightness – L28 W2 – 10 SMDs					P _{el.} = 3.94 W U _{typ.} = 11.26 V			P _{el.} = 5.82 W U _{typ.} = 11.36 V			P _{el.} = 8.47 W U _{typ.} = 12.10 V					
WU-M-509-G-HB-830	560205	10	warm white	3000	520	575	146	725	805	139	985	1095	129	120	80	85
WU-M-509-G-HB-840	560206	10	neutral white	4000	540	610	155	755	850	146	1025	1160	137	120	80	85
WU-M-509-G-HB-850	560207	10	neutral white	5000	565	635	162	785	890	153	1070	1210	143	120	80	85
WU-M-509-G-HB-865	560208	10	cool white	6500	565	625	158	785	870	150	1070	1185	140	120	80	85
High Brightness – L28 W2 – 20 SMDs					P _{el.} = 7.89 W U _{typ.} = 22.53 V			P _{el.} = 11.64 W U _{typ.} = 23.27 V			P _{el.} = 16.94 W U _{typ.} = 24.20 V					
WU-M-510-G-HB-830	560193	20	warm white	3000	1035	1155	146	1450	1610	139	1970	2190	129	120	80	85
WU-M-510-G-HB-840	560194	20	neutral white	4000	1080	1220	155	1510	1705	146	2050	2315	137	120	80	85
WU-M-510-G-HB-850	560195	20	neutral white	5000	1125	1275	162	1575	1780	153	2140	2420	143	120	80	85
WU-M-510-G-HB-865	560196	20	cool white	6500	1125	1245	158	1575	1745	150	2140	2370	140	120	80	85
High Brightness – L56 W2 – 20 SMDs					P _{el.} = 7.89 W U _{typ.} = 22.53 V			P _{el.} = 11.64 W U _{typ.} = 23.27 V			P _{el.} = 16.94 W U _{typ.} = 24.20 V					
WU-M-511-G-HB-830	560209	20	warm white	3000	1035	1155	146	1450	1615	139	1970	2190	129	120	80	85
WU-M-511-G-HB-840	560210	20	neutral white	4000	1080	1220	155	1510	1705	146	2050	2315	137	120	80	85
WU-M-511-G-HB-850	560211	20	neutral white	5000	1125	1275	162	1575	1780	153	2140	2420	143	120	80	85
WU-M-511-G-HB-865	560212	20	cool white	6500	1125	1245	158	1575	1745	150	2140	2370	140	120	80	85
High Brightness – L56 W2 – 40 SMDs					P _{el.} = 15.77 W U _{typ.} = 45.05 V			P _{el.} = 23.27 W U _{typ.} = 46.53 V			P _{el.} = 33.88 W U _{typ.} = 48.40 V					
WU-M-512-G-HB-830	560197	40	warm white	3000	2075	2305	146	2900	3225	139	3940	4385	129	120	80	85
WU-M-512-G-HB-840	560198	40	neutral white	4000	2155	2435	155	3015	3405	146	4100	4630	137	120	80	85
WU-M-512-G-HB-850	560199	40	neutral white	5000	2250	2550	162	3150	3565	153	4280	4840	143	120	80	85
WU-M-512-G-HB-865	560200	40	cool white	6500	2250	2490	158	3150	3485	150	4280	4735	140	120	80	85

* Measuring tolerance of luminous flux: ± 7% | CRI > 90 on request

1

2

3

4

5

6

7

8

9

10

11

12

LED Line SMD Slim Gen. 2

Lighting modules with cover

LED Line SMD Slim consists of an energy-efficient linear SMD module and a cover with several attachment options. The module was designed for integration into indoor luminaires providing direct or indirect light.



The fast, safe and flexible adhesive-based, click on (ZHAGA-compliant L56W2 hole spacing) or screw-based options for fixing the module within the luminaire constitute an ideal solution for linear lighting applications.

The light module is fitted with either a clear or diffuse cover that serves to protect it and, in the diffuse version, to reduce glare and distribute light in a similar manner to a fluorescent lamp.

Technical notes

Dimensions

WU-M-499-G: 280x14.5 mm

WU-M-500-G: 560x14.5 mm

On-board push-in terminals

Allowed operating temperature at t_c point:

-20 at 75 °C


Use of external LED constant-current drivers required

Efficiency up to 183 lm/W

Colour rendering index R_a : min. 80

Lumen maintenance L80/B10:

> 60,000 hrs. (I_F 700 mA, $t_p = 50$ °C)

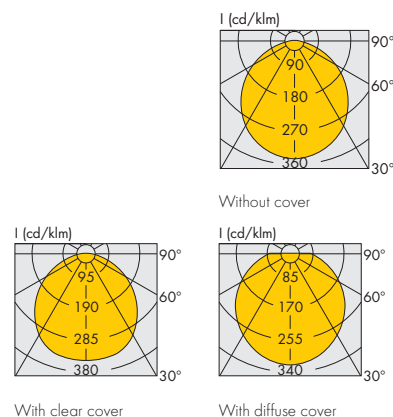


Typical applications

Built-in luminaires/general illumination:


- Office lighting
- Retail, corridor and shelf lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

Mechanical dimensions of SMD board

WU-M-499-G

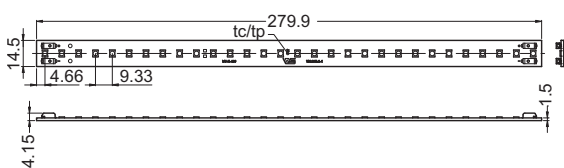

WU-M-500-G

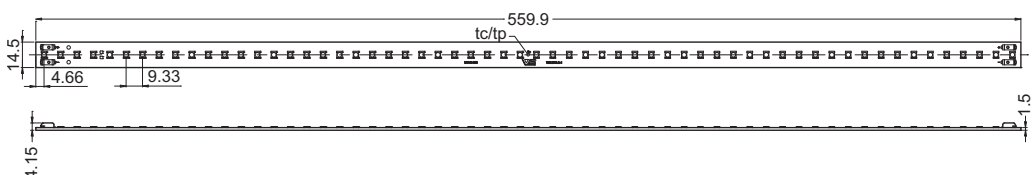

LED Line SMD Slim Gen. 2

Optical characteristics

at $t_p = 50\text{ °C}$; without secondary optics

The specified values apply only to the version of the LED module without a cover.

The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)

Type	Ref. No.	Number of LEDs pcs	Colour	Correlated colour temperature K	Luminous flux* and typ. efficiency, typ. voltage ($U_{typ.}$) and power consumption (P_{el})									Beam angle °	CRI	
					350 mA			500 mA			700 mA				min.	typ.
					min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	°	min.	typ.
280 mm					$P_{el} = 4.9\text{ W}$ $U_{typ.} = 13.9\text{ V}$			$P_{el} = 7.2\text{ W}$ $U_{typ.} = 14.4\text{ V}$			$P_{el} = 10.5\text{ W}$ $U_{typ.} = 15\text{ V}$					
WU-M-499-G-830	560147	30	warm white	3000	720	780	160	1010	1100	152	1385	1500	143	120	80	85
WU-M-499-G-840	560148	30	neutral white	4000	750	820	168	1055	1150	159	1445	1570	150	120	80	85
WU-M-499-G-850	560149	30	neutral white	5000	780	890	183	1100	1255	174	1500	1715	164	120	80	85
WU-M-499-G-865	560150	30	cool white	6500	780	860	176	1100	1205	168	1500	1650	158	120	80	85
560 mm					$P_{el} = 9.8\text{ W}$ $U_{typ.} = 27.9\text{ V}$			$P_{el} = 14.4\text{ W}$ $U_{typ.} = 28.8\text{ V}$			$P_{el} = 20.9\text{ W}$ $U_{typ.} = 29.9\text{ V}$					
WU-M-500-G-830	560152	60	warm white	3000	1440	1565	160	2020	2195	152	2765	3005	143	120	80	85
WU-M-500-G-840	560153	60	neutral white	4000	1500	1635	168	2110	2295	159	2885	3145	150	120	80	85
WU-M-500-G-850	560154	60	neutral white	5000	1565	1785	183	2195	2505	174	3005	3430	164	120	80	85
WU-M-500-G-865	560155	60	cool white	6500	1565	1720	176	2195	2415	168	3005	3300	158	120	80	85
High Brightness – 280 mm					$P_{el} = 9.7\text{ W}$ $U_{typ.} = 27.8\text{ V}$			$P_{el} = 14.3\text{ W}$ $U_{typ.} = 28.6\text{ V}$			$P_{el} = 20.7\text{ W}$ $U_{typ.} = 29.6\text{ V}$					
WU-M-499-G-HB-830	560156	30	warm white	3000	1305	1455	149	1835	2040	143	2505	2790	135	120	80	85
WU-M-499-G-HB-840	560157	30	neutral white	4000	1360	1535	158	1910	2155	151	2610	2945	142	120	80	85
WU-M-499-G-HB-850	560158	30	neutral white	5000	1420	1605	165	1990	2255	158	2725	3080	149	120	80	85
WU-M-499-G-HB-865	560159	30	cool white	6500	1420	1570	161	1990	2205	154	2725	3015	146	120	80	85
High Brightness – 560 mm					$P_{el} = 19.5\text{ W}$ $U_{typ.} = 55.6\text{ V}$			$P_{el} = 28.6\text{ W}$ $U_{typ.} = 57.1\text{ V}$			$P_{el} = 41.4\text{ W}$ $U_{typ.} = 59.2\text{ V}$					
WU-M-500-G-HB-830	560160	60	warm white	3000	2610	2905	149	3665	4080	143	5010	5575	135	120	80	85
WU-M-500-G-HB-840	560161	60	neutral white	4000	2720	3070	158	3815	4310	151	5215	5890	142	120	80	85
WU-M-500-G-HB-850	560162	60	neutral white	5000	2840	3210	165	3985	4505	158	5445	6160	149	120	80	85
WU-M-500-G-HB-865	560163	60	cool white	6500	2840	3140	161	3985	4410	154	5445	6025	145	120	80	85

* Measurement tolerance of luminous flux: $\pm 7\%$ | CRI > 90 on request

Reference numbers – Module length: 280 mm

Fixing	For tape fixing - type: 89510		For screw fixing - type: 89511		For clip fixing - type: 89512	
	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse
280 mm						
SMD0283000	561199	561203	561207	561211	561215	561219
SMD0284000	561200	561204	561208	561212	561216	561220
SMD0285000	561201	561205	561209	561213	561217	561221
SMD0286500	561202	561206	561210	561214	561218	561222
High Brightness – 280 mm						
SMD0283000	561223	561227	561231	561235	561239	561243
SMD0284000	561224	561228	561232	561236	561240	561244
SMD0285000	561225	561229	561233	561237	561241	561245
SMD0286500	561226	561230	561234	561238	561242	561246

LED Line SMD Slim Gen. 2

Reference numbers – Module length: 560 mm

Fixing	For tape fixing – type: 89560		For screw fixing – type: 89561		For clip fixing – type: 89562	
Cover	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse

560 mm

SMD0563000	561247	561251	561255	561259	561263	561267
SMD0564000	561248	561252	561256	561260	561264	561268
SMD0565000	561249	561253	561257	561261	561265	561269
SMD0566500	561250	561254	561258	561262	561266	561270

High Brightness – 560 mm

SMD0563000	561271	561275	561279	561283	561287	561291
SMD0564000	561272	561276	561280	561284	561288	561292
SMD0565000	561273	561277	561281	561285	561289	561293
SMD0566500	561274	561278	561282	561286	561290	561294

LED Line SMD Slim for tape fixing

With cover for tape fixing

With base thermal tapes pre-assembled


Degree of protection: IP20

Weight: 30.5/67 g, packaging unit: 6 pcs.


Type: 89510/89560

Module length mm	Drawing	Dimensions (LxWxH) mm
280	A	285x24x10.5
560	B	565x24x10.5

A – For tape fixing – type 89510 – LED Line SMD Slim 280



B – For tape fixing – type 89560 – LED Line SMD Slim 560



LED Line SMD Slim for screw fixing

With cover for screw fixing

Fixing holes for screws M4

Tightening torque: 0.6-0.7 Nm

With base thermal tapes pre-assembled


Degree of protection: IP20

Weight: 31/69 g, packaging unit: 4 pcs.


Type: 89511/89561

Module length mm	Drawing	Dimensions (LxWxH) mm
280	C	285x39x10.5
560	D	565x39x10.5

C – For screw fixing – type 89511 – LED Line SMD Slim 280



D – For screw fixing – type 89561 – LED Line SMD Slim 560



LED Line SMD Slim for clip fixing

With cover for clip fixing

Base fixing clips for wall thickness 0.4-1 mm

With base thermal tapes pre-assembled


Degree of protection: IP20

Weight: 30.5/68 g, packaging unit: 6 pcs.


Type: 89512/89562

Module length mm	Drawing	Dimensions (LxWxH) mm
280	E	285x24x10.5
560	F	565x24x10.5

E – For clip fixing – type 89512 – LED Line SMD Slim 280



F – For clip fixing – type 89562 – LED Line SMD Slim 560



LED Line Fix LUGA 2015

Lighting modules with holder and cover

LED Line Fix LUGA consists of an energy-efficient linear COB module, a holder with various attachment options and a cover. The module was designed for integration into indoor luminaires providing direct or indirect light.

The fast, safe and flexible adhesive-based, click on (ZHAGA-compliant L28/L56W4 hole spacing) or screw-based options for fixing the module within the luminaire constitute an ideal solution for linear lighting applications.

The light module forms a single unit consisting of a holder made of a thermoconductive polymer plus a clear or diffuse cover that protects the LED module and electrically isolates it from the luminaire.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Technical notes LUGA Line module

On-board push terminal system: Electrical connection with lateral connection leads 28AWG

Allowed operating temperature at t_c point:
-40 to 85 °C

Efficiency up to 157 lm/W

Colour rendering index R_a : > 80

Colour accuracy initially: 3 SDCM;


after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L90/B10:

55,000 hrs. (I_f 700 mA)

Typical applications

- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps

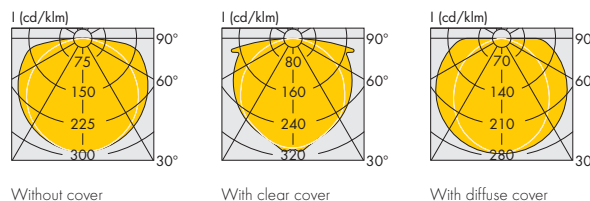

Without cover

With clear cover

With diffuse cover

1

2

3

4

5

6

7

8

9

10

11

12

LED Line Fix LUGA 2015

Optical characteristics

at $t_p = 65\text{ °C}$

The specified values apply only to the version of the LED module without a cover.

The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)

Type	Number of LEDs pcs.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el}) *								Beam angle °	Typ. CRI R_a
				350 mA		500 mA		700 mA		1050 mA			
				P_{el} = 5.1 W $U_{typ.}$ = 14.7 V	P_{el} = 7.7 W $U_{typ.}$ = 15.4 V	P_{el} = 11.5 W $U_{typ.}$ = 16.4 V	P_{el} = 19.1 W $U_{typ.}$ = 18.2 V						
280 mm													
DML059C27EC	45	warm white	2700	725	142	1030	142	1400	122	2000	105	120	82
DML059C30EC	45	warm white	3000	755	148	1075	148	1460	127	2080	109	120	82
DML059C40EC	45	neutral white	4000	800	157	1145	157	1550	135	2210	116	120	84
560 mm (2 wired LED modules per holder)													
				P_{el} = 10.2 W $U_{typ.}$ = 29.4 V	P_{el} = 15.4 W $U_{typ.}$ = 30.8 V	P_{el} = 23 W $U_{typ.}$ = 32.8 V	P_{el} = 38.2 W $U_{typ.}$ = 36.4 V						
DML059C27EC	2x45	warm white	2700	1450	142	2060	142	2800	122	4000	105	120	82
DML059C30EC	2x45	warm white	3000	1510	148	2150	148	2920	127	4160	109	120	82
DML059C40EC	2x45	neutral white	4000	1600	157	2290	157	3100	135	4420	116	120	84

* Production tolerance of luminous flux, efficiency, voltage and power consumption: $\pm 10\%$

Reference numbers – Module length: 280 mm

Fixing	For tape fixing - type: 89300			For screw fixing - type: 89301			For clip fixing - type: 89302	
	Without	Clear	Diffuse	Without	Clear	Diffuse	Clear	Diffuse
DML059C27EC	558667	558670	558673	558676	558679	558682	558685	558688
DML059C30EC	558668	558671	558674	558677	558680	558683	558686	558689
DML059C40EC	558669	558672	558675	558678	558681	558684	558687	558690

Reference numbers – Module length: 560 mm (2 wired LED modules per holder)

Fixing	For tape fixing - type: 89350			For screw fixing - type: 89351			For clip fixing - type: 89352	
	Without	Clear	Diffuse	Without	Clear	Diffuse	Clear	Diffuse
DML059C27EC	558691	558694	558697	558700	558703	558706	558709	558712
DML059C30EC	558692	558695	558698	558701	558704	558707	558710	558713
DML059C40EC	558693	558696	558699	558702	558705	558708	558711	558714

LED Line Fix LUGA 2015 – 280 mm

Technical notes LED Line Fix holder

Holder material: thermo-conductive resin
Lead exit: lateral or base wiring
When joining linear modules in a row, a minimum clearance of 1 mm between the fixing units must be observed due to thermal expansion.
The LED modules of versions with a cover are already fully wired. Additional connectors must be ordered separately for versions without a cover.

LED Line Fix LUGA for tape fixing

Without cover
Dimensions (LxWxH): 280 x 23.2 x 4.5 mm
With base thermal tapes pre-assembled
Weight: 43 g, packaging unit: 4 pcs.
Type: 89300, drawing A

With cover
Degree of protection: IP40
Dimensions (LxWxH): 284 x 23.2 x 16.1 mm
With base thermal tapes pre-assembled
Weight: 67 g, packaging unit: 4 pcs.
Type: 89300, drawing B

LED Line Fix LUGA for screw fixing

Without cover
Dimensions (LxWxH): 280 x 40 x 4.5 mm
Fixing holes for screws M4
Tightening torque: 0.6-0.7 Nm
Weight: 43 g, packaging unit: 4 pcs.
Type: 89301, drawing C


With cover
Degree of protection: IP40
Dimensions (LxWxH): 284 x 40 x 16.1 mm
Fixing holes for screws M4
Tightening torque: 0.6-0.7 Nm
Weight: 67 g, packaging unit: 4 pcs.
Type: 89301, drawing D

LED Line Fix LUGA for clip fixing


With cover
Degree of protection: IP40
Dimensions (LxWxH): 284 x 23.2 x 16.1 mm
Base fixing clips for wall thickness 0.4-1 mm
With base thermal tapes pre-assembled
Weight: 67 g, packaging unit: 4 pcs.
Type: 89302, drawing E




A – For tape fixing - type 89300 - LED Line Fix LUGA 2015 - 280

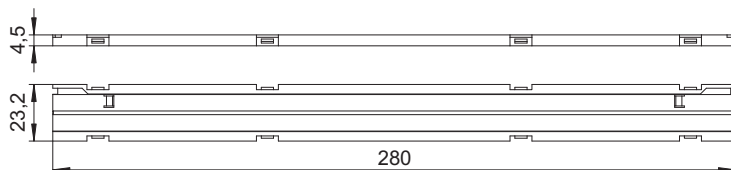


B – For tape fixing - type 89300 - LED Line Fix LUGA 2015 - 280

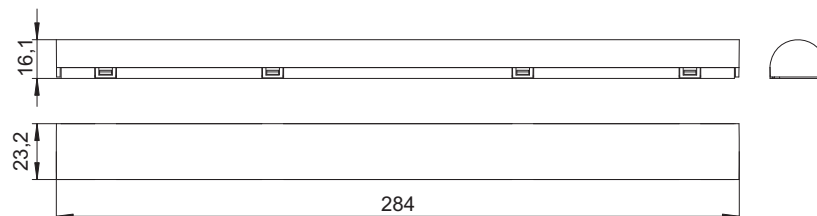


C – For screw fixing - type 89301 - LED Line Fix LUGA 2015 - 280

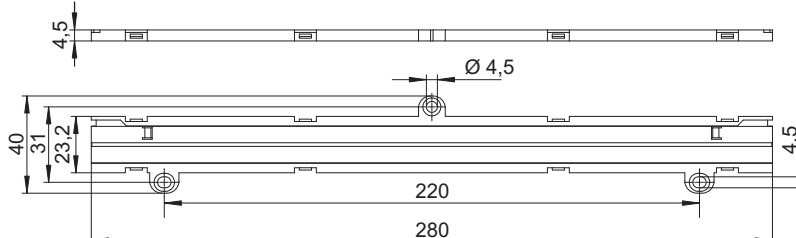

D – For screw fixing - type 89301 - LED Line Fix LUGA 2015 - 280

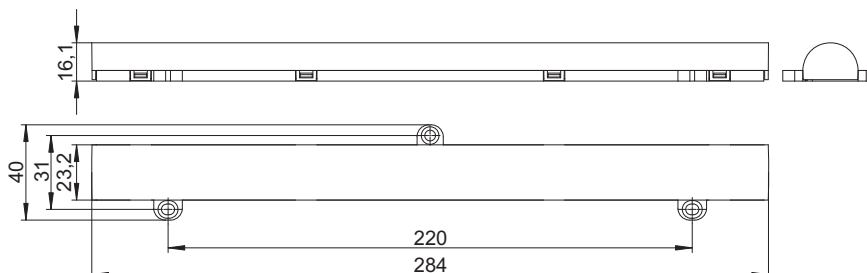

E – For clip fixing - type 89302 - LED Line Fix LUGA 2015 - 280

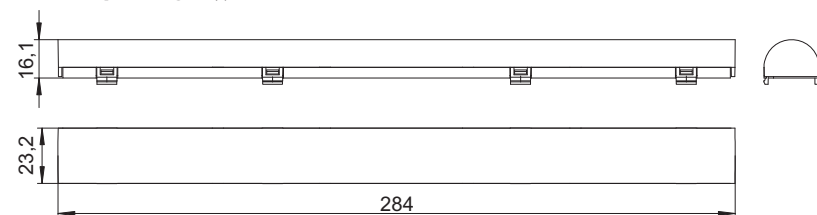

1

2

3

4

5

6

7

8

9

10

11

12

LED Line Fix LUGA 2015 – 560 mm

Technical notes LED Line Fix holder

Holder material: thermo-conductive resin
Lead exit: lateral or base wiring
When joining linear modules in a row, a minimum clearance of 1 mm between the fixing units must be observed due to thermal expansion.
The LED modules of versions with a cover are already fully wired. Additional connectors must be ordered separately for versions without a cover.

LED Line Fix LUGA for tape fixing

Without cover
Dimensions (LxWxH): 561x 23.2 x 4.5 mm
With base thermal tapes pre-assembled
Weight: 86 g, packaging unit: 4 pcs.
Type: 89350, drawing F

With cover
Degree of protection: IP40
Dimensions (LxWxH): 565 x 23.2 x 16.1 mm
With base thermal tapes pre-assembled
Weight: 135 g, unit: 4 pcs.
Type: 89350, drawing G

LED Line Fix LUGA for screw fixing

Without cover
Dimensions (LxWxH): 561x 40 x 4.5 mm
Fixing holes for screws M4
Tightening torque: 0.6-0.7 Nm
Weight: 86 g, packaging unit: 4 pcs.
Type: 89351, drawing H


With cover
Degree of protection: IP40
Dimensions (LxWxH): 565 x 40 x 16.1 mm
Fixing holes for screws M4
Tightening torque: 0.6-0.7 Nm
Weight: 135 g, packaging unit: 4 pcs.
Type: 89351, drawing J

LED Line Fix LUGA for clip fixing


With cover
Degree of protection: IP40
Dimensions (LxWxH): 565 x 23.2 x 16.1 mm
Base fixing clips for wall thickness 0.4-1 mm
With base thermal tapes pre-assembled
Weight: 135 g, packaging unit: 4 pcs.
Type: 89352, drawing K




F – For tape fixing - type 89350 - LED Line Fix LUGA 2015 - 560

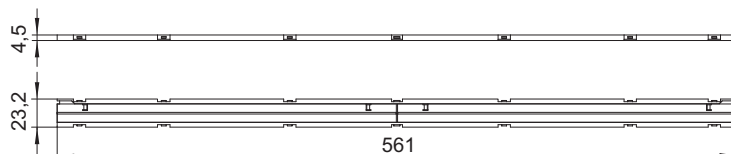


G – For tape fixing - type 89350 - LED Line Fix LUGA 2015 - 560

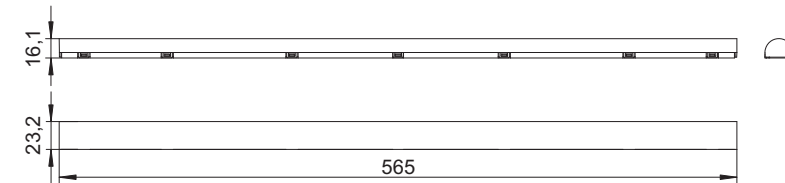


H – For screw fixing - type 89351 - LED Line Fix LUGA 2015 - 560

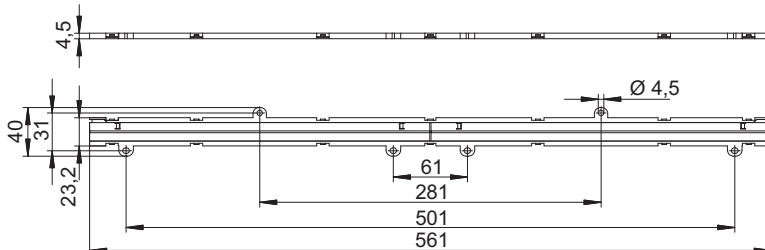

J – For screw fixing - type 89351 - LED Line Fix LUGA 2015 - 560

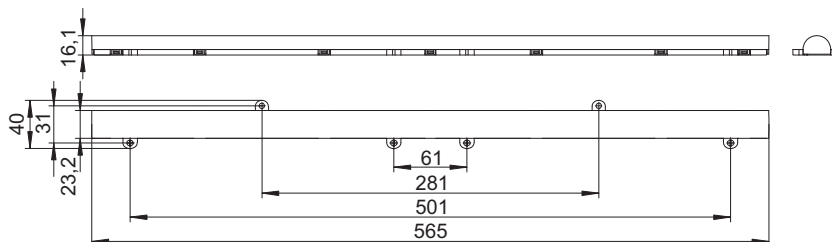

K – For clip fixing - type 89352 - LED Line Fix LUGA 2015 - 560

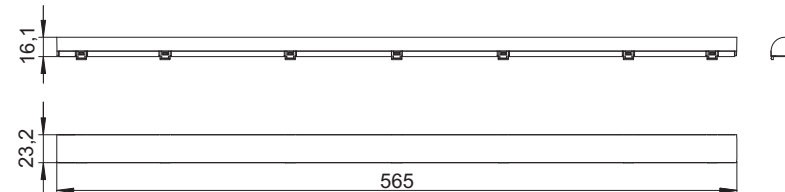

Covers

Technical notes LED Line Fix cover

Material: PC, clear or diffuse

Efficiency covers: clear 97%, diffuse 90%

Covers for LED Line Fix for tape and screw fixing

For type: 89300/89301, LED Line Fix 280 mm

Ref. No.: 549585 clear

Ref. No.: 549586 diffuse

For type: 89350/89351, LED Line Fix 560 mm

Ref. No.: 550912 clear

Ref. No.: 550913 diffuse

Covers for LED Line Fix for clip fixing

Longer fixing clips of cover for fixing the holder into the luminaire sheet

For wall thickness 0.4 - 1 mm

For type: 89302, LED Line Fix 280 mm

Ref. No.: 549994 clear

Ref. No.: 549995 diffuse

For type: 89352, LED Line Fix 560 mm


Ref. No.: 550914 clear

Ref. No.: 550915 diffuse




Luminaire cut-outs for clip fixing

For type 89302 - LED Line Fix 280 mm

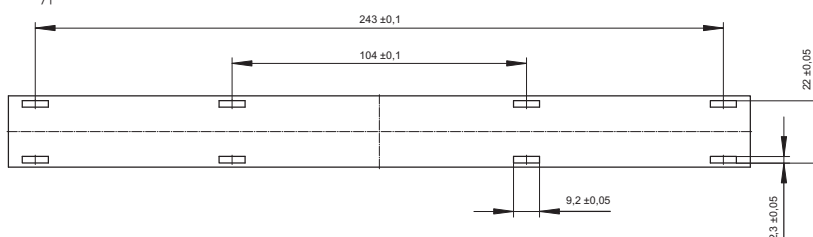

For type 89352 - LED Line Fix 560 mm

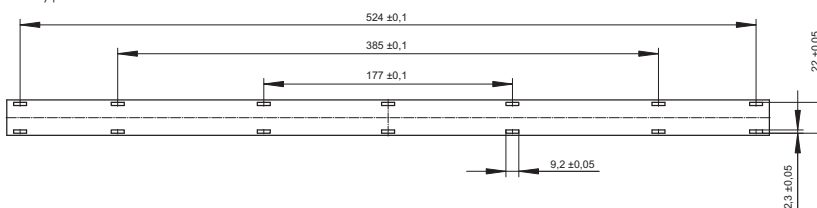

Connectors

You will find connectors for the LED Line Fix LUGA on page 13.

1

2

3

4

5

6

7

8

9

10

11

12

LED Line Fix SMD

Lighting modules with holder and cover

LED Line Fix SMD consists of an energy-efficient linear SMD module, a holder with various attachment options and a cover. The module was designed for integration into indoor luminaires providing direct or indirect light.

The fast, safe and flexible adhesive-based, click on (ZHAGA-compliant L28/L56W4) hole spacing) or screw-based options for fixing the module within the luminaire constitute an ideal solution for linear lighting applications.

The light module forms a single unit consisting of a holder made of a thermoconductive polymer plus a clear or diffuse cover that protects the LED module and electrically isolates it from the luminaire.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Electrical characteristics

at $t_p = 50^\circ\text{C}$

The specified values apply only to the version of the LED module without a cover.

The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)



Technical notes SMD Line modules

On-board push-in terminals: 0.34 mm^2 , for solid leads

Allowed operating temperature at t_c point:

-20 to 75°C

Use of external LED constant-current drivers

Efficiency up to 166 lm/W

Colour rendering index R_G : min. 80


Colour accuracy initially: 3 SDCM

Lumen maintenance L80/B10:


$> 60,000$ hrs. (If 700 mA , $t_p = 50^\circ\text{C}$)

Typical applications


- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps



Without cover



With clear cover



With diffuse cover

Type	Ref. No.	Number of LEDs pcs	Colour	Correlated colour temperature K	Luminous flux* and typ. efficiency, typ. voltage ($U_{typ.}$) and power consumption (P_{el})									Beam angle $^\circ$	CRI	
					350 mA			500 mA			700 mA				min.	typ.
					min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	R_G	R_G	
280 mm					$P_{el} = 4.9\text{ W}$ $U_{typ.} = 14.1\text{ V}$			$P_{el} = 7.3\text{ W}$ $U_{typ.} = 14.5\text{ V}$			$P_{el} = 10.7\text{ W}$ $U_{typ.} = 15.3\text{ V}$					
WU-M-499-830	556538	30	warm white	3000	680	745	152	925	1015	139	1250	1375	129	120	80	85
WU-M-499-840	556539	30	neutral white	4000	680	815	166	925	1105	151	1250	1495	140	120	80	85
560 mm					$P_{el} = 9.9\text{ W}$ $U_{typ.} = 28.2\text{ V}$			$P_{el} = 14.5\text{ W}$ $U_{typ.} = 29\text{ V}$			$P_{el} = 21.4\text{ W}$ $U_{typ.} = 30.5\text{ V}$					
WU-M-500-830	556540	60	warm white	3000	1360	1495	151	1850	2030	140	2500	2745	128	120	80	85
WU-M-500-840	556541	60	neutral white	4000	1360	1630	165	1850	2210	152	2500	2990	140	120	80	85

* Measurement tolerance of luminous flux: $\pm 7\%$

Reference numbers – Module length: 280 mm

Fixing	For tape fixing - type: 89500			For screw fixing - type: 89501			For clip fixing - type: 89502	
	Without	Clear	Diffuse	Without	Clear	Diffuse	Clear	Diffuse
SMD56/30/280	557460	557462	557464	557466	557468	557470	557472	557474
SMD56/40/280	557461	557463	557465	557467	557469	557471	557473	557475

Reference numbers – Module length: 560 mm

Fixing	For tape fixing - type: 89550			For screw fixing - type: 89551			For clip fixing - type: 89552	
	Without	Clear	Diffuse	Without	Clear	Diffuse	Clear	Diffuse
SMD56/30/560	557394	557396	557398	557400	557402	557404	557406	557408
SMD56/40/560	557395	557397	557399	557401	557403	557405	557407	557409

LED Line Fix SMD

Technical notes LED Line Fix holder

Holder material: thermo-conductive resin
 When joining linear modules in a row, a minimum clearance of 1 mm between the fixing units must be observed due to thermal expansion.



LED Line Fix SMD for tape fixing


With base thermal tapes pre-assembled
 Weight: 95/142 g, packaging unit: 4 pcs.
 Type: 89500/89550

Module length mm	Drawing	Degree of protection	Dimensions (LxWxH) mm
Without cover			
280	A	–	280x23.2x4.5
560	C	–	561x23.2x4.5
With cover			
280	B	IP20	284x23.2x16.1
560	D	IP20	565x23.2x16.1

LED Line Fix SMD – For tape fixing


A – Type 89500 – 280 mm

Without cover




B – Type 89500 – 280 mm

With cover




C – Type 89550 – 560 mm

Without cover



D – Type 89550 – 560 mm

With cover



LED Line Fix SMD for screw fixing


Fixing holes for screws M4
 Tightening torque: 0.6-0.7 Nm
 Weight: 96/143 g, packaging unit: 4 pcs.
 Type: 89501/89551

Module length mm	Drawing	Degree of protection	Dimensions (LxWxH) mm
Without cover			
280	E	–	280x40x4.5
560	G	–	561x40x4.5
With cover			
280	F	IP20	284x40x16.1
560	H	IP20	565x40x16.1

LED Line Fix SMD – For screw fixing


E – Type 89501 – 280 mm

Without cover




F – Type 89501 – 280 mm

With cover




G – Type 89551 – 560 mm

Without cover

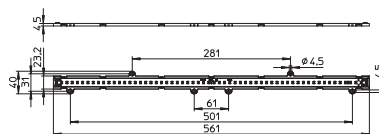

H – Type 89551 – 560 mm

With cover

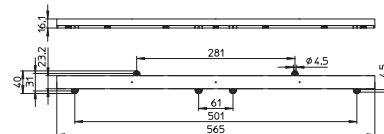

LED Line Fix SMD for clip fixing


With base thermal tapes pre-assembled
 Base fixing clips for wall thickness 0.4-1 mm
 Weight: 95/142 g, packaging unit: 4 pcs.
 Type: 89502/89552

Module length mm	Drawing	Degree of protection	Dimensions (LxWxH) mm
With cover			
280	K	IP20	284x23.2x16.1
560	L	IP20	565x23.2x16.1

LED Line Fix SMD – For clip fixing


K – Type 89502 – 280 mm

With cover



L – Type 89552 – 560 mm

With cover



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

LED Line Fix SMD

Technical notes LED Line Fix cover

Material: PC, clear or diffuse

Lead exit: lateral push-in holes

Efficiency covers: clear 97%, diffuse 90%



Covers for LED Line Fix 280 mm for tape and screw fixing

For type: 89500/89501

Ref. No.: 554044 clear

Ref. No.: 554045 diffuse

For clip fixing

Longer fixing clips of cover for fixing the holder into the luminaire sheet

For wall thickness 0.4-1 mm


For type: 89502

Ref. No.: 554046 clear

Ref. No.: 554047 diffuse

Luminaire cut-outs for clip fixing

For type 89502 – LED Line Fix 280 mm

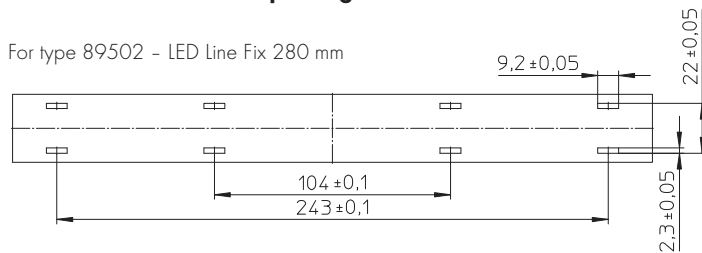

Covers for LED Line Fix for tape and screw fixing

For type: 89550/89551

Ref. No.: 551588 clear

Ref. No.: 551589 diffuse

For clip fixing

Longer fixing clips of cover for fixing the holder into the luminaire sheet

For wall thickness 0.4-1 mm


For type: 89552

Ref. No.: 551590 clear

Ref. No.: 551591 diffuse

Luminaire cut-outs for clip fixing

For type 89552 – LED Line Fix 560 mm

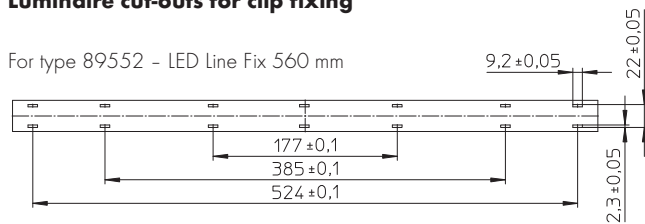

LED Line AluFix LUGA 2015

Lighting modules with holder and cover

LED Line AluFix LUGA consists of an energy-efficient linear COB module, an aluminium holder and a clear cover or, alternatively, optics. The module was designed for integration into indoor luminaires providing direct or indirect light.

The light module is available with up to five pre-wired LUGA modules in lengths of 305 to 1429 mm.

The robust aluminium holder serves to optimise thermal management and is easy to attach using M3 screws. The clear or diffuse cover protects LED modules from environmental factors.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Enabling the kind of light distribution typically required in offices or shops, the optics versions facilitate luminaire designs that can do without an additional light guidance system. The high-quality optics consist of only one unit, regardless of its length, and therefore provide optimal protection for LED modules and ensure homogeneously illuminated surfaces without optical interruptions.

Technical notes

For one to five LUGA Line modules

On-board push terminal system: Electrical connection with lateral connection leads 28AWG

Allowed operating temperature at t_c point:
-40 to 85 °C

Use of external LED constant-current drivers:
for drivers with $U_{OUT} < 150$ V DC

Efficiency up to 157 lm/W

Colour rendering index R_a : > 80

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L90/B10:

55,000 hrs. (I_f 700 mA)

Typical applications

- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps



Further shapes and optics on request.

1

2

3

4

5

6

7

8

9

10

11

12

LED Line AluFix LUGA 2015

Optical characteristics of LUGA Line LED modules

at $t_p = 65\text{ °C}$ | The following efficiency levels can be achieved when using a cover: see data sheets


Type	Number of LEDs pcs.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})*							
				350 mA		500 mA		700 mA		1050 mA	
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
305 mm				$P_{el} = 5.1\text{ W}$ $U_{typ.} = 14.7\text{ V}$		$P_{el} = 7.7\text{ W}$ $U_{typ.} = 15.4\text{ V}$		$P_{el} = 11.5\text{ W}$ $U_{typ.} = 16.4\text{ V}$		$P_{el} = 19.1\text{ W}$ $U_{typ.} = 18.2\text{ V}$	
DML059C27EC	45	warm white	2700	725	142	1030	134	1400	122	2000	105
DML059C30EC	45	warm white	3000	755	148	1075	140	1460	127	2080	109
DML059C40EC	45	neutral white	4000	800	157	1145	149	1550	135	2210	116
586 mm (2 wired LED modules per aluminium profile)				$P_{el} = 10.2\text{ W}$ $U_{typ.} = 29.4\text{ V}$		$P_{el} = 15.4\text{ W}$ $U_{typ.} = 30.8\text{ V}$		$P_{el} = 23\text{ W}$ $U_{typ.} = 32.8\text{ V}$		$P_{el} = 38.2\text{ W}$ $U_{typ.} = 36.4\text{ V}$	
DML059C27EC	2x45	warm white	2700	1450	142	2060	134	2800	122	4000	105
DML059C30EC	2x45	warm white	3000	1510	148	2150	140	2920	127	4160	109
DML059C40EC	2x45	neutral white	4000	1600	157	2290	149	3100	135	4420	116
867 mm (3 wired LED modules per aluminium profile)				$P_{el} = 15.3\text{ W}$ $U_{typ.} = 44.1\text{ V}$		$P_{el} = 23.1\text{ W}$ $U_{typ.} = 46.2\text{ V}$		$P_{el} = 34.5\text{ W}$ $U_{typ.} = 49.2\text{ V}$		$P_{el} = 57.3\text{ W}$ $U_{typ.} = 54.6\text{ V}$	
DML059C27EC	3x45	warm white	2700	2175	142	3090	134	4200	122	6000	105
DML059C30EC	3x45	warm white	3000	2265	148	3225	140	4380	127	6240	109
DML059C40EC	3x45	neutral white	4000	2400	157	3435	149	4650	135	6630	116
1148 mm (4 wired LED modules per aluminium profile)				$P_{el} = 20.4\text{ W}$ $U_{typ.} = 58.8\text{ V}$		$P_{el} = 30.8\text{ W}$ $U_{typ.} = 61.6\text{ V}$		$P_{el} = 46\text{ W}$ $U_{typ.} = 65.6\text{ V}$		$P_{el} = 76.4\text{ W}$ $U_{typ.} = 72.8\text{ V}$	
DML059C27EC	4x45	warm white	2700	2900	142	4120	134	5600	122	8000	105
DML059C30EC	4x45	warm white	3000	3020	148	4300	140	5840	127	8320	109
DML059C40EC	4x45	neutral white	4000	3200	157	4580	149	6200	135	8840	116
1429 mm (5 wired LED modules per aluminium profile)				$P_{el} = 25.5\text{ W}$ $U_{typ.} = 73.5\text{ V}$		$P_{el} = 38.5\text{ W}$ $U_{typ.} = 77\text{ V}$		$P_{el} = 57.5\text{ W}$ $U_{typ.} = 82\text{ V}$		$P_{el} = 95.5\text{ W}$ $U_{typ.} = 91\text{ V}$	
DML059C27EC	5x45	warm white	2700	3625	142	5150	134	7000	122	10000	105
DML059C30EC	5x45	warm white	3000	3775	148	5375	140	7300	127	10400	109
DML059C40EC	5x45	neutral white	4000	4000	157	5725	149	7750	135	11050	116

* Production tolerance of luminous flux, efficiency, voltage and power consumption: $\pm 10\%$

LED Line AluFix LUGA 2015


Technical notes

Material: Aluminium profile and PMMA cover
 Rear connection leads, lead length: 70 mm
 with 2-poles connector AMP Micro Mate-N-LOK 1445049-2
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

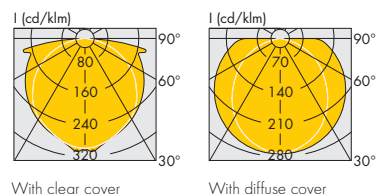

LED Line AluFix LUGA 2015 – Cover

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89001	305	36.2	21.3	15	171
89002	586	36.2	21.3	15	330
89003	867	36.2	21.3	15	495
89004	1148	36.2	21.3	15	650
89005	1429	36.2	21.3	15	815

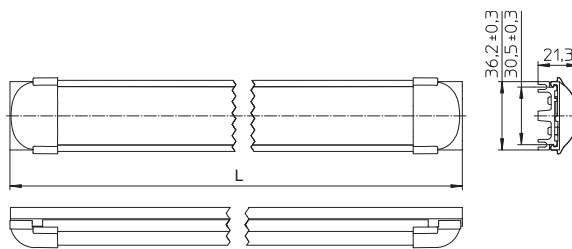


Reference numbers – LED Line AluFix LUGA 2015 – Cover

The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)

Type / Total length	89001 / 305 mm		89002 / 586 mm		89003 / 867 mm		89004 / 1148 mm		89005 / 1429 mm	
	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse
DML059C27EC	558491	558494	558497	558500	558503	558506	558509	558512	558515	558518
DML059C30EC	558492	558495	558498	558501	558504	558507	558510	558513	558516	558519
DML059C40EC	558493	558496	558499	558502	558505	558508	558511	558514	558517	558520

LED Line AluFix LUGA 2015 – Optics Office

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89011	305	36.2	15.2	15	165
89012	586	36.2	15.2	15	316
89013	867	36.2	15.2	15	466
89014	1148	36.2	15.2	15	617
89015	1429	36.2	15.2	15	767

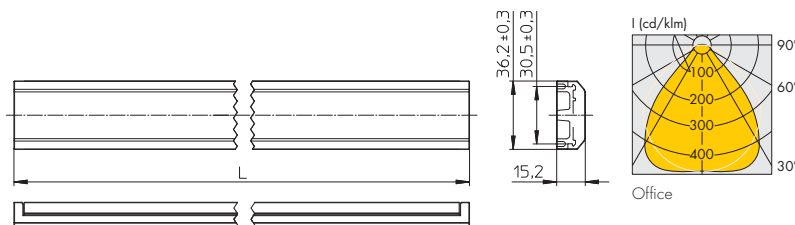

Reference numbers – LED Line AluFix LUGA 2015 – Optics Office

Efficiency optics: 94%

Type / Total length	89011 / 305 mm	89012 / 586 mm	89013 / 867 mm	89014 / 1148 mm	89015 / 1429 mm
DML059C27EC	558521	558524	558527	558530	558533
DML059C30EC	558522	558525	558528	558531	558534
DML059C40EC	558523	558526	558529	558532	558535


LED Line AluFix LUGA 2015

Technical notes

Material: Aluminium profile and PMMA cover
 Rear connection leads, lead length: 70 mm
 with 2-poles connector AMP Micro Mate-N-LOK 1445049-2
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

LED Line AluFix LUGA 2015 – Optics Retail 1-SYM

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89021	305	36.2	15.2	15	165
89022	586	36.2	15.2	15	316
89023	867	36.2	15.2	15	466
89024	1148	36.2	15.2	15	617
89025	1429	36.2	15.2	15	767

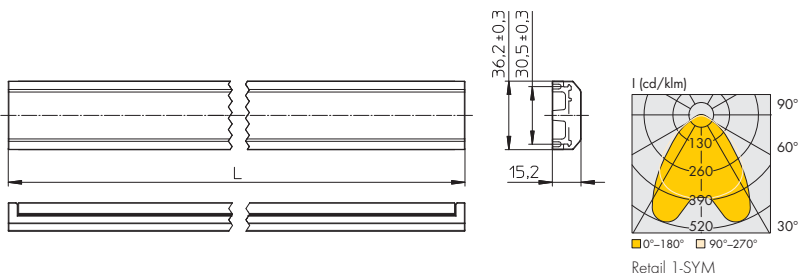


Reference numbers – LED Line AluFix LUGA 2015 – Optics Retail 1-SYM

Efficiency optics: 94%

Type / Total length	89021 / 305 mm	89022 / 586 mm	89023 / 867 mm	89024 / 1148 mm	89025 / 1429 mm
DML059C27EC	558628	558631	558634	558637	558640
DML059C30EC	558629	558632	558635	558638	558641
DML059C40EC	558630	558633	558636	558639	558642

LED Line AluFix LUGA 2015 – Optics Retail 1-ASYM

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89031	305	36.2	15.2	15	165
89032	586	36.2	15.2	15	316
89033	867	36.2	15.2	15	466
89034	1148	36.2	15.2	15	617
89035	1429	36.2	15.2	15	767

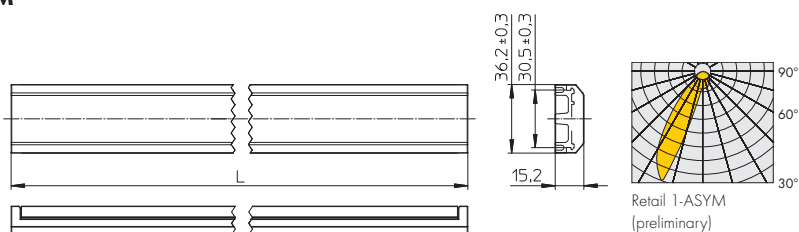

Reference numbers – LED Line AluFix LUGA 2015 – Optics Retail 1-ASYM


Efficiency optics: 94%

Type / Total length	89031 / 305 mm	89032 / 586 mm	89033 / 867 mm	89034 / 1148 mm	89035 / 1429 mm
DML059C27EC	558644	558647	558650	558653	558656
DML059C30EC	558645	558648	558651	558654	558657
DML059C40EC	558646	558649	558652	558655	558658

Connection leads

2-poles, ferrule on bare end of cores and AMP Micro Mate-N-LOK 1445022-2

Ref. No.	Lead length L					
	100 mm	200 mm	300 mm	400 mm	500 mm	600 mm
	554285	554286	554287	554288	554289	554290

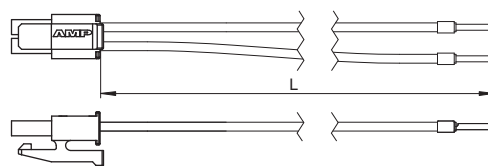

LED Line AluFix LUGA RX

Lighting modules with holder and cover

LED Line AluFix LUGA RX consists of an energy-efficient linear COB module, an aluminium holder and a clear cover or, alternatively, optics. The module was designed for integration into indoor luminaires providing direct or indirect light.

The light module is available with up to five pre-wired LUGA RX modules in lengths of 305 to 1429 mm.

The robust aluminium holder serves to optimise thermal management and is easy to attach using M3 screws. The clear or diffuse cover protects LED modules from environmental factors.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Enabling the kind of light distribution typically required in offices or shops, the optics versions facilitate luminaire designs that can do without an additional light guidance system. The high-quality optics consist of only one unit, regardless of its length, and therefore provide optimal protection for LED modules and ensure homogeneously illuminated surfaces without optical interruptions.

Technical notes

For one to five LUGA Line RX modules

On-board push terminal system: Electrical connection with lateral connection leads 28AWG

Allowed operating temperature at t_c point:
-40 to 85 °C

Use of external LED constant-current drivers:
for drivers with $U_{OUT} < 150$ V DC

Efficiency up to 146 lm/W

Colour rendering index R_a : > 80

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L80/B10:
55,000 hrs. (I_f 700 mA)

Typical applications

- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps



Further shapes and optics on request.

1

2

3

4

5

6

7

8

9

10

11

12

LED Line AluFix LUGA RX

Optical characteristics of LUGA Line RX LED modules

at $t_p = 65^\circ\text{C}$ | The following efficiency levels can be achieved when using a cover: see data sheet


Type	Number of LEDs pcs.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})*							
				350 mA		500 mA		700 mA		1050 mA	
				I_m	l_m/W	I_m	l_m/W	I_m	l_m/W	I_m	l_m/W
305 mm				$P_{el} = 5.9\text{ W}$ $U_{typ.} = 16.9\text{ V}$		$P_{el} = 8.6\text{ W}$ $U_{typ.} = 17.2\text{ V}$		$P_{el} = 12.3\text{ W}$ $U_{typ.} = 17.6\text{ V}$		$P_{el} = 19\text{ W}$ $U_{typ.} = 18.1\text{ V}$	
DML068C27FR	48	warm white	2700	780	132	1075	125	1435	117	1980	104
DML068C30FR	48	warm white	3000	810	137	1115	130	1490	121	2055	108
DML068C40FR	48	neutral white	4000	860	146	1185	138	1585	129	2185	115
586 mm (2 wired LED modules per aluminium profile)				$P_{el} = 11.8\text{ W}$ $U_{typ.} = 33.8\text{ V}$		$P_{el} = 17.2\text{ W}$ $U_{typ.} = 34.4\text{ V}$		$P_{el} = 24.6\text{ W}$ $U_{typ.} = 35.2\text{ V}$		$P_{el} = 38\text{ W}$ $U_{typ.} = 36.2\text{ V}$	
DML068C27FR	2x48	warm white	2700	1560	132	2150	125	2870	117	3960	104
DML068C30FR	2x48	warm white	3000	1620	137	2230	130	2980	121	4110	108
DML068C40FR	2x48	neutral white	4000	1720	146	2370	138	3170	129	4370	115
867 mm (3 wired LED modules per aluminium profile)				$P_{el} = 17.7\text{ W}$ $U_{typ.} = 50.7\text{ V}$		$P_{el} = 25.8\text{ W}$ $U_{typ.} = 51.6\text{ V}$		$P_{el} = 36.9\text{ W}$ $U_{typ.} = 52.8\text{ V}$		$P_{el} = 57\text{ W}$ $U_{typ.} = 54.3\text{ V}$	
DML068C27FR	3x48	warm white	2700	2340	132	3225	125	4305	117	5940	104
DML068C30FR	3x48	warm white	3000	2430	137	3345	130	4470	121	6165	108
DML068C40FR	3x48	neutral white	4000	2580	146	3555	138	4755	129	6555	115
1148 mm (4 wired LED modules per aluminium profile)				$P_{el} = 23.6\text{ W}$ $U_{typ.} = 67.6\text{ V}$		$P_{el} = 34.4\text{ W}$ $U_{typ.} = 68.8\text{ V}$		$P_{el} = 49.2\text{ W}$ $U_{typ.} = 70.4\text{ V}$		$P_{el} = 76\text{ W}$ $U_{typ.} = 72.4\text{ V}$	
DML068C27FR	4x48	warm white	2700	3120	132	4300	125	5740	117	7920	104
DML068C30FR	4x48	warm white	3000	3240	137	4460	130	5960	121	8220	108
DML068C40FR	4x48	neutral white	4000	3440	146	4740	138	6340	129	8740	115
1429 mm (5 wired LED modules per aluminium profile)				$P_{el} = 29.5\text{ W}$ $U_{typ.} = 84.5\text{ V}$		$P_{el} = 43\text{ W}$ $U_{typ.} = 86.2\text{ V}$		$P_{el} = 61.5\text{ W}$ $U_{typ.} = 88\text{ V}$		$P_{el} = 95\text{ W}$ $U_{typ.} = 90.5\text{ V}$	
DML068C27FR	5x48	warm white	2700	3900	132	5375	125	7175	117	9900	104
DML068C30FR	5x48	warm white	3000	4050	137	5575	130	7450	121	10275	108
DML068C40FR	5x48	neutral white	4000	4300	146	5925	138	7925	129	10925	115

* Production tolerance of luminous flux, efficiency, voltage and power consumption: $\pm 10\%$

LED Line AluFix LUGA RX


Technical notes

Material: Aluminium profile and PMMA cover
 Rear connection leads, lead length: 70 mm
 with 2-poles connector AMP Micro Mate-N-LOK 1445049-2
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

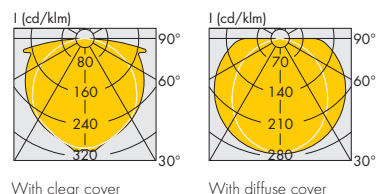

LED Line AluFix LUGA RX – Cover

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89001	305	36.2	21.3	15	171
89002	586	36.2	21.3	15	330
89003	867	36.2	21.3	15	495
89004	1148	36.2	21.3	15	650
89005	1429	36.2	21.3	15	815

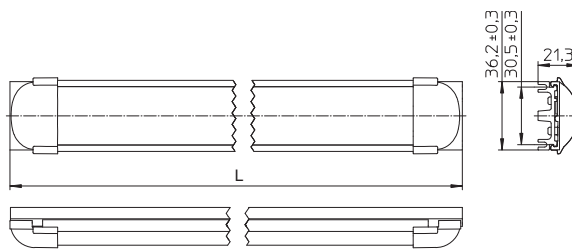


Reference numbers – LED Line AluFix LUGA RX – Cover

The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)

Type / Total length	89001 / 305 mm		89002 / 586 mm		89003 / 867 mm		89004 / 1148 mm		89005 / 1429 mm	
	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse
DML068C27FR	561391	561400	561409	561418	561427	561436	561445	561454	561463	561472
DML068C30FR	561392	561401	561410	561419	561428	561437	561446	561455	561464	561473
DML068C40FR	561395	561404	561413	561422	561431	561440	561449	561458	561467	561476

LED Line AluFix LUGA RX – Optics Office

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89011	305	36.2	15.2	15	165
89012	586	36.2	15.2	15	316
89013	867	36.2	15.2	15	466
89014	1148	36.2	15.2	15	617
89015	1429	36.2	15.2	15	767

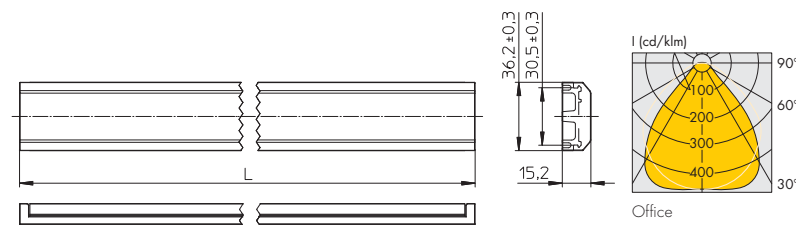

Reference numbers – LED Line AluFix LUGA RX – Optics Office

Efficiency optics: 94%

Type / Total length	89011 / 305 mm	89012 / 586 mm	89013 / 867 mm	89014 / 1148 mm	89015 / 1429 mm
DML068C27FR	561481	561490	561499	561508	561517
DML068C30FR	561482	561491	561500	561509	561518
DML068C40FR	561485	561494	561503	561512	561521


LEDLine AluFix LUGA RX

Technical notes

Material: Aluminium profile and PMMA cover
 Rear connection leads, lead length: 70 mm
 with 2-poles connector AMP Micro Mate-N-LOK 1445049-2
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

LED Line AluFix LUGA RX – Optics Retail 1-SYM

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89021	305	36.2	15.2	15	165
89022	586	36.2	15.2	15	316
89023	867	36.2	15.2	15	466
89024	1148	36.2	15.2	15	617
89025	1429	36.2	15.2	15	767

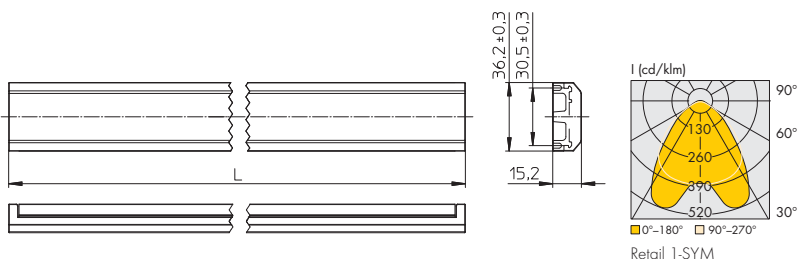


Reference numbers – LEDLine AluFix LUGA RX – Optics Retail 1-SYM

Efficiency optics: 94%

Type / Total length	89021 / 305 mm	89022 / 586 mm	89023 / 867 mm	89024 / 1148 mm	89025 / 1429 mm
DML068C27FR	561526	561535	561544	561553	561562
DML068C30FR	561527	561536	561545	561554	561563
DML068C40FR	561530	561539	561548	561557	561566

LED Line AluFix LUGA RX – Optics Retail 1-ASYM

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89031	305	36.2	15.2	15	165
89032	586	36.2	15.2	15	316
89033	867	36.2	15.2	15	466
89034	1148	36.2	15.2	15	617
89035	1429	36.2	15.2	15	767

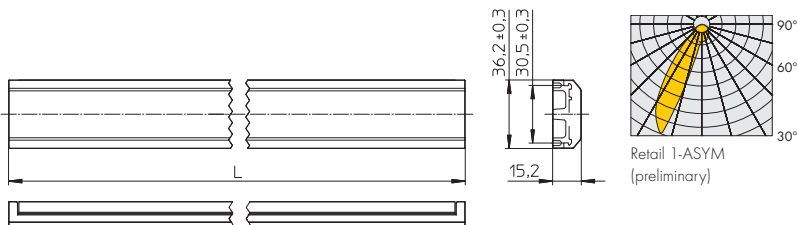

Reference numbers – LEDLine AluFix LUGA RX – Optics Retail 1-ASYM


Efficiency optics: 94%

Type / Total length	89031 / 305 mm	89032 / 586 mm	89033 / 867 mm	89034 / 1148 mm	89035 / 1429 mm
DML068C27FR	561571	562287	562296	562305	562314
DML068C30FR	561572	562288	562297	562306	562315
DML068C40FR	561575	562291	562300	562309	562318

Connection leads

2-poles, ferrule on bare end of cores and AMP Micro Mate-N-LOK 1445022-2

Ref. No.	Lead length L					
	100 mm	200 mm	300 mm	400 mm	500 mm	600 mm
	554285	554286	554287	554288	554289	554290

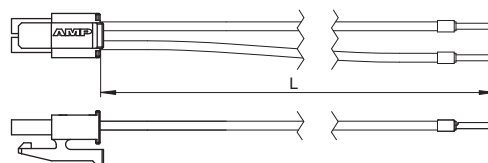

LED Line AluFix SMD – Cover

Lighting modules with holder and cover

LED Line AluFix SMD consists of an energy-efficient linear SMD module, an aluminium holder and a clear or diffuse cover. The module was designed for integration into indoor luminaires providing direct or indirect light.

The light module is available with up to five pre-wired SMD modules in lengths of 305 to 1429 mm and is thus an ideal component for LED lighting strips.

The robust aluminium holder serves to optimise thermal management and is easy to attach using M3 screws. The clear or diffuse cover protects LED modules from environmental factors.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Typical applications

- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps



Technical notes

Allowed operating temperature at t_c point:
-20 to 75 °C

Use of external LED constant-current drivers:
for driver with $U_{OUT} < 250$ V DC

Efficiency up to 166 lm/W


Colour rendering index R_a : min. 80

Colour accuracy: 3 SDCM

Lumen maintenance L80/B10

> 60,000 hrs. (I_F 700 mA, $t_p = 50$ °C)

Further shapes and optics on request.

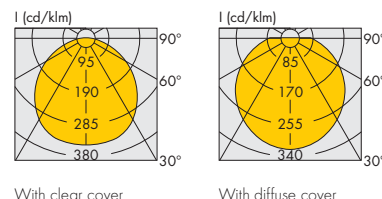

Optical characteristics

at $t_p = 50$ °C | The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)


Type	Number of LEDs pcs.	Colour	Correlated colour temperature K	Typ. luminous flux* and efficiency, typ. voltage (U_{typ}) and power consumption (P_{el}) 350 mA					
				500 mA		700 mA			
				lm	lm/W	lm	lm/W	lm	lm/W
305 mm (1 SMD module 280 mm)				$P_{el} = 4.9$ W $U_{typ.} = 14.1$ V		$P_{el} = 7.3$ W $U_{typ.} = 14.5$ V		$P_{el} = 10.7$ W $U_{typ.} = 15.3$ V	
AluFixSMD/305/30	1x30	warm white	3000	745	152	1015	139	1375	129
AluFixSMD/305/40	1x30	neutral white	4000	815	166	1105	151	1495	140
586 mm (1 SMD module 560 mm)				$P_{el} = 9.9$ W $U_{typ.} = 28.2$ V		$P_{el} = 14.5$ W $U_{typ.} = 29$ V		$P_{el} = 21.4$ W $U_{typ.} = 30.5$ V	
AluFixSMD/586/30	2x30	warm white	3000	1495	151	2030	140	2745	128
AluFixSMD/586/40	2x30	neutral white	4000	1630	165	2210	152	2990	140
867 mm (2 wired SMD modules 1x560 mm + 1x280 mm per aluminium profile)				$P_{el} = 14.8$ W $U_{typ.} = 42.3$ V		$P_{el} = 21.8$ W $U_{typ.} = 43.5$ V		$P_{el} = 32.1$ W $U_{typ.} = 45.8$ V	
AluFixSMD/867/30	3x30	warm white	3000	2240	151	3045	140	4120	128
AluFixSMD/867/40	3x30	neutral white	4000	2445	165	3315	152	4485	140
1148 mm (2 wired SMD modules 560 mm per aluminium profile)				$P_{el} = 19.8$ W $U_{typ.} = 56.4$ V		$P_{el} = 29$ W $U_{typ.} = 58$ V		$P_{el} = 42.8$ W $U_{typ.} = 61$ V	
AluFixSMD/1148/30	4x30	warm white	3000	2990	151	4060	140	5490	128
AluFixSMD/1148/40	4x30	neutral white	4000	3260	165	4420	152	5980	140
1429 mm (3 wired SMD modules 2x560 mm + 1x280 mm per aluminium profile)				$P_{el} = 24.7$ W $U_{typ.} = 70.5$ V		$P_{el} = 36.3$ W $U_{typ.} = 72.5$ V		$P_{el} = 53.5$ W $U_{typ.} = 76.3$ V	
AluFixSMD/1429/30	5x30	warm white	3000	3735	151	5075	140	6865	128
AluFixSMD/1429/40	5x30	neutral white	4000	4075	165	5525	152	7475	140

* Measurement tolerance of luminous flux: $\pm 7\%$

LED Line AluFix SMD – Cover

Technical notes LED Line AluFix SMD – Cover

Material: Aluminium profile and PMMA cover
 Rear connection leads: Cu tinned, single-core
 0.32 mm² (AWG22), PVC-insulation, red and black,
 notched lead ends, lead length: L + 80 mm
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

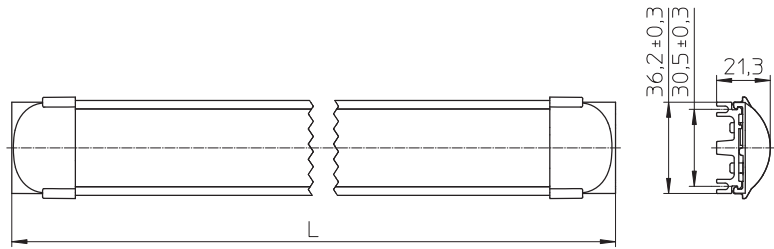

Type	Dimensions (LxWxH) in mm			Packaging unit pcs.	Weight g
	L	W	H		
89001	305	36.2	21.3	15	171
89002	586	36.2	21.3	15	330
89003	867	36.2	21.3	15	495
89004	1148	36.2	21.3	15	650
89005	1429	36.2	21.3	15	815



Reference numbers – LED Line AluFix SMD – Cover

Type / Total length	89001 / 305 mm		89002 / 586 mm		89003 / 867 mm		89004 / 1148 mm		89005 / 1429 mm	
	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse
SMD56/30/280	557856	557820	557858	557822	557860	557824	557862	557826	557864	557828
SMD56/40/280	557857	557821	557859	557823	557861	557825	557863	557827	557865	557829

LED Line AluFix SMD Gen. 2 – Cover

Lighting modules with holder and cover

LED Line AluFix SMD consists of an energy-efficient linear SMD module, an aluminium holder and a clear or diffuse cover. The module was designed for integration into indoor luminaires providing direct or indirect light.

The light module is available with up to five pre-wired SMD modules in lengths of 305 to 1429 mm and is thus an ideal component for LED lighting strips.

The robust aluminium holder serves to optimise thermal management and is easy to attach using M3 screws. The clear or diffuse cover protects LED modules from environmental factors.

The diffuse cover reduces glare and distributes light in a similar manner to a fluorescent lamp.

Typical applications

- Office and school lighting
- Retail lighting
- Industrial lighting
- For replacement of T5 and T8 lamps

Optical characteristics

at $t_p = 50\text{ }^\circ\text{C}$ | The following efficiency levels can be achieved when using a cover: clear (97%), diffuse (90%)

Type	No. of LEDs	Colour	Correlated colour temperature K	Typ. luminous flux* and efficiency, typ. voltage ($U_{typ.}$) and power consumption (P_{el})					
				350 mA		500 mA		700 mA	
				lm	lm/W	lm	lm/W	lm	lm/W
305 mm (1 SMD module 280 mm)				$P_{el} = 4.9\text{ W}$ $U_{typ.} = 13.9\text{ V}$		$P_{el} = 7.2\text{ W}$ $U_{typ.} = 14.4\text{ V}$		$P_{el} = 10.5\text{ W}$ $U_{typ.} = 15\text{ V}$	
ALUFixSMD / 305 / 30	1x30	warm white	3000	780	160	1100	152	1500	143
ALUFixSMD / 305 / 40	1x30	neutral white	4000	820	168	1150	159	1570	150
ALUFixSMD / 305 / 50	1x30	neutral white	5000	890	183	1255	174	1715	164
ALUFixSMD / 305 / 65	1x30	cool white	6500	860	176	1205	168	1650	158
586 mm (1 SMD module 560 mm)				$P_{el} = 9.8\text{ W}$ $U_{typ.} = 27.9\text{ V}$		$P_{el} = 14.4\text{ W}$ $U_{typ.} = 28.8\text{ V}$		$P_{el} = 20.9\text{ W}$ $U_{typ.} = 29.9\text{ V}$	
ALUFixSMD / 586 / 30	1x60	warm white	3000	1565	160	2195	152	3005	143
ALUFixSMD / 586 / 40	1x60	neutral white	4000	1635	168	2295	159	3145	150
ALUFixSMD / 586 / 50	1x60	neutral white	5000	1785	183	2505	174	3430	164
ALUFixSMD / 586 / 65	1x60	cool white	6500	1720	176	2415	168	3300	158
867 mm (2 wired SMD modules 1x280 mm + 1x560 mm per aluminium profile)				$P_{el} = 14.7\text{ W}$ $U_{typ.} = 41.8\text{ V}$		$P_{el} = 21.6\text{ W}$ $U_{typ.} = 43.2\text{ V}$		$P_{el} = 31.4\text{ W}$ $U_{typ.} = 44.9\text{ V}$	
ALUFixSMD / 867 / 30	1x30 + 1x60	warm white	3000	2345	160	3295	152	4505	143
ALUFixSMD / 867 / 40	1x30 + 1x60	neutral white	4000	2455	168	3445	159	4715	150
ALUFixSMD / 867 / 50	1x30 + 1x60	neutral white	5000	2675	183	3760	174	5145	164
ALUFixSMD / 867 / 65	1x30 + 1x60	cool white	6500	2580	176	3620	168	4950	158

* Measurement tolerance of luminous flux: $\pm 7\%$



Technical notes

Allowed operating temperature at t_c point:
-20 to 75 °C

Use of external LED constant-current drivers:
for driver with $U_{OUT} < 250\text{ V DC}$

Efficiency up to 183 lm/W


Colour rendering index R_a : min. 80

Colour accuracy: 3 SDCM

Lumen maintenance L80/B10

> 60,000 hrs. ($I_F 700\text{ mA}$, $t_p = 50\text{ }^\circ\text{C}$)

Further shapes and optics on request.

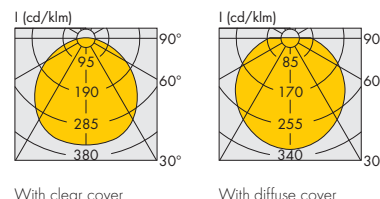

1

2

3

4

5

6

7

8

9

10

11

12

LED Line ALUFix SMD Gen. 2 – Cover

Type	No. of LEDs	Colour	Correlated colour temperature K	Typ. luminous flux* and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})					
				350 mA		500 mA		700 mA	
				lm	lm/W	lm	lm/W	lm	lm/W
1148 mm (2 wired SMD modules 560 mm per aluminium profile)				P _{el} = 19.6 W U _{typ.} = 55.8 V		P _{el} = 28.8 W U _{typ.} = 57.6 V		P _{el} = 41.8 W U _{typ.} = 59.8 V	
ALUFixSMD / 1148 / 30	2x60	warm white	3000	3130	160	4390	152	6010	143
ALUFixSMD / 1148 / 40	2x60	neutral white	4000	3270	168	4590	159	6290	150
ALUFixSMD / 1148 / 50	2x60	neutral white	5000	3570	183	5010	174	6860	164
ALUFixSMD / 1148 / 65	2x60	cool white	6500	3440	176	4830	168	6600	158
1429 mm (3 wired SMD modules 1x280 mm + 2x560 mm per aluminium profile)				P _{el} = 24.5 W U _{typ.} = 69.7 V		P _{el} = 36 W U _{typ.} = 72 V		P _{el} = 52.3 W U _{typ.} = 74.8 V	
ALUFixSMD / 1429 / 30	1x30 + 2x60	warm white	3000	3910	160	5490	152	7510	143
ALUFixSMD / 1429 / 40	1x30 + 2x60	neutral white	4000	4090	168	5740	159	7860	150
ALUFixSMD / 1429 / 50	1x30 + 2x60	neutral white	5000	4460	183	6265	174	8575	164
ALUFixSMD / 1429 / 65	1x30 + 2x60	cool white	6500	4300	176	6035	168	8250	158
High Brightness – 305 mm (1 SMD module 280 mm)				P _{el} = 9.7 W U _{typ.} = 27.8 V		P _{el} = 14.3 W U _{typ.} = 28.6 V		P _{el} = 20.7 W U _{typ.} = 29.6 V	
ALUFixSMD / 305 / 30	1x30	warm white	3000	1455	149	2040	143	2790	135
ALUFixSMD / 305 / 40	1x30	neutral white	4000	1535	158	2155	151	2945	142
ALUFixSMD / 305 / 50	1x30	neutral white	5000	1605	165	2255	158	3080	149
ALUFixSMD / 305 / 65	1x30	cool white	6500	1570	161	2205	154	3015	145
High Brightness – 586 mm (1 SMD module 560 mm)				P _{el} = 19.5 W U _{typ.} = 55.6 V		P _{el} = 28.6 W U _{typ.} = 57.1 V		P _{el} = 41.4 W U _{typ.} = 59.2 V	
ALUFixSMD / 586 / 30	1x60	warm white	3000	2905	149	4080	143	5575	135
ALUFixSMD / 586 / 40	1x60	neutral white	4000	3070	158	4310	151	5890	142
ALUFixSMD / 586 / 50	1x60	neutral white	5000	3210	165	4505	158	6160	149
ALUFixSMD / 586 / 65	1x60	cool white	6500	3140	161	4410	154	6025	145
High Brightness – 867 mm (2 wired SMD modules 1x280 mm + 1x560 mm per aluminium profile)				P _{el} = 29.2 W U _{typ.} = 83.4 V		P _{el} = 42.9 W U _{typ.} = 85.7 V		P _{el} = 62.1 W U _{typ.} = 88.8 V	
ALUFixSMD / 867 / 30	1x30 + 1x60	warm white	3000	4360	149	6120	143	8365	135
ALUFixSMD / 867 / 40	1x30 + 1x60	neutral white	4000	4605	158	6465	151	8835	142
ALUFixSMD / 867 / 50	1x30 + 1x60	neutral white	5000	4815	165	6760	158	9240	149
ALUFixSMD / 867 / 65	1x30 + 1x60	cool white	6500	4710	161	6615	154	9040	145
High Brightness – 1148 mm (2 wired SMD modules 560 mm per aluminium profile)				P _{el} = 39 W U _{typ.} = 111.2 V		P _{el} = 57.9 W U _{typ.} = 114.2 V		P _{el} = 82.8 W U _{typ.} = 118.4 V	
ALUFixSMD / 1148 / 30	2x60	warm white	3000	5810	149	8160	143	11,150	135
ALUFixSMD / 1148 / 40	2x60	neutral white	4000	6140	158	8620	151	11,780	142
ALUFixSMD / 1148 / 50	2x60	neutral white	5000	6420	165	9010	158	12,320	149
ALUFixSMD / 1148 / 65	2x60	cool white	6500	6280	161	8820	154	12,050	145
High Brightness – 1429 mm (3 wired SMD modules 1x280 mm + 2x560 mm per aluminium profile)				P _{el} = 48.7 W U _{typ.} = 139 V		P _{el} = 72.2 W U _{typ.} = 142.8 V		P _{el} = 103.5 W U _{typ.} = 148 V	
ALUFixSMD / 1429 / 30	1x30 + 2x60	warm white	3000	7265	149	10200	143	13940	135
ALUFixSMD / 1429 / 40	1x30 + 2x60	neutral white	4000	7675	158	10775	151	14725	142
ALUFixSMD / 1429 / 50	1x30 + 2x60	neutral white	5000	8025	165	11265	158	15400	149
ALUFixSMD / 1429 / 65	1x30 + 2x60	cool white	6500	7850	161	11025	154	15065	145


* Measurement tolerance of luminous flux: ±7%

LED Line AluFix SMD Gen. 2 – Cover

Technical notes

LED Line AluFix SMD Gen. 2 – Cover

Material: Aluminium profile and PMMA cover
 Rear connection leads: Cu tinned, single-core
 0.32 mm² (AWG22), PVC-insulation, red and black,
 notched lead ends, lead length: L + 80 mm
 Degree of protection: IP40
 Rear slots for screws M3
 Tightening torque: 0.5 Nm

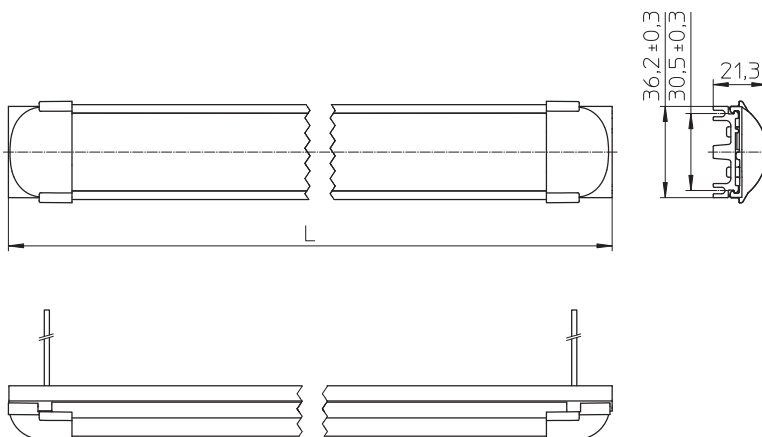

Type	Dimensions (LxWxH) in mm			Packaging unit (pcs.)	Weight g
	L	W	H		
89001	305	36.2	21,3	15	171
89002	586	36.2	21,3	15	330
89003	867	36.2	21,3	15	495
89004	1148	36.2	21,3	15	650
89005	1429	36.2	21,3	15	815

Reference numbers – LED Line AluFix SMD Gen. 2 – Cover

Type / Total length	89001 / 305 mm		89002 / 586 mm		89003 / 867 mm		89004 / 1148 mm		89005 / 1429 mm	
Cover	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse	Clear	Diffuse
For LED Line AluFix SMD Gen. 2 – Cover										
3000K	561307	561311	561315	561319	561323	561327	561331	561335	561339	561343
4000K	561308	561312	561316	561320	561324	561328	561332	561336	561340	561344
5000K	561309	561313	561317	561321	561325	561329	561333	561337	561341	561345
6500K	561310	561314	561318	561322	561326	561330	561334	561338	561342	561346
For LED Line AluFix SMD Gen. 2 – Cover – High Brightness										
3000K	561347	561351	561355	561359	561363	561367	561371	561375	561379	561383
4000K	561348	561352	561356	561360	561364	561368	561372	561376	561380	561384
5000K	561349	561353	561357	561361	561365	561369	561373	561377	561381	561385
6500K	561350	561354	561358	561362	561366	561370	561374	561378	561382	561386

1

2

3

4

5

6

7

8

9

10

11

12

LED Line SMD LightBar

LED built-in module

The new SMD LightBar modules constitute a highly effective SMD solution. Available in sets of six, the new modules are particularly suitable for installation in louvered luminaires (600x600 mm).

The SMD LightBar modules come in various shades of white and with a set of 6 leads (Ref. No. 559935) for easy, low-cost and solder-free connection. All six connectors must be attached (in series) to modules.



Technical notes

Dimensions: 520x17 mm
Driving current: up to 300 mA

Typical applications

Built-in luminaires/general illumination:

- Office lighting
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting

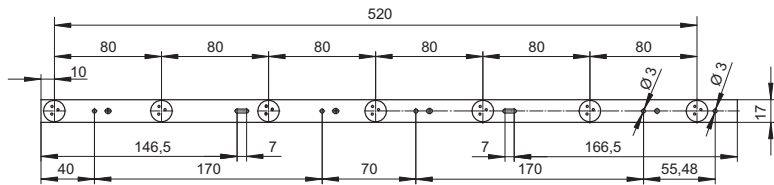


Type	Ref. No.	No. of LEDs pcs.	Colour	Correlated colour temperature K	Typ. luminous flux* and efficiency, typ. voltage ($U_{typ.}$) and power consumption (P_{el}) at 300 mA		Typ. beam angle °	CRI R_a		
					lm	lm/W		min.	typ.	
					$P_{el} = 6.9 \text{ W}; U_{typ.} = 23.1 \text{ V}$					
89520	559932	7	warm white	3000	595	86	145	80	85	
89520	559933	7	neutral white	4000	630	91	145	80	85	
89520	557990	7	cool white	5700	665	96	145	80	85	
89520	559509	7	cool white	5700	700	102	145	80	85	
89520	559934	7	cool white	11000	520	96	145	70	75	

* Measurement tolerance of luminous flux: $\pm 10\%$ | Min. CRI R_a : $> 70 / > 80$

Connection lead

Lead with 6 plugs (connected in series)
Lead: UL 1007 22AWG 1C Red / White
JST-PH-3Pn-Serial MINI JST PH 3pin Male
Lead length (L): 1325 mm
Lead ends, tinned, 10 mm
All connectors must be attached to modules.
Type: 89520
Ref. No.: **559935**

Connection assembly

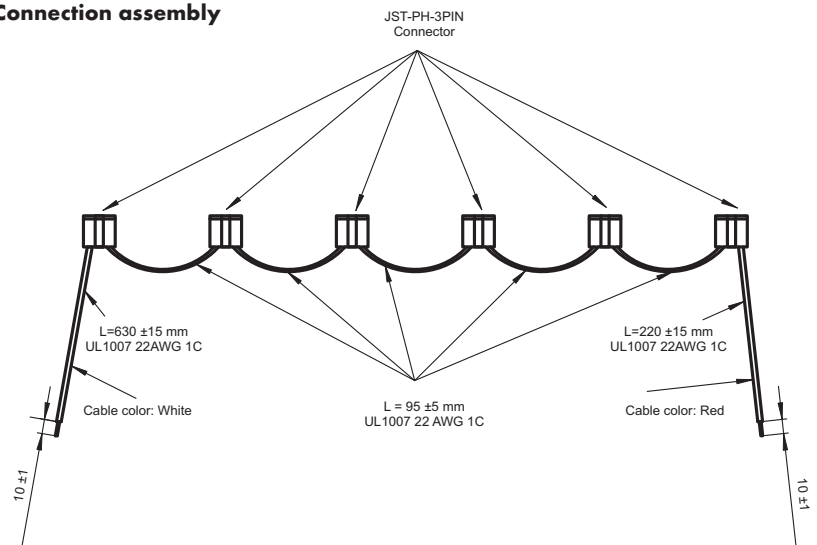

LED Light Panel SMD 250 x 250

Built-in lighting modules

The new LED light panels are a highly effective SMD solution for producing very homogeneous, widely distributed light. They are particularly suitable for integration in louvered luminaires (600 x 600 mm).



These LED SMD modules are available in various shades of white and permit easy, cost-effective and solder-free connection using push-in connectors.

Technical notes

- Dimensions: 249 x 249 mm
- On-board push-in terminals
- Fixing holes: Ø 4.5 mm
- Use of external LED constant-current drivers
- Efficiency up to 190 lm/W
- Colour rendering index R_a : typ. 85
- Lumen maintenance L80/B10:
up to 60,000 hrs. (I_f 350 mA, $t_p = 70^\circ\text{C}$)
- Packaging unit: 50 pcs.

Typical applications

- Office lighting
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

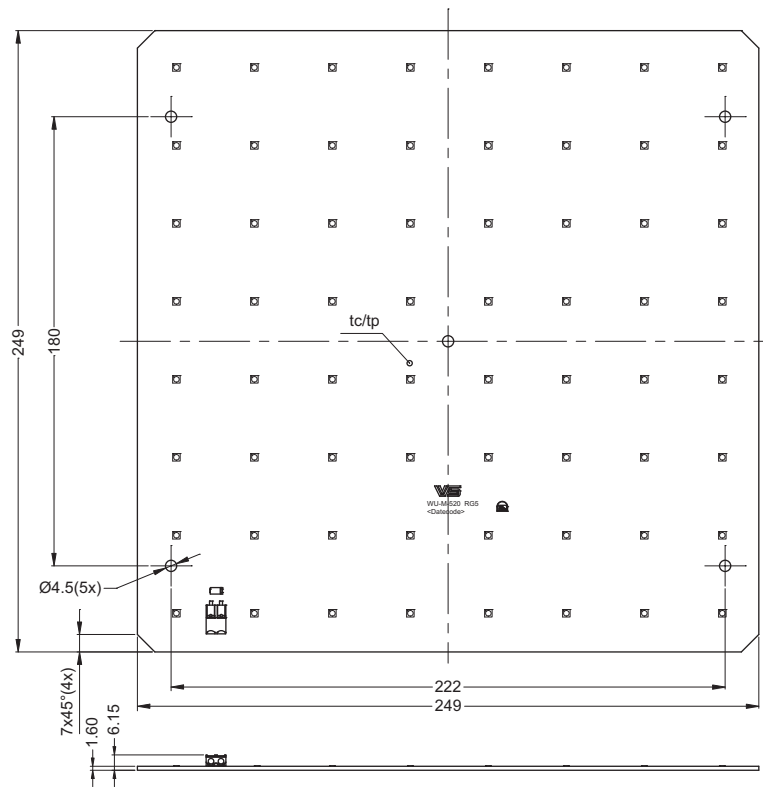

Type	Ref. No.	Colour	Correlated colour temperature K	Luminous flux* and typ. efficiency*, voltage (U) and power consumption (P _{el})									Typ. beam angle °	CRI	
				350 mA			500 mA			700 mA				min.	typ.
				min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	R _a	R _a	
				P _{el} = 7.1 - 8.5 W U = 20.4 - 24.4 V			P _{el} = 10.5 - 12.5 W U = 21 - 25 V			P _{el} = 15.2 - 18 W U = 21.7 - 25.7 V					
WU-M-520-830	559648	warm white	3000 -80/+130	1160	1260	167	1630	1770	158	2235	2425	148	120	80	85
WU-M-520-840	558905	neutral white	4000 -160/+115	1210	1320	174	1700	1855	165	2330	2535	155	120	80	85
WU-M-520-850	559649	neutral white	5000 -125/+155	1260	1440	190	1770	2020	181	2425	2770	169	120	80	85
WU-M-520-865	559650	cool white	6500 -165/+220	1260	1385	183	1770	1945	174	2425	2665	163	120	80	85

Emission data at $t_p = 50^\circ\text{C}$ | Products under development; preliminary technical datas | * Measurement tolerance: $\pm 7\%$

LED Light Panel SMD 270x270

Built-in lighting modules

The new LED light panels are a highly effective SMD solution for producing very homogeneous, widely distributed light. They are particularly suitable for integration in louvered luminaires (600 x 600 mm).



These LED SMD modules are available in various shades of white and permit easy, cost-effective and solder-free connection using push-in connectors.

Technical notes

- Dimensions: 269x269 mm
- On-board push-in terminals
- Fixing holes: Ø 4.5 mm
- Use of external LED constant-current drivers
- Efficiency up to 190 lm/W
- Colour rendering index R_a : typ. 85
- Lumen maintenance L80/B10:
up to 60,000 hrs. (I_f 350 mA, $t_p = 70^\circ\text{C}$)
- Packaging unit: 50 pcs.

Typical applications

- Office lighting
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

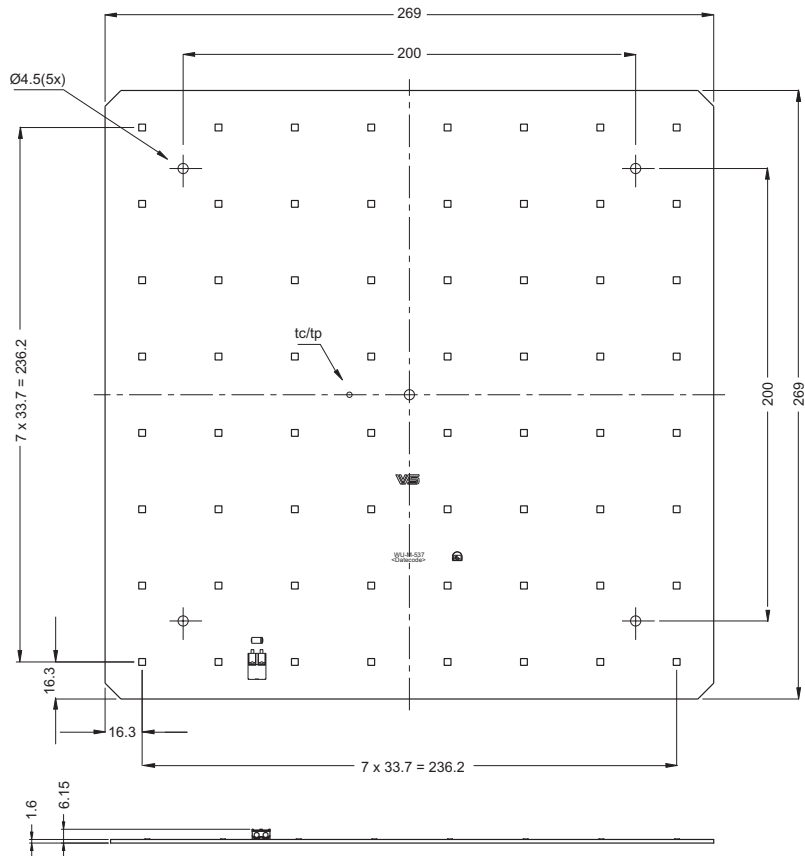

Type	Ref. No.	Colour	Correlated colour temperature K	Luminous flux* and typ. efficiency*, voltage (U) and power consumption (P_{el})									Typ. beam angle °	CRI	
				350 mA			500 mA			700 mA				min.	typ.
				min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	R_a	R_a	
				$P_{el} = 7.1 - 8.5\text{ W}$			$P_{el} = 10.5 - 12.5\text{ W}$			$P_{el} = 15.2 - 18\text{ W}$					
				$U = 20.4 - 24.4\text{ V}$			$U = 21 - 25\text{ V}$			$U = 21.7 - 25.7\text{ V}$					
WU-M-537-830	561098	warm white	3000 -80/+130	1160	1260	167	1630	1770	158	2235	2425	148	120	80	85
WU-M-537-840	561099	neutral white	4000 -160/+115	1210	1320	174	1700	1855	165	2330	2535	155	120	80	85
WU-M-537-850	561100	neutral white	5000 -125/+155	1260	1440	190	1770	2020	181	2425	2770	169	120	80	85
WU-M-537-865	561101	cool white	6500 -165/+220	1260	1385	183	1770	1945	174	2425	2665	163	120	80	85

Emission data at $t_p = 50^\circ\text{C}$ | Products under development; preliminary technical datas | * Measurement tolerance: $\pm 7\%$

LUGA Shop 2015 PCB – 1000 lm to 8000 lm

Built-in lighting modules

This PCB version of the LUGA Shop 2015 series provides the option of simply replacing LED modules within their holder.

Simple and secure attachment is enabled with separate holders (see page 53).

Technical notes

Dimensions: 19x19 mm, 28x28 mm

Light emitting surface (LES): \varnothing 14 mm, \varnothing 17 mm, \varnothing 20 mm

Beam angle: 120°

Allowed operating temperature at t_c point:

-40 to 80 °C

Use of external LED constant current driver

Efficiency up to 175 lm/W

Colour rendering index R_G : typ. > 70 / > 80 / > 90

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L90/B10:

> 52,000 hrs. (I_F 700 mA, t_p = 65 °C)

Packaging unit: 175 pcs. (DMS099),

100 pcs. (DMS120/DMS150)


Typical applications

Integration in


- Reflector luminaires
- Flat surface-mounting luminaires
- Cladding illumination
- Suspended luminaire with external control gear

For use in


- Retail lighting
- Furniture lighting
- Stairway and corridor illumination




DMS099***F



DMS120***F

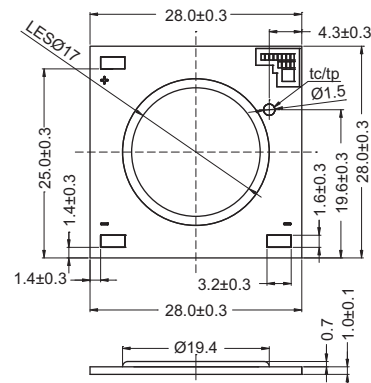


DMS150***F

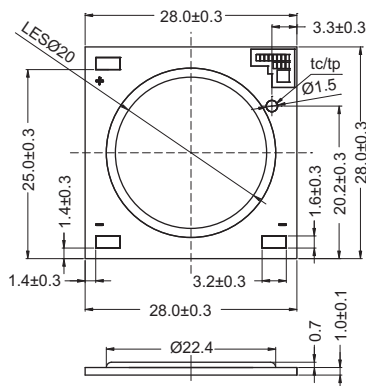

LUGA Shop 2015 PCB – 1000 lm to 8000 lm

Characteristics

- Optimized for retail and furniture illumination
- CRI 70 version for industrial and outdoor lighting
- Highly efficient: up to 175 lm/W

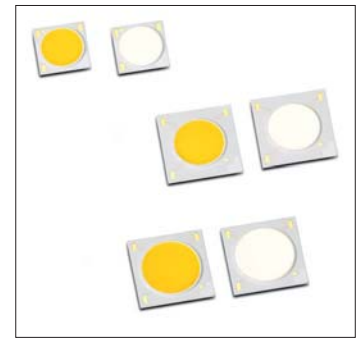

LUGA Shop 2015 PCB – CRI R_a > 80 (70)


Type	Ref. No.	Colour	Correlated colour temperature* (K)	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**										Typ. CRI R _a	
				350 mA		500 mA		700 mA		1050 mA		1400 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
DMS099C				P _{el} = 8.7 W U _{typ.} = 24.7 V		P _{el} = 12.6 W U _{typ.} = 25.3 V		P _{el} = 18.1 W U _{typ.} = 25.8 V		P _{el} = 28 W U _{typ.} = 26.7 V		P _{el} = 38.1 W U _{typ.} = 27.3 V			
DMS099C27F	558922	warm white	2700	1195	137	1685	134	2265	125	3170	113	3920	103	82	
DMS099C30F	558231	warm white	3000	1285	148	1810	144	2435	135	3410	122	4220	111	85	
DMS099C30FB	558232	warm white	3000 (below BBL)	1220	140	1715	136	2305	127	3230	115	4010	105	85	
DMS099C35F	558923	neutral white	3500	1320	152	1850	147	2485	137	3490	125	4320	113	85	
DMS099C35FB	558924	neutral white	3500 (below BBL)	1245	143	1750	139	2350	130	3285	117	4070	107	85	
DMS099C40F	558925	neutral white	4000	1335	153	1885	150	2530	140	3545	127	4380	115	85	
DMS099C40FB	558926	neutral white	4000 (below BBL)	1260	145	1770	140	2380	131	3335	119	4130	108	85	
DMS099C50F	558927	cool white	5000	1345	155	1900	151	2550	141	3575	128	4430	116	85	
DMS120C / DMS120B				P _{el} = 11.5 W U _{typ.} = 32.9 V		P _{el} = 16.7 W U _{typ.} = 33.4 V		P _{el} = 23.9 W U _{typ.} = 34.1 V		P _{el} = 37 W U _{typ.} = 35.3 V		P _{el} = 50.4 W U _{typ.} = 36 V			
DMS120C27F	558932	warm white	2700	1665	145	2295	137	3090	129	4305	116	5315	105	82	
DMS120C30F	558234	warm white	3000	1785	155	2470	148	3320	139	4635	125	5725	114	85	
DMS120C30FB	558235	warm white	3000 (below BBL)	1695	147	2345	140	3150	132	4400	119	5435	108	85	
DMS120C35F	558933	neutral white	3500	1830	159	2535	152	3405	142	4750	128	5865	116	85	
DMS120C35FB	558934	neutral white	3500 (below BBL)	1720	150	2380	143	3205	134	4470	121	5515	109	85	
DMS120C40F	558935	neutral white	4000	1860	162	2565	154	3450	144	4820	130	5955	118	85	
DMS120C40FB	558936	neutral white	4000 (below BBL)	1750	152	2420	145	3260	136	4545	123	5605	111	85	
DMS120C50F	558937	cool white	5000	1875	163	2590	155	3480	146	4865	131	6005	119	85	
DMS120B50F	on request	cool white	5000	1980	172	2740	164	3685	154	5145	139	6355	126	70	
DMS150C / DMS150B				P _{el} = 14.4 W U _{typ.} = 41.1 V		P _{el} = 20.9 W U _{typ.} = 41.8 V		P _{el} = 29.9 W U _{typ.} = 42.7 V		P _{el} = 46.4 W U _{typ.} = 44.2 V		P _{el} = 63 W U _{typ.} = 45 V			
DMS150C27F	558943	warm white	2700	2110	147	2925	140	3945	132	5560	120	6880	109	82	
DMS150C30F	558237	warm white	3000	2275	158	3150	151	4245	142	5980	129	7410	118	85	
DMS150C30FB	558238	warm white	3000 (below BBL)	2155	150	2990	143	4030	135	5675	122	7035	112	85	
DMS150C35F	558944	neutral white	3500	2330	162	3230	155	4355	146	6125	132	7595	121	85	
DMS150C35FB	558945	neutral white	3500 (below BBL)	2185	152	3040	145	4095	137	5770	124	7145	113	85	
DMS150C40F	558946	neutral white	4000	2360	164	3275	157	4420	148	6210	134	7705	122	85	
DMS150C40FB	558947	neutral white	4000 (below BBL)	2220	154	3085	148	4160	139	5865	126	7260	115	85	
DMS150C50F	558948	cool white	5000	2380	165	3300	158	4450	149	6285	135	7775	123	85	
DMS150B50F	on request	cool white	5000	2525	175	3500	167	4720	158	6640	143	8225	131	70	

Emission data at T_p = 65 °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10% | Min. CRI R_a: > 80 (70)

LUGA Shop 2015 PCB HiCRI – 1000 lm to 8000 lm

Characteristics


- Typ. colour rendering index (CRI): $R_a > 90$

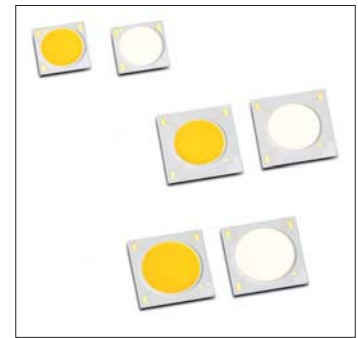

LUGA Shop 2015 PCB HiCRI – CRI $R_a > 90$

Type	Ref. No.	Colour	Correlated colour temperature* (K)	Typ. luminous flux and efficiency, typ. voltage ($U_{typ.}$) and power consumption (P_{el})**										Typ. CRI R_a	
				350 mA		500 mA		700 mA		1050 mA		1400 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
DMS099S**F				$P_{el} = 8.7\text{ W}$ $U_{typ.} = 24.7\text{ V}$		$P_{el} = 12.6\text{ W}$ $U_{typ.} = 25.8\text{ V}$		$P_{el} = 18.1\text{ W}$ $U_{typ.} = 25.8\text{ V}$		$P_{el} = 28\text{ W}$ $U_{typ.} = 26.7\text{ V}$		$P_{el} = 38.1\text{ W}$ $U_{typ.} = 27.3\text{ V}$			
DMS099S27F	558928	warm white	2700 (below BBL)	970	111	1365	108	1835	101	2565	92	3185	84	95	
DMS099S30F	558929	warm white	3000 (below BBL)	1040	120	1460	116	1965	109	2755	98	3415	90	95	
DMS099S35F	558930	neutral white	3500 (below BBL)	1105	127	1560	124	2090	115	2930	105	3630	95	95	
DMS099S40F	558931	neutral white	4000 (below BBL)	1145	132	1615	128	2165	120	3035	108	3750	98	95	
DMS120S**F				$P_{el} = 11.5\text{ W}$ $U_{typ.} = 32.9\text{ V}$		$P_{el} = 16.7\text{ W}$ $U_{typ.} = 34.1\text{ V}$		$P_{el} = 23.9\text{ W}$ $U_{typ.} = 34.1\text{ V}$		$P_{el} = 37\text{ W}$ $U_{typ.} = 35.3\text{ V}$		$P_{el} = 50.4\text{ W}$ $U_{typ.} = 36\text{ V}$			
DMS120S27F	558938	warm white	2700 (below BBL)	1345	117	1860	111	2500	105	3500	95	4315	86	95	
DMS120S30F	558940	warm white	3000 (below BBL)	1445	126	1995	119	2685	112	3755	101	4635	92	95	
DMS120S35F	558941	neutral white	3500 (below BBL)	1535	133	2120	127	2855	119	3985	108	4915	98	95	
DMS120S40F	558942	neutral white	4000 (below BBL)	1590	138	2190	131	2950	123	4120	111	5095	101	95	
DMS150S**F				$P_{el} = 14.4\text{ W}$ $U_{typ.} = 41.1\text{ V}$		$P_{el} = 20.9\text{ W}$ $U_{typ.} = 42.7\text{ V}$		$P_{el} = 29.9\text{ W}$ $U_{typ.} = 42.7\text{ V}$		$P_{el} = 46.4\text{ W}$ $U_{typ.} = 44.2\text{ V}$		$P_{el} = 63\text{ W}$ $U_{typ.} = 45\text{ V}$			
DMS150S27F	558949	warm white	2700 (below BBL)	1715	119	2370	113	3195	107	4515	97	5590	89	95	
DMS150S30F	558239	warm white	3000 (below BBL)	1835	127	2545	122	3430	115	4850	105	5995	95	95	
DMS150S35F	558950	neutral white	3500 (below BBL)	1955	136	2705	129	3645	122	5140	111	6375	101	95	
DMS150S40F	558951	neutral white	4000 (below BBL)	2020	140	2800	134	3775	126	5320	115	6585	105	95	

Emission data at $t_p = 65\text{ °C}$ | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: $\pm 10\%$ | Min. CRI R_a : > 90



LUGA Shop 2015 PCB – Pearl White

Characteristics

- Brilliant white light
- For retail lighting, especially fashion lighting
- Similar colour impression like C-HI lamps
- Highly efficient: up to 131 lm/W



LUGA Shop 2015 PCB – Pearl White – CRI R_a > 90

Type	Ref. No.	Colour	Correlated colour temperature* (K)	Typ. luminous flux and efficiency and typ. voltage (U _{typ.}) and power consumption (P _{el})**										Typ. CRI R _a	
				350 mA		500 mA		700 mA		1050 mA		1400 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W		
DMS099S31FP				P _{el} = 8.7 W U _{typ.} = 24.7 V		P _{el} = 12.6 W U _{typ.} = 25.3 V		P _{el} = 18.1 W U _{typ.} = 25.8 V		P _{el} = 28 W U _{typ.} = 26.7 V		P _{el} = 38.1 W U _{typ.} = 27.3 V			
DMS099S31FP	558233	pearl white	3100	1070	123	1500	119	2015	111	2825	101	3495	92	95	
DMS120S31FP				P _{el} = 11.5 W U _{typ.} = 32.9 V		P _{el} = 16.7 W U _{typ.} = 33.4 V		P _{el} = 23.9 W U _{typ.} = 34.1 V		P _{el} = 37 W U _{typ.} = 35.3 V		P _{el} = 50.4 W U _{typ.} = 36 V			
DMS120S31FP	558236	pearl white	3100	1480	129	2040	122	2745	115	3850	104	4745	94	95	
DMS150S31FP				P _{el} = 14.4 W U _{typ.} = 41.1 V		P _{el} = 20.9 W U _{typ.} = 41.8 V		P _{el} = 29.9 W U _{typ.} = 42.7 V		P _{el} = 46.4 W U _{typ.} = 44.2 V		P _{el} = 63 W U _{typ.} = 45 V			
DMS150S31FP	558240	pearl white	3100	1890	131	2625	126	3540	118	4985	107	6180	98	95	

Emission data at t_p = 65 °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10% | Min. CRI R_a: > 90

LUGA Shop 2015 PCB – FOOD

Characteristics

- Optimized for use in all retail areas – especially for fresh food (bread, fruits, vegetables, meat)

Type	Ref. No.	Colour	Correlated colour temperature* K	Typ. luminous flux and efficiency, typical voltage (U _{typ.}) and power consumption (P _{el})**						Typ. CRI R _a	Typical applications
				700 mA		1050 mA		1400 mA			
				lm	lm/W	lm	lm/W	lm	lm/W		
LUGA Shop FOOD				P _{el} = 29.9 W U _{typ.} = 42.7 V		P _{el} = 46.4 W U _{typ.} = 44.2 V		P _{el} = 63 W U _{typ.} = 45 V			
DMS150G30F	558952	warm white	3000	2540	85	3580	77	4440	70	85 (special spectrum: HiGa) Bread, fruits, vegetables, cheese	
DMS150G40F	558953	neutral white	4000	2625	88	3705	80	4585	73	85 (special spectrum: HiGa) Fish, drugstore, textiles	
DMS150P19F	558954	"pink effect"	2000	2370	79	3340	72	4145	66	82 Meat	
DMS150P40F	558955	"white effect"	4000	2040	68	2870	62	3560	57	70 (special spectrum: HiGa) Meat	

Emission data at t_p = 65 °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

PCB Holder for LUGA Shop 2015 and LUGA C 2015 Modules

For LUGA Shop 2015: DMS099***F / DMS120***F / DMS150***F
For LUGA C 2016: DMC124***F / DMC125***F / DMC128***F (1500–4500 lm)
 DMC12C***F / DMC18C***F (3000–15,000 lm)

The combination of PCB version and holder provides the option of simply replacing LED modules within their holder. Simple and secure attachment is enabled with a separate holder.

The PCB clicks into the opening on the reverse of the holder. In doing so, care must be taken to ensure correct polarity is maintained. The holder with the inserted PCB is then turned around and fixed with two screws. The holder also features lateral connection openings into which the electrical leads can be pushed.

Dependent on the used thermal conductive material and the power classes the expected service life times can differ from the values on the data sheet LUGA C/Shop 2015.

Holder

For LUGA C PCB DMC124***F, DMC125***F, DMC128***F and LUGA Shop 2015 DMS099***F

Dimensions (ØxH): 35 x 4.2 mm

Material: PBT, white


Fixing holes for screws M3

Hole distance: 25 mm

Packaging unit: 500 pcs.

Type: 89721

Ref. No.: 559165 Ø 35 mm



Phase-change thermal pads (PC TIM)

For optimum heat dissipation

Softening temperature: 45 to 55 °C

Solid material at room temperature for easy assembly

Thermal conductivity R_{th} : 3 W/mK

Ref. No.: 561002 for Ø 35 mm

Ref. No.: 561003 for Ø 50 mm



Holder

For LUGA C PCB DMC12C***F, DMC18C***F and LUGA Shop 2015 DMS120***F, DMS150***F

Dimensions (ØxH): 50 x 4.2 mm

Material: PBT, white


Fixing holes for screws M3

Hole distance: 35 mm

Packaging unit: 500 pcs.

Type: 89720

Ref. No.: 559164 Ø 50 mm



Ring reflector

For PCB holder, type: 89720, Ø 50 mm

For changing the height of the holder

Diameter: Ø 42 mm (incl. clip: 43 mm)

Height incl. holder: 7 mm


Material: PC, white

Beam angle: 90°

Packaging unit: 1000 pcs.

Type: 89720

Ref. No.: 560347



1

2

3

4

5

6

7

8

9

10

11

12

LUGA C 2016 – 500 lm to 4500 lm

Built-in lighting modules

Due to their tiny size, the LUGA C modules are particularly suitable as a replacement for mains and low-voltage halogen lamps.

As LUGA C modules are capable of delivering lumen packages of up to 4500 lm, they can also be used for retail lighting and in downlights.



Technical notes

Dimensions

DMC122: 13.5x13.5x1.7 mm

DMC124/DMC125/

DMC128: 19x19x1.7 mm

Light emitting surface (LES)

DMC122: Ø 8 mm

DMC124/DMC125: Ø 11.1 mm

DMC128: Ø 13.8 mm

Allowed operating temperature at t_c point:

-40 to 85 °C

-40 to 80 °C (DMC104: > 500 mA)

-40 to 75 °C (DMC118: > 700 mA)

Use of external LED constant current driver

Efficiency up to 163 lm/W

Colour rendering index R_a : > 80 / > 90

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L90/B10

DMC122: 53.000 hrs. (I_F 150 mA)

DMC124: 48.000 hrs. (I_F 350 mA)



DMC125/DMC128: 50.000 hrs. (I_F 350 mA)

Packaging unit:


225 pcs. (DMC122)

175 pcs. (DMC124/DMC125/DMC118)


DMC122C**F



DMC124C**F / DMC125C**F / DMC124D31FP / DMC125D31FP



DMC128C**F / DMC128D31FP



Typical applications

Integration in

- Reflector luminaires for replacement of halogen mains and low-voltage lamps
- Flat surface-mounting luminaires
- Downlights


For use in

- Residential lighting
- Furniture lighting
- Stairway and corridor illumination

LUGA C 2016 – 500 lm to 1000 lm

Characteristics

- Optimized for lumen packages ≤ 1000 lm
- Highly efficient: up to 140 lm/W

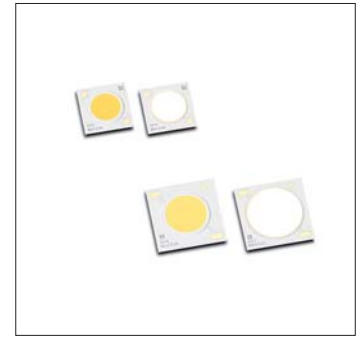

LUGA C 2016 – CRI R_a > 80

Type	Ref. No.	Colour	Correlated colour temp.* K	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**						Typ. beam angle (°)	Typ. CRI R _a
				150 mA		200 mA		250 mA			
				lm	lm/W	lm	lm/W	lm	lm/W		
				P _{el} = 5.2 W U _{typ.} = 34.4 V		P _{el} = 7 W U _{typ.} = 35.2 V		P _{el} = 9 W U _{typ.} = 35.8 V			
DMC122C27F	560392	warm white	2700	650	125	830	119	995	111	120	82
DMC122C30F	560394	warm white	3000	705	136	900	129	1080	120	120	85
DMC122C35F	560395	neutral white	3500	710	137	905	129	1085	121	120	85
DMC122C40F	560396	neutral white	4000	725	139	925	132	1105	123	120	85
DMC122C50F	560397	cool white	5000	730	140	935	134	1120	124	120	85

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

LUGA C 2016 – CRI R_a > 90

Type	Ref. No.	Colour	Correlated colour temp.* K	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**						Typ. beam angle (°)	Typ. CRI R _a
				150 mA		200 mA		250 mA			
				lm	lm/W	lm	lm/W	lm	lm/W		
				P _{el} = 5.2 W U _{typ.} = 34.4 V		P _{el} = 7 W U _{typ.} = 35.2 V		P _{el} = 9 W U _{typ.} = 35.8 V			
DMC122S27F	560449	warm white	2700 (below BBL)	510	98	650	93	775	86	120	95
DMC122S30F	560450	warm white	3000 (below BBL)	545	105	700	100	835	93	120	95
DMC122S35F	560451	neutral white	3500 (below BBL)	580	112	740	106	890	99	120	95
DMC122S40F	560452	neutral white	4000 (below BBL)	605	116	770	110	920	102	120	95

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

LUGA C 2016 – Pearl White

LUGA C 2016 – CRI R_a > 80 / > 90

Type	Ref. No.	Colour	Correlated colour temp.* K	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**						Typ. beam angle (°)	Typ. CRI R _a
				150 mA		200 mA		250 mA			
				lm	lm/W	lm	lm/W	lm	lm/W		
				P _{el} = 5.2 W U _{typ.} = 34.4 V		P _{el} = 7 W U _{typ.} = 35.2 V		P _{el} = 9 W U _{typ.} = 35.8 V			
DMC122C31FP	560418	pearl white	3100	690	133	880	126	1055	117	120	85
DMC122S31FP	560465	pearl white	3100	560	108	715	102	855	95	120	95

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

LUGA C 2016 – 1500 lm to 4500 lm

Characteristics

- Optimized for lumen packages from 1500 lm to 4500 lm
- Highly efficient: up to 163 lm/W



LUGA C 2016 – CRI R_a > 80

Type	Ref. No.	Colour	Correlated colour temp.* (K)	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**								Typ. beam angle (°)	Typ. CRI R _a
				350 mA		500 mA		700 mA		1050 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W		
DMC124C**F				P _{el} = 12.2 W U _{typ.} = 34.8 V		P _{el} = 17.9 W U _{typ.} = 35.8 V							
DMC124C27F	560398	warm white	2700	1515	124	2040	114	–	–	–	–	120	82
DMC124C30F	560399	warm white	3000	1645	135	2220	124	–	–	–	–	120	85
DMC124C35F	560401	neutral white	3500	1660	136	2240	125	–	–	–	–	120	85
DMC124C40F	560403	neutral white	4000	1700	139	2280	127	–	–	–	–	120	85
DMC124C50F	560405	cool white	5000	1715	141	2305	129	–	–	–	–	120	85
DMC125C**F				P _{el} = 12 W U _{typ.} = 34.2 V		P _{el} = 17.6 W U _{typ.} = 35.1 V		P _{el} = 25.2 W U _{typ.} = 36 V					
DMC125C27F	560406	warm white	2700	1520	127	2035	116	2595	103	–	–	120	82
DMC125C30F	560407	warm white	3000	1650	138	2215	126	2810	112	–	–	120	85
DMC125C30FB	560408	warm white	3000 (below BBL)	1555	130	2090	119	2660	106	–	–	120	85
DMC125C35F	560409	neutral white	3500	1670	139	2235	127	2840	113	–	–	120	85
DMC125C40F	560410	neutral white	4000	1700	142	2280	130	2900	115	–	–	120	85
DMC125C50F	560411	cool white	5000	1715	143	2300	131	2920	116	–	–	120	85
DMC128C**F				P _{el} = 11.6 W U _{typ.} = 33.2 V		P _{el} = 16.9 W U _{typ.} = 33.9 V		P _{el} = 24.3 W U _{typ.} = 34.7 V		P _{el} = 37.5 W U _{typ.} = 35.7 V			
DMC128C27F	560412	warm white	2700	1665	144	2285	135	3025	124	4040	108	120	82
DMC128C30F	560413	warm white	3000	1810	156	2480	147	3275	135	4380	117	120	85
DMC128C30FB	560414	warm white	3000 (below BBL)	1710	147	2340	138	3095	127	4145	111	120	85
DMC128C35F	560415	neutral white	3500	1820	157	2505	148	3315	136	4430	118	120	85
DMC128C40F	560416	neutral white	4000	1865	161	2550	151	3375	139	4515	120	120	85
DMC128C50F	560417	cool white	5000	1885	163	2580	153	3405	140	4560	122	120	85

LUGA C 2016 – CRI R_a > 90

Type	Ref. No.	Colour	Correlated colour temp.* (K)	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**								Typ. beam angle (°)	Typ. CRI R _a
				350 mA		500 mA		700 mA		1050 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W		
DMC124S**F				P _{el} = 12.2 W U _{typ.} = 34.8 V		P _{el} = 17.9 W U _{typ.} = 35.8 V							
DMC124S27F	560453	warm white	2700 (below BBL)	1190	98	1605	90	–	–	–	–	120	95
DMC124S30F	560454	warm white	3000 (below BBL)	1275	105	1715	96	–	–	–	–	120	95
DMC124S35F	560455	neutral white	3500 (below BBL)	1355	111	1825	102	–	–	–	–	120	95
DMC124S40F	560456	neutral white	4000 (below BBL)	1400	115	1890	106	–	–	–	–	120	95
DMC125S**F				P _{el} = 12 W U _{typ.} = 34.2 V		P _{el} = 17.6 W U _{typ.} = 35.1 V		P _{el} = 15.2 W U _{typ.} = 36 V					
DMC125S27F	560457	warm white	2700 (below BBL)	1195	100	1600	91	2035	81	–	–	120	95
DMC125S30F	560458	warm white	3000 (below BBL)	1280	107	1710	97	2180	87	–	–	120	95
DMC125S35F	560459	neutral white	3500 (below BBL)	1360	113	1825	104	2325	92	–	–	120	95
DMC125S40F	560460	neutral white	4000 (below BBL)	1405	117	1885	107	2405	95	–	–	120	95
DMC128S**F				P _{el} = 11.6 W U _{typ.} = 33.2 V		P _{el} = 16.9 W U _{typ.} = 33.9 V		P _{el} = 24.3 W U _{typ.} = 34.7 V		P _{el} = 37.5 W U _{typ.} = 35.7 V			
DMC128S27F	560461	warm white	2700 (below BBL)	1310	113	1790	106	2370	98	3165	84	120	95
DMC128S30F	560462	warm white	3000 (below BBL)	1405	121	1920	114	2545	105	3390	90	120	95
DMC128S35F	560463	neutral white	3500 (below BBL)	1490	128	2040	121	2705	111	3610	96	120	95
DMC128S40F	560464	neutral white	4000 (below BBL)	1545	133	2115	125	2800	115	3740	100	120	95

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

LUGA C 2016 – 1500 lm to 4000 lm – Pearl White

Characteristics

- Brilliant white light



LUGA C 2016 – CRI R_a > 80 / > 90

Type	Ref. No.	Colour	Correlated colour temp.* (K)	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**								Typ. beam angle (°)	Typ. CRI R _a
				350 mA		500 mA		700 mA		1050 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W		
DMC124*31FP				P _{el} = 12.2 W U _{typ.} = 34.8 V		P _{el} = 17.9 W U _{typ.} = 35.8 V							
DMC124C31FP	560419	pearl white	3100	1610	132	2170	121	–	–	–	–	120	85
DMC124S31FP	560466	pearl white	3100	1310	107	1765	99	–	–	–	–	120	95
DMC125*31FP				P _{el} = 12 W U _{typ.} = 34.2 V		P _{el} = 17.6 W U _{typ.} = 35.1 V		P _{el} = 25.2 W U _{typ.} = 36 V					
DMC125C31FP	560420	pearl white	3100	1620	135	2165	123	2755	109	–	–	120	85
DMC125S31FP	560467	pearl white	3100	1315	110	1760	100	2245	89	–	–	120	95
DMC128*31FP				P _{el} = 11.6 W U _{typ.} = 33.2 V		P _{el} = 16.9 W U _{typ.} = 33.9 V		P _{el} = 24.3 W U _{typ.} = 34.7 V		P _{el} = 37.5 W U _{typ.} = 35.7 V			
DMC128C31FP	560421	pearl white	3100	1770	153	2430	144	3215	132	4295	115	120	85
DMC128S31FP	560468	pearl white	3100	1440	124	1975	117	2615	108	3485	93	120	95

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux, efficiency, voltage and power consumption: ±10%

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

LED Industrial and Hall Lighting

These LED modules are suitable for illuminating industrial, production, sports and warehouse facilities as well as for petrol stations (especially SYM II).

These modules are designed for built-in into luminaire casings. They enable a modular luminaire design.

The modules are available in four shapes (4, 8, 16 or 32 LEDs) and in three white colour tones.

Technical notes

LED built-in module for integration into luminaires

4, 8, 16 or 32 high-efficient High Power LEDs

Allowed operating temperature at t_c point
at $I_F = 700 \text{ mA}$: -30 to $85 \text{ }^\circ\text{C}$

Use of external LED constant current driver

Design for optimum thermal management

Efficiency up to 135 lm/W

Lumen maintenance L80/B10:

50,000 hrs. ($I_F 1050 \text{ mA}$) at $t_p 60 \text{ }^\circ\text{C}$

Colour accuracy initially: 5 SDCM

ESD protection class 2

Surge protection: 4 kV (except WU-M-479)

Typical applications

- Integration in outdoor luminaires
- Indoor lighting
- Industrial lighting for:
 - Production halls
 - Warehouses
- Petrol station lighting
- Lighting for sports facilities



LED Industrial and Hall Lighting

Optical characteristics

at $t_p = 60\text{ °C}$

Type	Colour	Correlated colour temperature* K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})**								CRI***	Photometric code	
IP20	IP67 (IP66)		350 mA		700 mA		1050 mA		1400 mA		R_g		
			lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W			
4 LEDs			$P_{el} = 3.9\text{ W}$ $U_{typ.} = 11\text{ V}$		$P_{el} = 8.1\text{ W}$ $U_{typ.} = 11.5\text{ V}$		$P_{el} = 12.5\text{ W}$ $U_{typ.} = 11.9\text{ V}$		$P_{el} = 17.2\text{ W}$ $U_{typ.} = 12.3\text{ V}$				
WU-M-479/4C-830	–	warm white	3000	490	127	925	115	1305	104	1625	94	≥ 80	830 / 579
WU-M-479/4C-840	–	neutral white	4000	520	135	980	122	1385	111	1730	100	≥ 80	840 / 579
WU-M-479/4C-850	–	cool white	5000	500	130	845	118	1335	107	1665	97	≥ 80	850 / 579
8 LEDs			$P_{el} = 7.7\text{ W}$ $U_{typ.} = 21.9\text{ V}$		$P_{el} = 16.1\text{ W}$ $U_{typ.} = 23\text{ V}$		$P_{el} = 25.1\text{ W}$ $U_{typ.} = 23.9\text{ V}$		$P_{el} = 34.4\text{ W}$ $U_{typ.} = 24.6\text{ V}$				
WU-M-479/8C-830	–	warm white	3000	975	127	1845	115	2605	104	3250	94	≥ 80	830 / 579
WU-M-479/8C-840	–	neutral white	4000	1040	135	1965	122	2770	111	3455	100	≥ 80	840 / 579
WU-M-479/8C-850	–	cool white	5000	1000	130	1895	118	2675	107	3335	97	≥ 80	850 / 579
16 LEDs			$P_{el} = 15.4\text{ W}$ $U_{typ.} = 43.9\text{ V}$		$P_{el} = 32.2\text{ W}$ $U_{typ.} = 46\text{ V}$		$P_{el} = 50.1\text{ W}$ $U_{typ.} = 47.7\text{ V}$		$P_{el} = 68.9\text{ W}$ $U_{typ.} = 49.2\text{ V}$				
WU-M-475-C-830	WU-M-425-C-830	warm white	3000	1955	127	3690	115	5210	104	6500	94	≥ 80	830 / 579
WU-M-475-C-840	WU-M-425-C-840	neutral white	4000	2075	135	3925	122	5540	111	6910	100	≥ 80	840 / 579
WU-M-475-C-850	WU-M-425-C-850	cool white	5000	2005	130	3790	118	5345	107	6670	97	≥ 80	850 / 579
WU-M-479/16C-830	–	warm white	3000	1955	127	3690	115	5210	104	6500	94	≥ 80	830 / 579
WU-M-479/16C-840	–	neutral white	4000	2075	135	3925	122	5540	111	6910	100	≥ 80	840 / 579
WU-M-479/16C-850	–	cool white	5000	2005	130	3790	118	5345	107	6670	97	≥ 80	850 / 579
32 LEDs			$P_{el} = 30.7\text{ W}$ $U_{typ.} = 87.7\text{ V}$		$P_{el} = 64.3\text{ W}$ $U_{typ.} = 91.9\text{ V}$		$P_{el} = 100.3\text{ W}$ $U_{typ.} = 95.5\text{ V}$		$P_{el} = 137.9\text{ W}$ $U_{typ.} = 98.5\text{ V}$				
–	WU-M-496-C-830	warm white	3000	3905	127	7385	115	10420	104	13000	94	≥ 80	830 / 579
–	WU-M-496-C-840	neutral white	4000	4155	135	7855	122	11080	111	13825	100	≥ 80	840 / 579
–	WU-M-496-C-850	cool white	5000	4005	130	7580	118	10695	107	13340	97	≥ 80	850 / 579

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes
The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.
** Production tolerance of voltage and power consumption: +10%/-4%; Measuring tolerance of luminous flux: $\pm 7\%$
*** Measuring tolerance of CRI: ± 2 | CRI > 70 on request



LED Industrial Light SYM I – IP20

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-479/4: 50x62.3x12 mm

WU-M-479/8: 50x113.2x12 mm

WU-M-479/16: 50x215x12 mm

WU-M-475: 120x120x12 mm

Degree of protection: IP20

Push-in terminals (WAGO series 2060)

Optics for hall lighting

Optimum illumination - installation ratio:

1:1 (height to distance) on the 0-180° layer


(lengthwise) or 8:5 (height to distance) on the

90-270° layer (crosswise)




Reference numbers


Type	Ref. No.	Number of LEDs
WU-M-479/4-C-830	561972	4
WU-M-479/4-C-840	561979	4
WU-M-479/4-C-850	561986	4
WU-M-479/8-C-830	561993	8
WU-M-479/8-C-840	562000	8
WU-M-479/8-C-850	562007	8
WU-M-479/16-C-830	562014	16
WU-M-479/16-C-840	562021	16
WU-M-479/16-C-850	562028	16
WU-M-475-C-830	561904	16
WU-M-475-C-840	561909	16
WU-M-475-C-850	561914	16




WU-M-479/4




WU-M-479/8

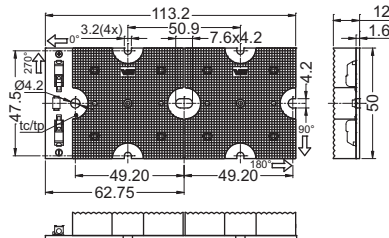

WU-M-479/16

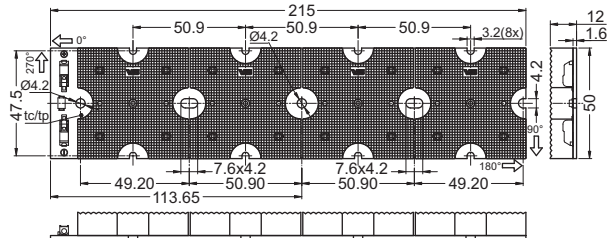

WU-M-475

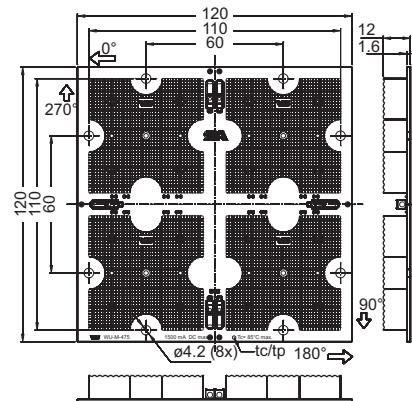

LED Industrial Light SYM I – Water Protected

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-425: 120x120x18.75 mm

WU-M-496: 240x120x62 mm

Encapsulated for outdoor applications with degree of protection: IP66/IK05

Pre-assembled leads:

2 leads: + (red); - (blue)

for luminaires of protection class II, length: 500 mm

Optics for hall lighting


Optimum illumination - installation ratio:

1:1 (height to distance) on the 0-180° layer (lengthwise) or 8:5 (height to distance) on the 90-270° layer (crosswise).




Reference numbers


Type	Ref. No.	Number of LEDs
WU-M-425-C-830	562034	16
WU-M-425-C-840	562041	16
WU-M-425-C-850	562048	16
WU-M-496-C-830	562088	32
WU-M-496-C-840	562098	32
WU-M-496-C-850	562108	32



WU-M-425

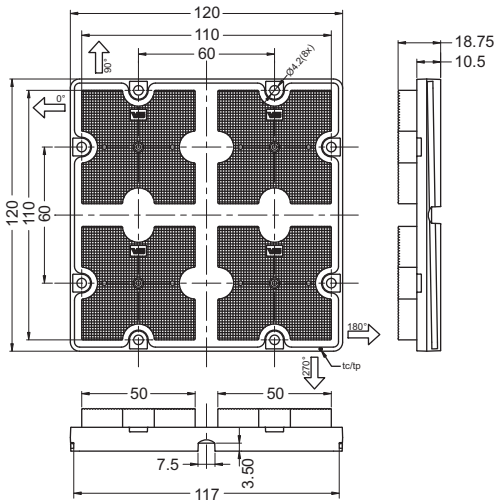

WU-M-496

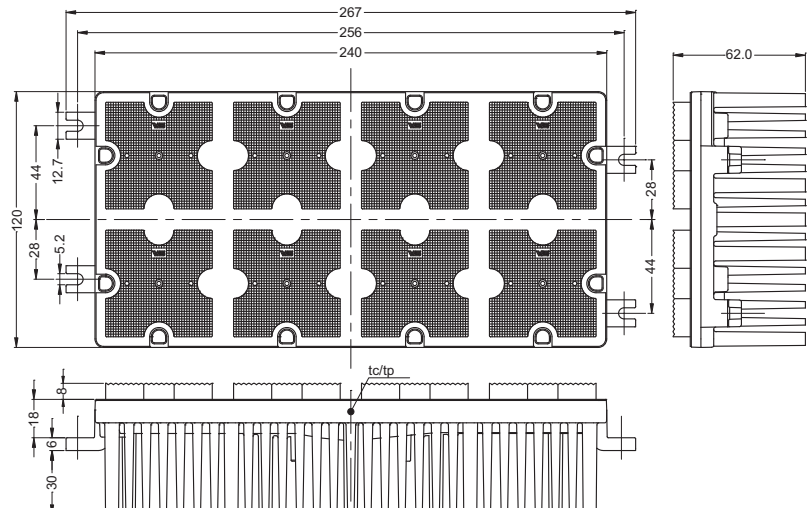

LED Industrial Light SYM II – Water Protected

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-425: 120x120x14 mm

WU-M-496: 240x120x54.6 mm

Encapsulated for outdoor applications

Pre-assembled leads:


2 leads: + (red); - (blue)

for luminaires of protection class II, length: 500 mm

Optics for hall lighting


Optimum illumination - installation ratio:

1:2 (height to distance)

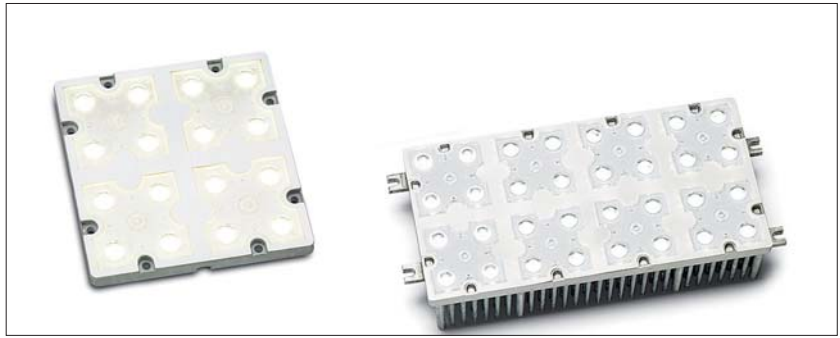


Reference numbers


Typ	Ref. No.	Number of LEDs	Degree of protection
With PMMA optics			
WU-M-425-C-830	562035	16	IP66/IK05
WU-M-425-C-840	562042	16	IP66/IK05
WU-M-425-C-850	562049	16	IP66/IK05
WU-M-496-C-830	562089	32	IP66/IK05
WU-M-496-C-840	562099	32	IP66/IK05
WU-M-496-C-850	562109	32	IP66/IK05
With silicone optics			
WU-M-425-C-830	562036	16	IP67/IP69/IK08
WU-M-425-C-840	562043	16	IP67/IP69/IK08
WU-M-425-C-850	562050	16	IP67/IP69/IK08
WU-M-496-C-830	562090	32	IP67/IP69/IK08
WU-M-496-C-840	562100	32	IP67/IP69/IK08
WU-M-496-C-850	562110	32	IP67/IP69/IK08



WU-M-425

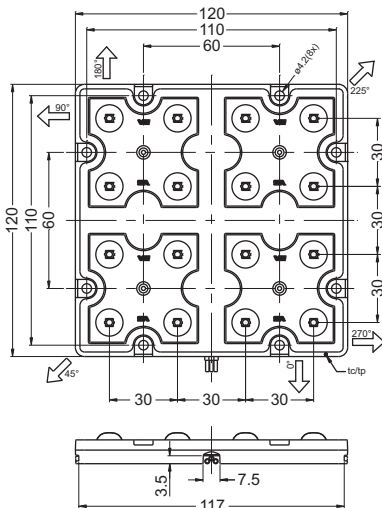

WU-M-496

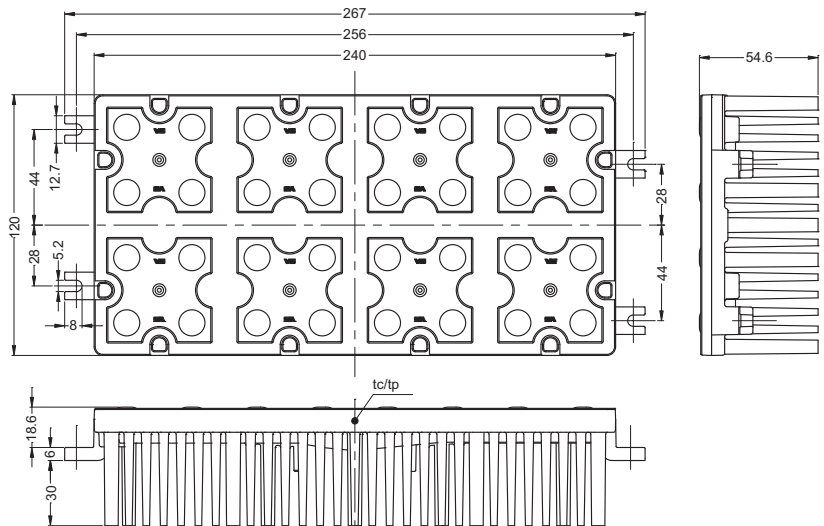


LUGA C 2016 – 3000 lm to 15,000 lm

Built-in lighting modules

LUGA C modules with lumen values ranging from 3000 to 15,000 lm are especially designed as a built-in module for industrial and outdoor lighting.

The wide range of variants (CRI 70/80) make them suitable for indoor as well as for street light applications.

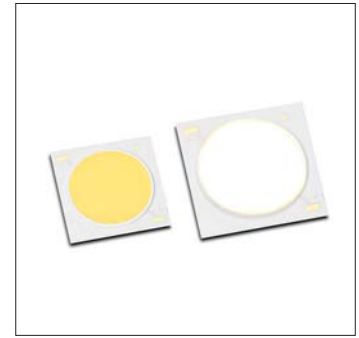

Technical notes

Dimensions

DMC12C/DMC18C: 28x28x1.7 mm

DMC18Q: 38x38x1.7 mm

Light emitting surface (LES)

DMC12C/DMC18C: Ø 22 mm

DMC18Q: Ø 33 mm

Typ. beam angle: 120°

Allowed operating temperature at t_c point:

-40 to max. 105 °C (at 700 mA)

Use of external LED constant current driver

Efficiency up to 184 lm/W

Colour rendering index R_a : > 80 / > 65

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Lumen maintenance L90/B10

DMC12C: 43,000 hrs. (I_F 1050 mA)

DMC18C: 44,000 hrs. (I_F 1050 mA)

DMC18Q: 54,000 hrs. (I_F 1050 mA)

Packaging unit:

100 pcs. (DMC12C/DMC18C)



75 pcs. (DMC18Q)

Typical applications


Integration in

- Reflector luminaires
- Flat surface-mounting luminaires
- Downlights
- Indoor and hall lighting
- Industrial lighting for:
 - Production halls
 - Warehouses
- Petrol station lighting
- Lighting for sports facilities
- Street and Outdoor lighting

DMC12C***F / DMC18C***F

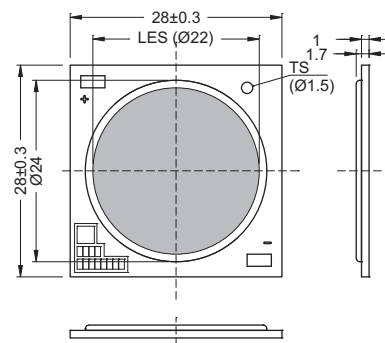


DMC18Q***F

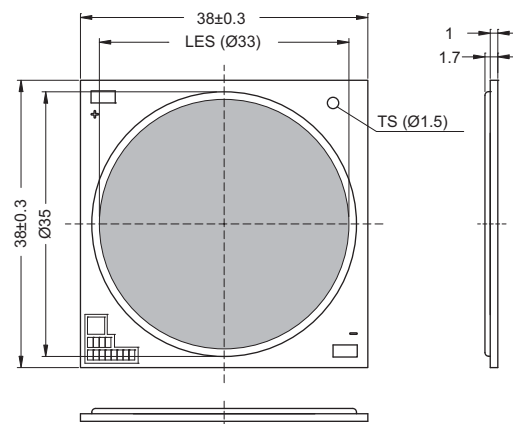

LUGA C 2016 – 3000 lm to 15,000 lm

Holder for LUGA C modules DMC12C and DMC18C
see page 53.

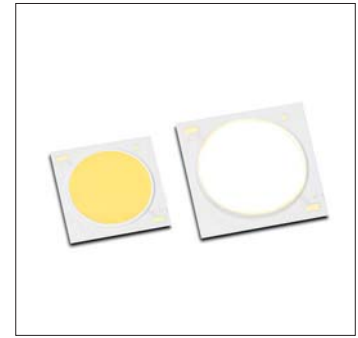

Type	Ref. No.	Colour	Correlated colour temp.* (K)	Typ. luminous flux and efficiency, typ. voltage (U _{typ.}) and power consumption (P _{el})**										Typ. CRI R _G	
				700 mA		1050 mA		1400 mA		1700 mA		2100 mA			
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
DMC12C***F				P _{el} = 23.4 W U _{typ.} = 33.4 V		P _{el} = 36.1 W U _{typ.} = 34.4 V		P _{el} = 49.1 W U _{typ.} = 35.1 V		P _{el} = 60.5 W U _{typ.} = 35.6 V					
DMC12CC27F	560425	warm white	2700	3260	139	4620	128	5810	118	6655	110	–	–	82	
DMC12CC30F	560426	warm white	3000	3535	151	5015	139	6305	128	7235	120	–	–	85	
DMC12CC30FB	560427	warm white	3000 (below BBL)	3330	142	4730	131	5950	121	6820	113	–	–	85	
DMC12CC35F	560428	neutral white	3500	3575	153	5065	140	6370	130	7300	121	–	–	85	
DMC12CC40F	560429	neutral white	4000	3645	156	5170	143	6495	132	7440	123	–	–	85	
DMC12CC50F	560430	cool white	5000	3715	159	5270	146	6615	135	7590	125	–	–	85	
DMC12CB40F	560431	neutral white	4000	3735	160	5300	147	6665	136	7645	126	–	–	70	
DMC12CB50F	560432	cool white	5000	3855	165	5465	151	6875	140	7880	130	–	–	70	
DMC18C***F				P _{el} = 35.1 W U _{typ.} = 50.2 V		P _{el} = 54.2 W U _{typ.} = 51.6 V		P _{el} = 73.7 W U _{typ.} = 52.6 V		P _{el} = 90.7 W U _{typ.} = 53.4 V					
DMC18CC27F	560433	warm white	2700	4775	136	6775	125	8475	115	9610	106	–	–	82	
DMC18CC30F	560434	warm white	3000	5180	148	7360	136	9195	125	10440	115	–	–	85	
DMC18CC30FB	560435	warm white	3000 (below BBL)	4890	139	6945	128	8680	118	9855	109	–	–	85	
DMC18CC35F	560436	neutral white	3500	5230	149	7425	137	9290	126	10535	116	–	–	85	
DMC18CC40F	560437	neutral white	4000	5345	152	7575	140	9470	128	10755	119	–	–	85	
DMC18CC50F	560438	cool white	5000	5445	155	7720	142	9660	131	10960	121	–	–	85	
DMC18CB40F	560439	neutral white	4000	5485	156	7780	144	9725	132	11025	122	–	–	70	
DMC18CB50F	560440	cool white	5000	5645	161	8020	148	10030	136	11365	125	–	–	70	
DMC18Q***F				P _{el} = 34 W U _{typ.} = 48.6 V		P _{el} = 52 W U _{typ.} = 49.5 V		P _{el} = 70.3 W U _{typ.} = 50.2 V		P _{el} = 86.3 W U _{typ.} = 50.7 V		P _{el} = 108 W U _{typ.} = 51.4 V			
DMC18QC27F	560441	warm white	2700	5275	155	7605	146	9770	139	11445	133	13370	124	82	
DMC18QC30F	560442	warm white	3000	5725	168	8255	159	10600	151	12425	144	14510	134	85	
DMC18QC30FB	560443	warm white	3000 (below BBL)	5400	159	7795	150	9995	142	11730	136	13690	127	85	
DMC18QC35F	560444	neutral white	3500	5790	170	8335	160	10700	152	12545	145	14660	136	85	
DMC18QC40F	560445	neutral white	4000	5900	174	8505	164	10920	155	12795	148	14950	138	85	
DMC18QC50F	560446	cool white	5000	6015	177	8665	167	11125	158	13035	151	15240	141	85	
DMC18QB40F	560447	neutral white	4000	6055	178	8730	168	11205	159	13135	152	15350	142	70	
DMC18QB50F	560448	cool white	5000	6250	184	9000	173	11555	164	13535	157	15820	146	70	

Emission data at t_p = 65 °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux and efficiency: ±15%; of voltage and power consumption: ±10% | Min. CRI R_G: > 80 / > 65

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12



Optics for LUGA C 2016 – 3000 lm to 15,000 lm

Silicone optics especially designed and optimized for the use of COB modules with LES sizes up to $\varnothing 23$ mm (e.g. LUGA C: DMC12C***F and DMC18C***F)
 Material: silicone
 Self sealing ability (IP65)

COB silicone optics M-Class (M1)

M-Class silicone optics
 Optical efficiency: 93%
 Optimum illumination - installation ratio:
 4:1 (pole distance to pole height)

Ref. No.: 559042

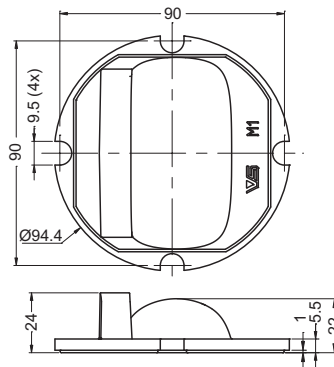


COB silicone optics Area*


Area silicone optics
 Optical efficiency: 95%
 Optimum illumination - installation ratio:
 4.5:1 (distance between luminaire poles to the height of the luminaire pole)

Ref. No.: on request

* Products under development; preliminary technical data



simulated LDC

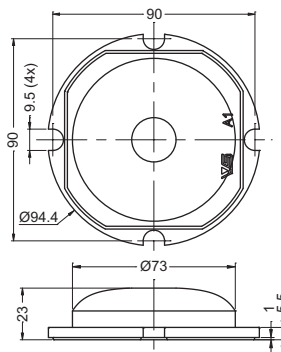


COB silicone optics SYM II*


SYM II silicone optics
 Optical efficiency: 95%
 Optimum illumination - installation ratio:
 2:1 (distance to height)

Ref. No.: on request

* Products under development; preliminary technical data




simulated LDC



Support for COB silicone optics

Material: PC, black

Ref. No.: 558607



LED Street and Outdoor Lighting – M-Class, S-Class, Area

These LED modules are suitable for standard-compliant street lighting, paths and squares in accordance with EN 13201.

These modules are designed for built-in into luminaire casings. They enable a modular luminaire design.

The VS ECXd 700/150 W LED driver enables power reduction via phase inversion.

The modules are available in four shapes (4, 8, 16 or 32 LEDs) and in three white colour tones.

Technical notes

LED built-in module for integration into luminaires

4, 8, 16 or 32 high-efficient High Power LEDs

Allowed operating temperature at t_c point
at $I_F = 700$ mA: -30 to 85 °C

Use of external LED constant current driver

Design for optimum thermal management

Efficiency up to 154 lm/W

Lumen maintenance L80/B10:

50,000 hrs. (I_F 1050 mA) at t_p 60 °C

Colour accuracy initially: 5 SDCM

ESD protection class 2

Surge protection: 4 kV (except WU-M-479)

Typical Applications

- Integration in luminaires
- Streetlighting for ME- and S-classes (acc. to EN 13201)
- Illumination of public places



1

2

3

4

5

6

7

8

9

10

11

12

LED Street and Outdoor Lighting – M-Class, S-Class, Area

Optical Characteristics

at $t_p = 60\text{ }^\circ\text{C}$

Type		Colour	Correlated colour temperature* K	Typ. luminous flux and efficiency, typical voltage ($U_{typ.}$) and power consumption (P_{el})**								CRI*** R_a	Photometric code
IP20	IP67 (IP66)			350 mA		700 mA		1050 mA		1400 mA			
				l_m	l_m/W	l_m	l_m/W	l_m	l_m/W	l_m	l_m/W		
4 LEDs				$P_{el} = 3.9\text{ W}$ $U_{typ.} = 11\text{ V}$		$P_{el} = 8.1\text{ W}$ $U_{typ.} = 11.5\text{ V}$		$P_{el} = 12.5\text{ W}$ $U_{typ.} = 11.9\text{ V}$		$P_{el} = 17.2\text{ W}$ $U_{typ.} = 12.3\text{ V}$			
WU-M-479/4-C-730	–	warm white	3000	545	141	1025	128	1450	116	1805	105	≥ 70	730 / 579
WU-M-479/4-C-740	–	neutral white	4000	580	151	1095	136	1545	123	1930	112	≥ 70	740 / 579
WU-M-479/4-C-650	–	cool white	5000	590	154	1120	139	1580	126	1970	114	≥ 65	650 / 579
8 LEDs				$P_{el} = 7.7\text{ W}$ $U_{typ.} = 21.9\text{ V}$		$P_{el} = 16.1\text{ W}$ $U_{typ.} = 23\text{ V}$		$P_{el} = 25.1\text{ W}$ $U_{typ.} = 23.9\text{ V}$		$P_{el} = 34.4\text{ W}$ $U_{typ.} = 24.6\text{ V}$			
WU-M-479/8-C-730	–	warm white	3000	1085	141	2055	128	2895	116	3615	105	≥ 70	730 / 579
WU-M-479/8-C-740	–	neutral white	4000	1160	151	2190	136	3090	123	3855	112	≥ 70	740 / 579
WU-M-479/8-C-650	–	cool white	5000	1185	154	2240	139	3160	126	3940	114	≥ 65	650 / 579
16 LEDs				$P_{el} = 15.4\text{ W}$ $U_{typ.} = 43.9\text{ V}$		$P_{el} = 32.2\text{ W}$ $U_{typ.} = 46\text{ V}$		$P_{el} = 50.1\text{ W}$ $U_{typ.} = 47.7\text{ V}$		$P_{el} = 68.9\text{ W}$ $U_{typ.} = 49.2\text{ V}$			
WU-M-475-C-730	WU-M-425-C-730	warm white	3000	2170	141	4105	128	5795	116	7230	105	≥ 70	730 / 579
WU-M-475-C-740	WU-M-425-C-740	neutral white	4000	2315	151	4380	136	6180	123	7715	112	≥ 70	740 / 579
WU-M-475-C-650	WU-M-425-C-650	cool white	5000	2370	154	4480	139	6320	126	7880	114	≥ 65	650 / 579
WU-M-479/16-C-730	–	warm white	3000	2170	141	4105	128	5795	116	7230	105	≥ 70	730 / 579
WU-M-479/16-C-740	–	neutral white	4000	2315	151	4380	136	6180	123	7715	112	≥ 70	740 / 579
WU-M-479/16-C-650	–	cool white	5000	2370	154	4480	139	6320	126	7880	114	≥ 65	650 / 579
32 LEDs				$P_{el} = 30.7\text{ W}$ $U_{typ.} = 87.7\text{ V}$		$P_{el} = 64.3\text{ W}$ $U_{typ.} = 91.9\text{ V}$		$P_{el} = 100.3\text{ W}$ $U_{typ.} = 95.5\text{ V}$		$P_{el} = 137.9\text{ W}$ $U_{typ.} = 98.5\text{ V}$			
–	WU-M-496-C-730	warm white	3000	4340	141	8210	128	11585	116	14455	105	≥ 70	730 / 579
–	WU-M-496-C-740	neutral white	4000	4635	151	8760	136	12365	123	15425	112	≥ 70	740 / 579
–	WU-M-496-C-650	cool white	5000	4735	154	8955	139	12635	126	15765	114	≥ 65	650 / 579

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes
The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.

** Production tolerance of voltage and power consumption: +10%/-4%; Measuring tolerance of luminous flux: $\pm 7\%$

*** Measuring tolerance of CRI: ± 2 | CRI > 80 on request

LED Roadway Light M-Class – IP20

Technical notes

Dimensions (incl. optics) LxWxH

- WU-M-479/4: 50x62.3x10.3 mm
- WU-M-479/8: 50x113.2x10.3 mm
- WU-M-479/16: 50x215x10.3 mm
- WU-M-475: 120x120x10.3 mm

Degree of protection: IP20

Push-in terminals (WAGO series 2060)


Optics for illumination of streets with M-Class (acc. to EN 13201)

Optimum illumination - installation ratio:
4.5:1 (distance between luminaire poles to the height of the luminaire pole)




Reference numbers


Type	Ref. No.		Number of LEDs
	lengthwise	crosswise	
WU-M-479/4-C-730	561967	561969	4
WU-M-479/4-C-740	561974	561976	4
WU-M-479/4-C-650	561981	561983	4
WU-M-479/8-C-730	561988	561990	8
WU-M-479/8-C-740	561955	561997	8
WU-M-479/8-C-650	562002	562004	8
WU-M-479/16-C-730	562009	562011	16
WU-M-479/16-C-740	562016	562018	16
WU-M-479/16-C-650	562023	562025	16
WU-M-475-C-730	561901	–	16
WU-M-475-C-740	561906	–	16
WU-M-475-C-650	561911	–	16




WU-M-475

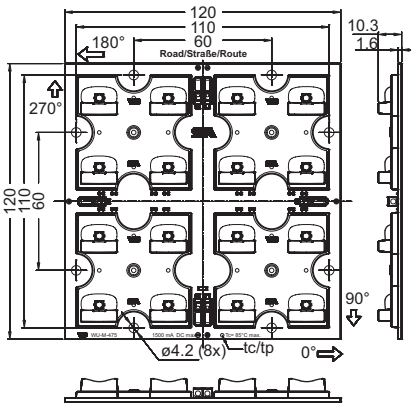


WU-M-479/4 – crosswise




WU-M-479/8 – crosswise

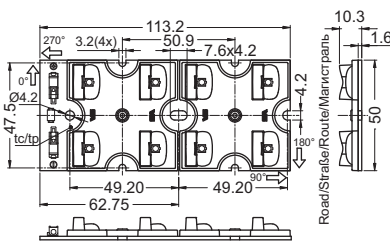


WU-M-479/16 – crosswise

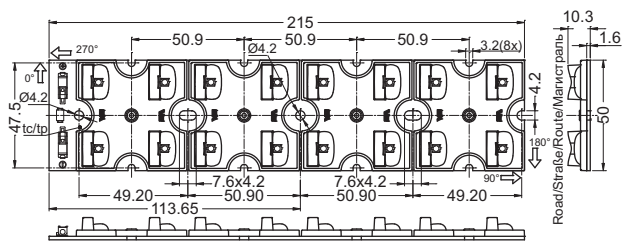


WU-M-479/4 – lengthwise



WU-M-479/8 – lengthwise

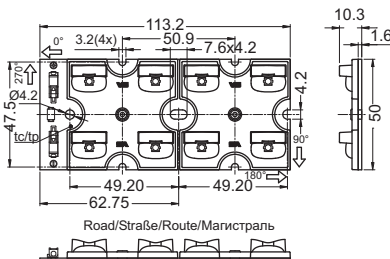

WU-M-479/16 – lengthwise

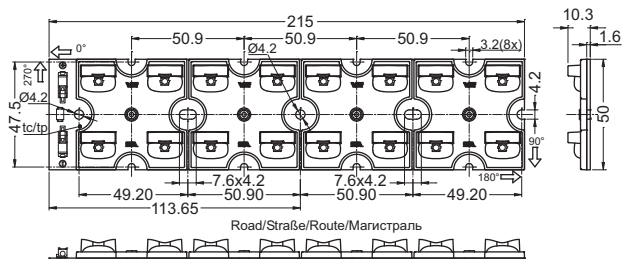

LED Roadway Light M-Class – Water Protected

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-425: 120x120x16 mm

WU-M-496: 240x120x61.7 mm

Encapsulated for outdoor applications

Pre-assembled leads:


2 leads: + (red); - (blue)

for luminaires of protection class II, length: 500 mm

Optics for illumination of streets with
M-Class (acc. to EN 13201)


Optimum illumination - installation ratio:

4.5:1 (distance between luminaire poles
to the height of the luminaire pole)

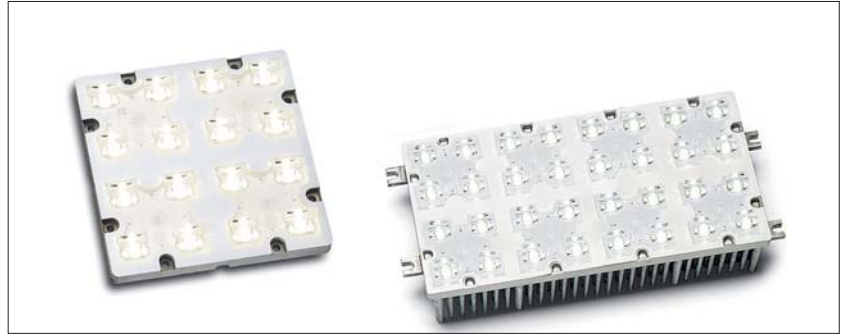


Reference numbers


Type	Ref. No.		Number	Degree of
Optics direction	lengthwise	crosswise	of LEDs	protection
With PMMA optics				
WU-M-425-C-730	562030	—	16	IP66/IK05
WU-M-425-C-740	562037	—	16	IP66/IK05
WU-M-425-C-650	562044	—	16	IP66/IK05
WU-M-496-C-730	562081	562082	32	IP66/IK05
WU-M-496-C-740	562091	562092	32	IP66/IK05
WU-M-496-C-650	562101	562102	32	IP66/IK05
With silicone optics				
WU-M-425-C-730	562032	—	16	IP67/IP69/IK08
WU-M-425-C-740	562039	—	16	IP67/IP69/IK08
WU-M-425-C-650	562046	—	16	IP67/IP69/IK08
WU-M-496-C-730	562083	562084	32	IP67/IP69/IK08
WU-M-496-C-740	562093	562094	32	IP67/IP69/IK08
WU-M-496-C-650	562103	562104	32	IP67/IP69/IK08




WU-M-425

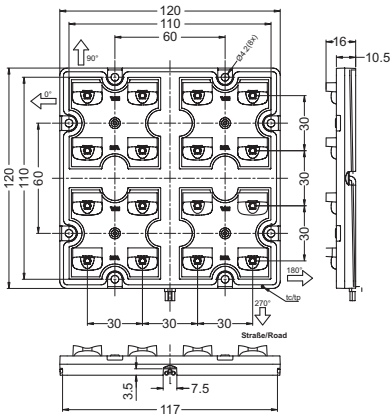

WU-M-496 M-Class – crosswise

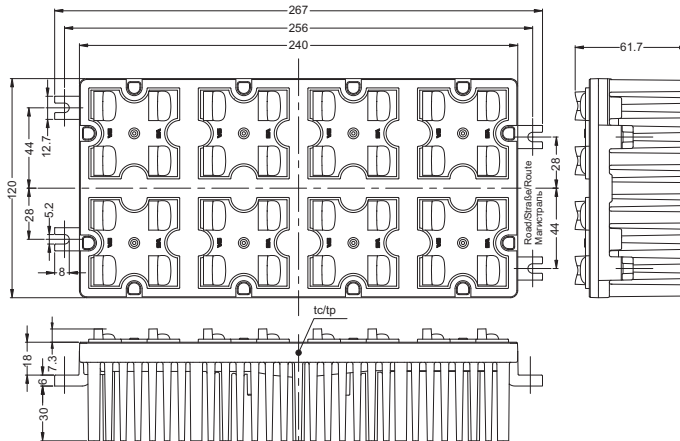

WU-M-496 M-Class – lengthwise

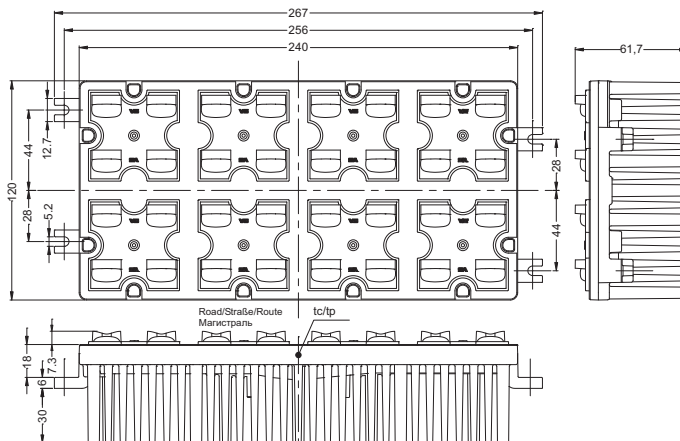

LED Roadway Light S-Class – IP20

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-479/4: 50x62.3x12.4 mm

WU-M-479/8: 50x113.2x12.4 mm

WU-M-479/16: 50x215x12.4 mm

WU-M-475: 120x120x12.4 mm

Degree of protection: IP20

Push-in terminals (WAGO series 2060)


Optics for illumination of streets with S-Class (acc. to EN 13201)

Optimum illumination - installation ratio: 7.5:1 (distance between luminaire poles to the height of the luminaire pole)




Reference numbers


Type	Ref. No.		Number of LEDs
	lengthwise	crosswise	
WU-M-479/4-C-730	561968	561970	4
WU-M-479/4-C-740	561975	561977	4
WU-M-479/4-C-650	561982	561984	4
WU-M-479/8-C-730	561989	561991	8
WU-M-479/8-C-740	561996	561998	8
WU-M-479/8-C-650	562003	562005	8
WU-M-479/16-C-730	562010	562012	16
WU-M-479/16-C-740	562017	562019	16
WU-M-479/16-C-650	562024	562026	16
WU-M-475-C-730	561902	—	16
WU-M-475-C-740	561859	—	16
WU-M-475-C-650	561912	—	16




WU-M-475

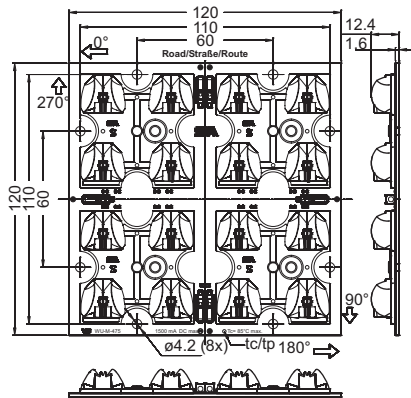


WU-M-479/4 – crosswise




WU-M-479/8 – crosswise

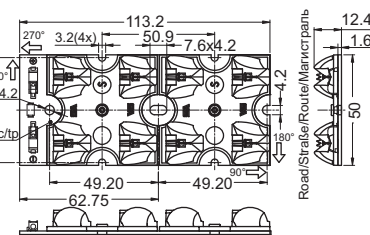


WU-M-479/16 – crosswise

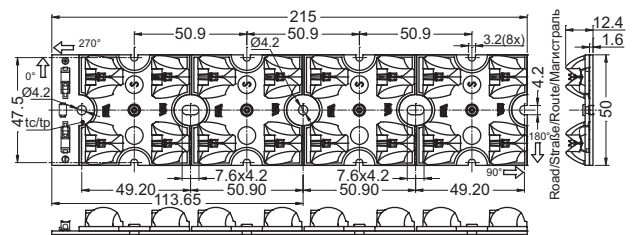


WU-M-479/4 – lengthwise



WU-M-479/8 – lengthwise

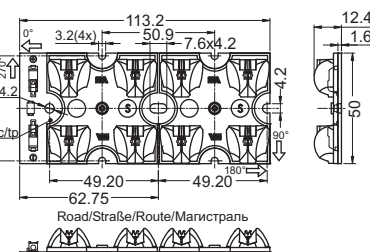

WU-M-479/16 – lengthwise

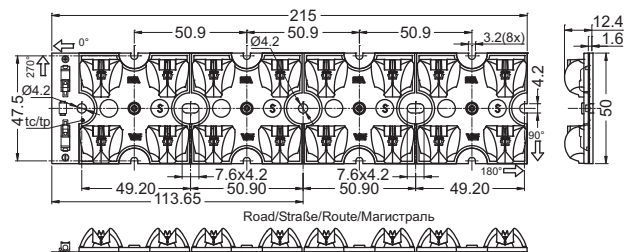

LED Roadway Light S-Class – Water Protected

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-425: 120x120x18.4 mm

WU-M-496: 240x120x61.3 mm

Encapsulated for outdoor applications with degree of protection: IP66/IK05

Pre-assembled leads:


2 leads: + (red); - (blue)

for luminaires of protection class II, length: 500 mm

Optics for illumination of streets with S-Class (acc. to EN 13201)


Optimum illumination - installation ratio: 7.5:1

(distance between luminaire poles to the height of the luminaire pole)

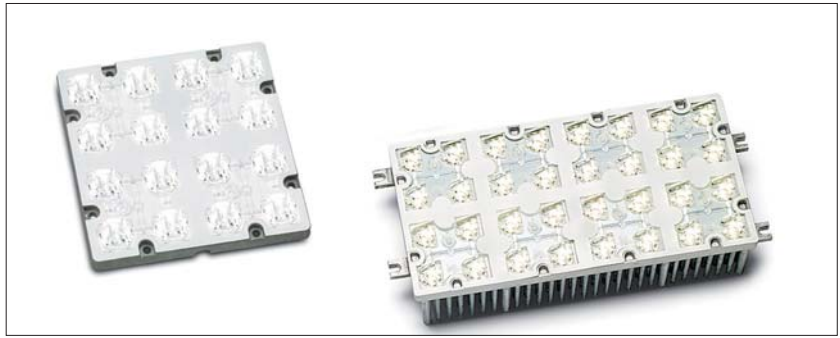


Reference numbers


Type	Ref. No.		Number of LEDs
	lengthwise	crosswise	
WU-M-425-C-730	562031	—	16
WU-M-425-C-740	562038	—	16
WU-M-425-C-650	562045	—	16
WU-M-496-C-730	562085	562086	32
WU-M-496-C-740	562095	562096	32
WU-M-496-C-650	562105	562106	32




WU-M-425

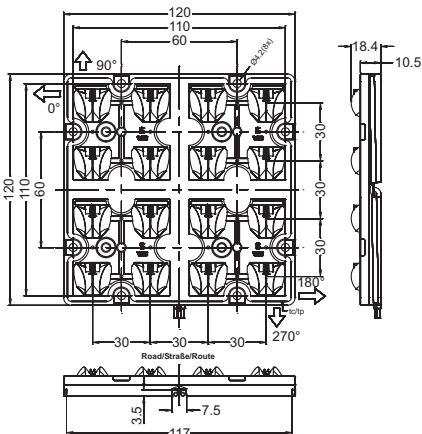

WU-M-496 S-Class – crosswise

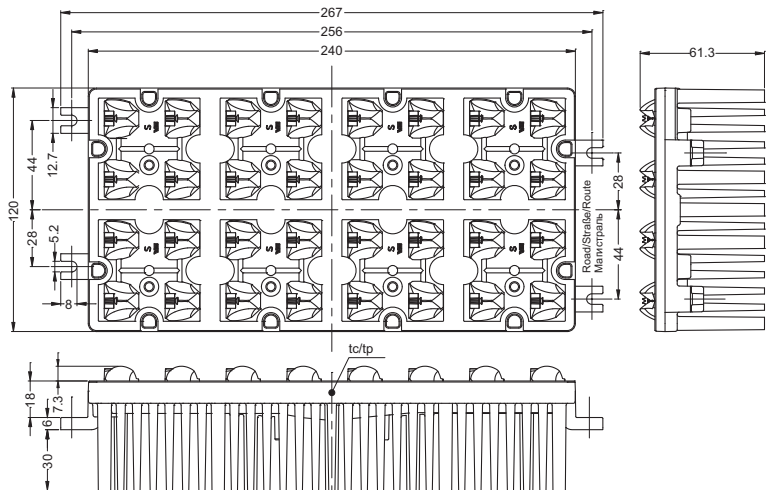

WU-M-496 S-Class – lengthwise

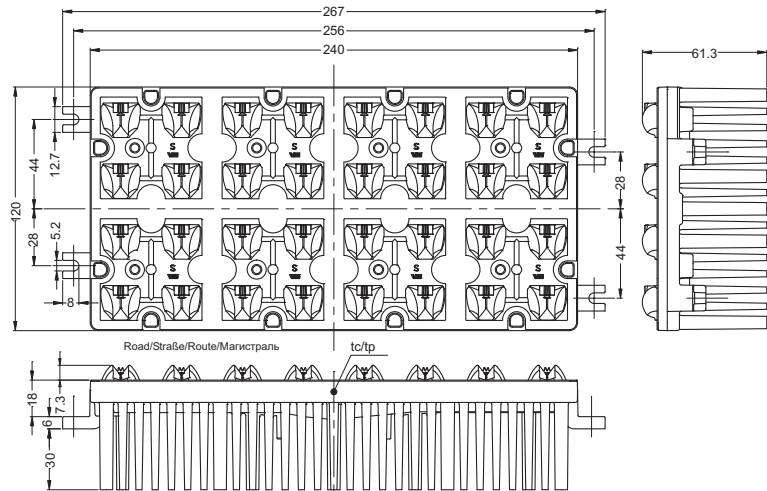

LED Roadway Light Area – IP20

Technical notes

Dimensions (incl. optics) LxWxH

WU-M-479/4: 50x62.3x6.7 mm

WU-M-479/8: 50x113.2x6.7 mm

WU-M-479/16: 50x215x6.7 mm

WU-M-475: 120x120x6.7 mm

Degree of protection: IP20

Push-in terminals (WAGO series 2060)

Optics for illumination of public places


Optimum illumination - installation ratio:

5.5:1 (distance between luminaire poles to the height of the luminaire pole)




Reference numbers


Type	Ref. No.	Number of LEDs
WU-M-479/4-C-730	561971	4
WU-M-479/4-C-740	561978	4
WU-M-479/4-C-650	561985	4
WU-M-479/8-C-730	561992	8
WU-M-479/8-C-740	561999	8
WU-M-479/8-C-650	562006	8
WU-M-479/16-C-730	562013	16
WU-M-479/16-C-740	562020	16
WU-M-479/16-C-650	562027	16
WU-M-475-C-730	561903	16
WU-M-475-C-740	561860	16
WU-M-475-C-650	561913	16




WU-M-475

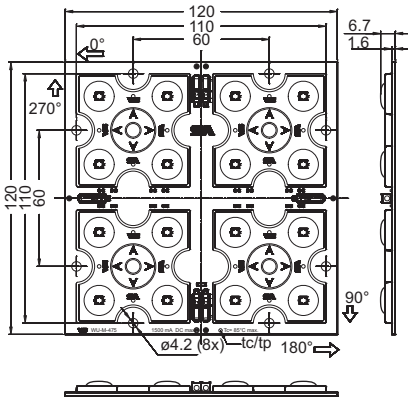


WU-M-479/4



WU-M-479/8

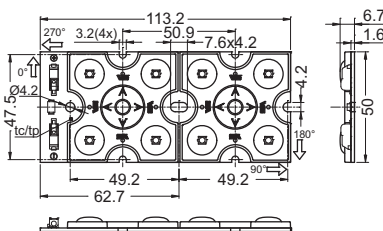

WU-M-479/16

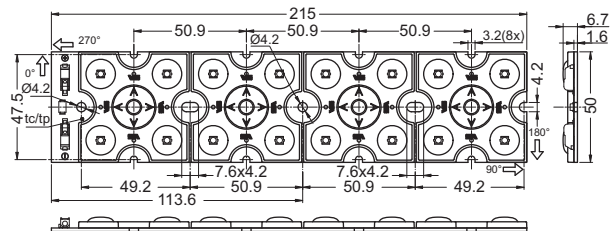

PowerEmitter XP and XML

Built-in PCB lighting modules

Thanks to the use of highly efficient LEDs, PowerEmitter modules guarantee an extremely high lumen output of up to 731 lm at max. 1050 mA.

The modules can be safely operated with various constant-current converters (350 mA, 500 mA, 700 mA, 1050 mA). Sufficient cooling must be ensured.

Cables have to be soldered onto the solder pads of PowerEmitter modules, which are available in white, neutral white and warm white, to enable terminal connections to be made. The colours of red, green and blue can be made available on request.

To enable the creation of unique light solutions, VS provides PowerOptics attachments with a variety of beam angle characteristics (see pages 78-80).

Technical notes

PCB diameter: 30 mm

Allowed operating temperature at t_c point:

-20 to 60 °C for PowerEmitter XP

-20 to 65 °C for PowerEmitter XML


Use of external LED constant current driver FR4-PCB with thermal ducts (PowerEmitter XP) or aluminium PCB (PowerEmitter XML) for optimum thermal management

Efficiency up to 132 lm/W

Colour rendering index: white $R_a = 75$, warm white $R_a = 80$


ESD protection class 2

Minimum order quantity: 144 pcs.

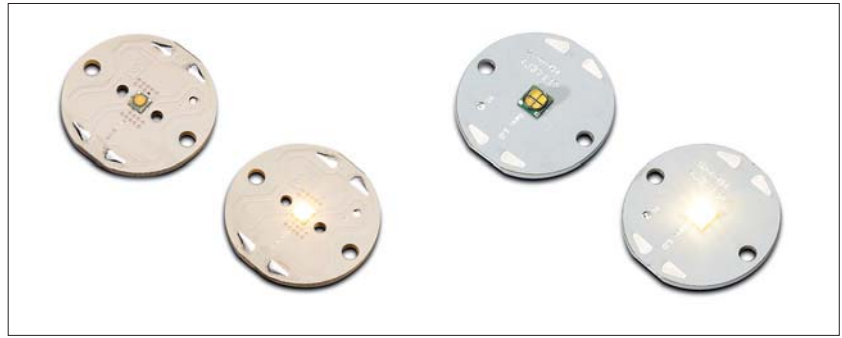


Typical applications

- Integration in luminaires
- Architectural lighting
- Marking paths, stairs, etc.
- Furniture lighting
- Light advertising
- Entertainment, retail lighting

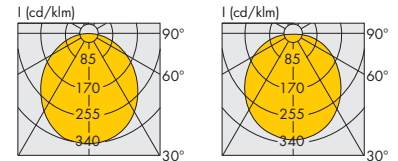

XP-C


XP-E

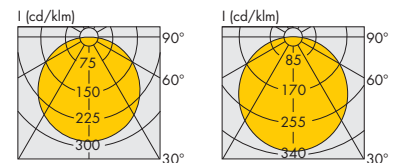


XP-G

XML

PowerEmitter XP



PowerEmitter XML



PowerEmitter XP

Type	Ref. No.	Colour	Correlated colour temperature* K	Luminous flux* (lm), voltage (U) and power consumption (P_{el})								Beam angle °	
				350 mA		500 mA		700 mA		1050 mA			
				min.	typ.	min.	typ.	min.	typ.	min.	typ.		
PowerEmitter XP-C				$P_{el} = 1.19-1.37$ W $U = 3.4-3.9$ V		$P_{el} = 1.75-2$ W $U = 3.5-4$ V							
WU-M-421-XP-C-WW	546676	warm white	2870...3200	67.2	80.6	87.4	104.8	-	-	-	-	110	
WU-M-421-XP-C-NW	546671	neutral white	3700...4260	73.9	87.4	96.1	113.6	-	-	-	-	110	
WU-M-421-XP-C-CW	546673	cool white	5650...6950	100.0	114.0	130.0	148.2	-	-	-	-	110	
PowerEmitter XP-E				$P_{el} = 1.12-1.37$ W $U = 3.2-3.9$ V		$P_{el} = 1.65-2$ W $U = 3.3-4$ V		$P_{el} = 2.38-2.87$ W $U = 3.4-4.1$ V					
WU-M-421-XP-E-WW	546684	warm white	2870...3200	80.6	93.9	104.8	122.1	137.0	159.6	-	-	115	
WU-M-421-XP-E-NW	546685	neutral white	3700...4260	93.9	107.0	122.1	139.1	159.6	181.9	-	-	115	
WU-M-421-XP-E-CW	546680	cool white	5650...6950	107.0	122.0	139.1	158.6	181.9	207.4	-	-	115	
PowerEmitter XP-G				$P_{el} = 1.05-1.31$ W $U = 3-3.75$ V		$P_{el} = 1.55-1.93$ W $U = 3.1-3.85$ V		$P_{el} = 2.24-2.77$ W $U = 3.2-3.95$ V		$P_{el} = 3.47-4.25$ W $U = 3.3-4.05$ V			
WU-M-421-XP-G-WW	546688	warm white	2870...3200	100.0	114.0	140.0	159.6	180.0	205.2	250.0	250.0	125	
WU-M-421-XP-G-NW	546687	neutral white	3700...4260	107.0	122.0	149.8	170.8	192.6	219.6	267.5	267.5	125	
WU-M-421-XP-G-CW	546686	cool white	5300...7050	122.0	139.0	170.8	194.6	219.6	250.2	305.0	347.5	125	

Emission data at $t_i = 25$ °C | * Production tolerance of luminous flux: $\pm 7\%$ | Suitable thermal tapes for these LED modules see page 82.

PowerEmitter XML

Type	Ref. No.	Colour	Correlated colour temperature* K	Luminous flux* (lm), voltage (U) and power consumption (P _{el})								Beam angle °	
				350 mA		500 mA		700 mA		1050 mA			
				min.	typ.	min.	typ.	min.	typ.	min.	typ.		
PowerEmitter XML				P _{el} = 4-4.4 W U = 11.5-12.5 V		P _{el} = 6-6.5 W U = 12-13 V		P _{el} = 8.7-9.45 W U = 12.4-13.5 V		P _{el} = 12.7-14 W U = 12.7-14 V			
WU-M-424-27K	548032	warm white	2650...2790	260	300	325	375	442	510	560	645	115	
WU-M-424-30K	548031	warm white	2950...3125	280	320	350	400	476	544	602	688	115	
WU-M-424-40K	548030	neutral white	3835...4110	300	340	375	425	510	578	645	731	115	

Emission data at $t_j = 85\text{ °C}$ | * Production tolerance of luminous flux: $\pm 7\%$ | Suitable thermal tapes for these LED modules see page 82.

TriplePowerEmitter XP

Built-in PCB lighting modules

Thanks to the use of highly efficient LEDs, TriplePowerEmitter modules guarantee an extremely high lumen output of up to 622 lm at max. 700 mA.

The modules can be safely operated with various constant-current drivers (350 mA, 500 mA or 700 mA). Sufficient cooling must be ensured.

The TriplePowerEmitter modules are available in white, neutral white and warm white.

The modules are available without an optical attachment or with a fixed 10°, 20°, 30° or 40° optical attachment to enable the creation of different lighting scenes.

Technical notes

PCB diameter: 45 mm

Allowed operating temperature at t_c point:

-20 to 65 °C

Use of external LED constant current driver

Aluminium PCB for optimum thermal management

Efficiency up to 109 lm/W

Colour rendering index:

white $R_a = 75$, warm white $R_a = 80$


ESD protection class 2

Minimum order quantity: 120 pcs.




Typical applications

- Integration in luminaires
- Architectural lighting
- Marking paths, stairs, etc.
- Furniture lighting
- Light advertising
- Entertainment, retail lighting

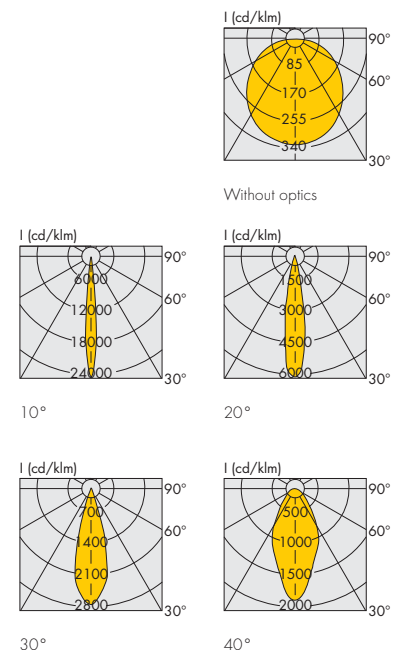


TriplePowerEmitter XP

Module without optics

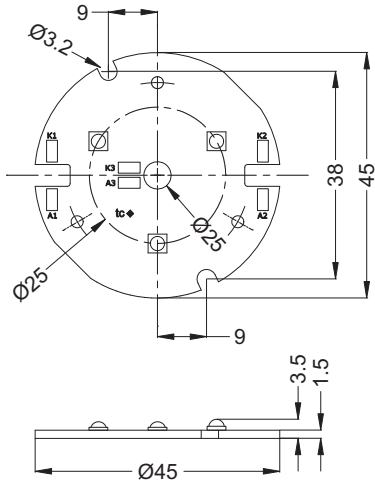

Module with optics

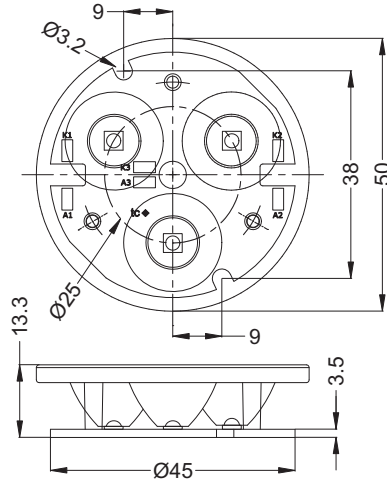

Type	Ref. No.	Colour	Correlated colour temperature	Luminous flux* (lm), voltage (U) and power consumption (P _{el})						Beam angle
				350 mA		500 mA		700 mA		
				P _{el} = 3.36-4.1 W		P _{el} = 4.95-6 W		P _{el} = 7.14-8.61 W		°
				U = 9.6-11.7 V		U = 9.9-12 V		U = 10.2-12.3 V		
				min.	typ.	min.	typ.	min.	typ.	
Without optics										
WU-M-422-XPE-VWV	546733	warm white	2870...3200	242	282	314	366	411	479	115
WU-M-422-XPE-NWV	546727	neutral white	3700...4260	282	321	366	417	479	546	115
WU-M-422-XPE-CWV	546729	cool white	5650...6950	321	366	417	476	546	622	115
TriplePowerEmitter XP 10°										
WU-M-422-XPE-VWV-10°	546741	warm white	2870...3200	218	254	283	330	370	431	10
WU-M-422-XPE-NWV-10°	546736	neutral white	3700...4260	254	289	330	376	431	491	10
WU-M-422-XPE-CWV-10°	546735	cool white	5650...6950	289	329	376	428	491	560	10
TriplePowerEmitter XP 20°										
WU-M-422-XPE-VWV-20°	546749	warm white	2870...3200	218	254	283	330	370	431	20
WU-M-422-XPE-NWV-20°	546750	neutral white	3700...4260	254	289	330	376	431	491	20
WU-M-422-XPE-CWV-20°	546748	cool white	5650...6950	289	329	376	428	491	560	20
TriplePowerEmitter XP 30°										
WU-M-422-XPE-VWV-30°	548090	warm white	2870...3200	218	254	283	330	370	431	30
WU-M-422-XPE-NWV-30°	548089	neutral white	3700...4260	254	289	330	376	431	491	30
WU-M-422-XPE-CWV-30°	548088	cool white	5650...6950	289	329	376	428	491	560	30
TriplePowerEmitter XP 40°										
WU-M-422-XPE-VWV-40°	546757	warm white	2870...3200	218	254	283	330	370	431	40
WU-M-422-XPE-NWV-40°	546756	neutral white	3700...4260	254	289	330	376	431	491	40
WU-M-422-XPE-CWV-40°	546755	cool white	5650...6950	289	329	376	428	491	560	40

Emission data at $t_j = 25\text{ °C}$ | * Production tolerance of luminous flux: $\pm 7\%$ | Suitable thermal tapes for these LED modules see page 82.


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

PowerOptics3 for XP/XT Modules


PowerOptics3 were specially developed to supplement VS PowerEmitter making it possible for users to put unique lighting solutions into practice. Use of high-grade optical PMMA enables high efficiency factors of up to 90%.

To guarantee easy mounting on PowerEmitter module, the PowerOptics3 are backed with self-adhesive tape. However, depending on the type of application and ambient conditions, the PowerOptics3 module may require additional fixing to ensure secure mounting.


For fixation of PowerOptics3 on Star LED modules use self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F.

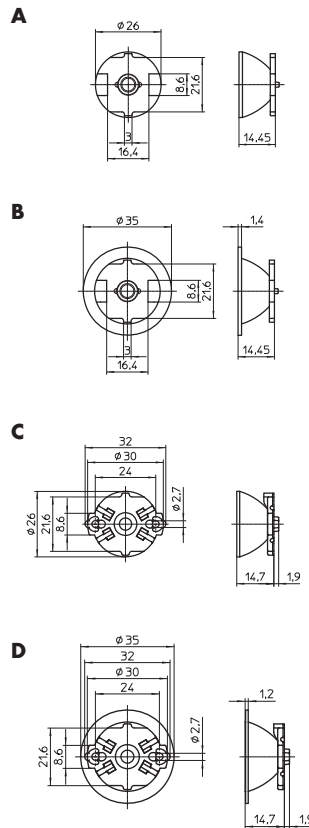


Light distribution curves PowerOptics3




8°



26°



16°



45°

Type	Beam angle* °	Ref. No.	Drawing	Dimensions* (mm) diameter/module height	Ref. No.	Drawing	Dimensions* (mm) diameter/module height
Optics Ø 26 mm – For VS PowerEmitter XP				Optics Ø 35 mm – For VS PowerEmitter XP			
PowerOptics3	8	547716	A	26/14.6	548868	B	35/14.6
PowerOptics3	16	547717	A	26/14.6	548869	B	35/14.6
PowerOptics3	26	547718	A	26/14.6	548870	B	35/14.6
PowerOptics3	45	547719	A	26/14.6	548871	B	35/14.6
Optics Ø 26 mm – For Star XP / XT				Optics Ø 35 mm – For Star XP / XT			
PowerOptics3	8	550967	C	26/14.6	550971	D	35/14.6
PowerOptics3	16	550968	C	26/14.6	550972	D	35/14.6
PowerOptics3	26	550969	C	26/14.6	550973	D	35/14.6
PowerOptics3	45	550970	C	26/14.6	550974	D	35/14.6

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes. The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.

PowerOptics for XP Modules

Various attachable optics are available for XP modules to enable different beam characteristics and illumination levels.


PowerOptics are made of PMMA, a material of high optical efficiency, and therefore achieve efficiencies of up to 92%.

The optics are available in various beam angles and are easily attached to the modules using self-adhesive tape. Depending on the type of application or the expected ambient conditions, it may be necessary to supplement this method of fastening to ensure the optics are securely mounted.



PowerOptics XP

Light distribution curves

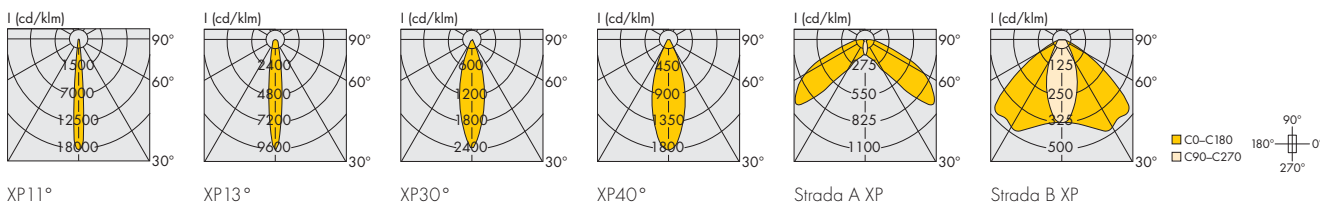

Type	Ref. No.	Beam angle* °	Dimensions* (mm) diameter x height / width x depth x height
Optics for LED modules of XP series			
PowerOptics XP 11°	543422	11	16.1 x 10.1
PowerOptics XP 13° diff	543423	12	16.1 x 10.1
PowerOptics XP 30°	543424	30	16.1 x 10.1
PowerOptics XP 40°	543425	40	16.1 x 10.1
PowerOpticsStrada A XP	544036	100 x 20	19.6 x 15.4 x 10.5
PowerOpticsStrada B XP	544038	116 x 44	20 x 15.5 x 5.3

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes. The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.

PowerOptics for XP Modules

For TriplePowerEmitter and Spot modules



Various attachable optics are available for TriplePowerEmitter and the Spot modules of the XP series to enable different beam characteristics and illumination levels.

PowerOptics are made of PMMA, a material of high optical efficiency, and therefore achieve efficiencies of up to 92%


Fixing

PowerOptics 3 XP: with glue


PowerOptics 4 XP: by self tapping screw 2.9 mm x H
(H = 6.8 mm + A + B)

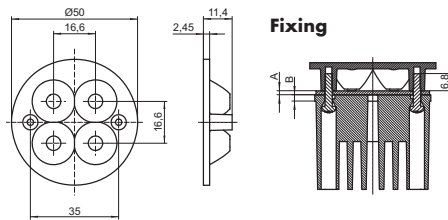

Light distribution curves PowerOptics 3XP

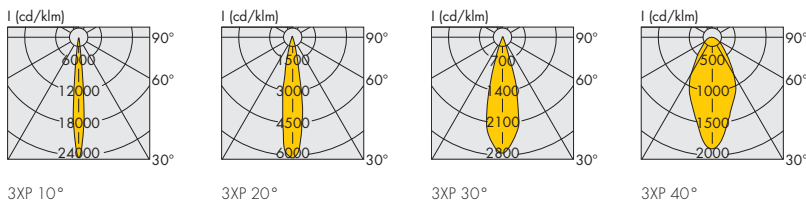

Light distribution curves PowerOptics 4XP

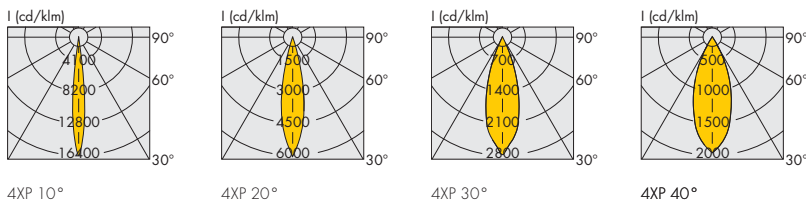

Type	Ref. No.	Beam angle* °	Dimensions* (mm) diameter x height
Optics for TriplePowerEmitter XP modules			
PowerOptics 3XP 10°	547591	10	50 x 11.6
PowerOptics 3XP 20°	547589	20	50 x 11.6
PowerOptics 3XP 30°	547587	30	50 x 11.6
PowerOptics 3XP 40°	547510	40	50 x 11.6
Optics for Spot XP modules			
PowerOptics 4XP 10°	547592	10	50 x 11.4
PowerOptics 4XP 20°	547590	20	50 x 11.4
PowerOptics 4XP 30°	547588	30	50 x 11.4
PowerOptics 4XP 40°	547511	40	50 x 11.4

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes
The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.

Reflectors for PowerEmitter XP modules

Reflectors generate a high efficiency, round spot with homogeneous light distribution


Material: PC, with reflective aluminium coating

The reflectors are available in two beam angles and are easily attached to the modules using self-adhesive tape.

Depending on the type of application or the expected ambient conditions, it may be necessary to supplement this method of fastening to ensure the reflectors are securely mounted.

Ref. No.: 548781 20°

Ref. No.: 546370 45°



1

2

3

4

5

Heat Sinks for LED Modules XP and XML

Under no circumstances may heat sinks ever be covered by insulation material or similar. Air ventilation must be ensured.

Heat sinks for PowerEmitter XP and XML modules

For LED modules with one XP LED up to 700 mA

For LED modules with one XML LED up to 350 mA

Material: thermoconductive resin

Dimensions: (Ø x depth):

32.4x20 mm / 48x12.8 mm

Fixing: with screws



Weight: 16.4 g

Packaging unit: 250 pcs.

Ref. No.: 548739 Drawing/photo A

Ref. No.: 544804 Drawing/photo B



A



6

7

B



8

9

Heat sink for TriplePowerEmitter XP

For LED modules up to 700 mA

Material: thermoconductive resin


Dimensions (Ø x depth): 46x37.5 mm

Fixing: with screws

Weight: 51 g

Packaging unit: 225 pcs.

Ref. No.: 544805




10

11

12

Thermally Conductive Adhesive Transfer Tapes for LED Modules

3M™ type 8810 and Bergquist Bond-Ply® 100

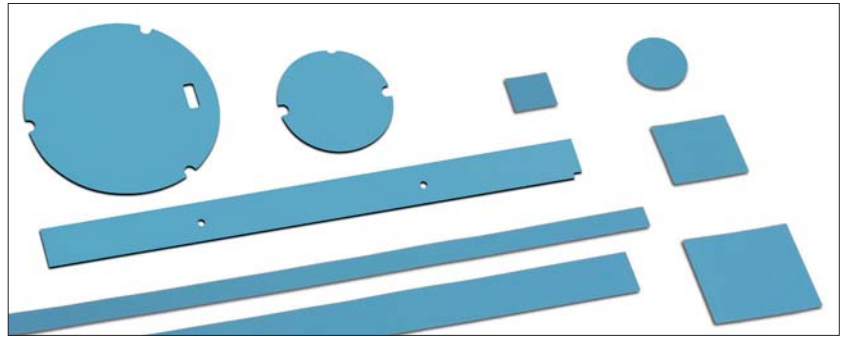

Thermally Conductive Adhesive Transfer Tapes are designed to provide a preferential heat-transfer path between heat-generating components and heat-sinks or other cooling devices.

These tapes are tacky pressure sensitive adhesives loaded with thermally conductive ceramic fillers that do not require a heat cure cycle to form an excellent bond to many substrates. Only pressure is needed to form an excellent bond and thermal interface.

The specialised chemistry renders them modestly soft and able to wet to many surfaces, allowing them to conform well to non-flat substrates, provide high adhesion, and act as a good thermal interface.

The specialised acrylic chemistry of the tapes provides for excellent thermal stability of the base polymer. The thermally conductive tapes are provided on a silicone treated polyester release liner for ease of handling and die cutting. The tapes offer excellent adhesive performance with good wetting and flow onto many substrate surfaces.

For detailed information and application guidelines see 3M or Bergquist datasheet for thermally conductive adhesive transfer taper (8805; 8810; 8815; 8820; www.3m.com or Bergquist Bond-Ply® 100; www.bergquistcompany.com).

Depending on the type of application and/or the expected ambient conditions, the modules must be additionally secured to ensure optimum fixing.

Type	Ref. No.	Size mm	Tape thickness mm	Liner thickness μm	Thermal conductive R_{th} K/W	For VS LED modules	Catalogue page
Round							
Adhesive pad $\varnothing 28$	536248	$\varnothing 28$	0.25	37.5 - 30	1.0	PowerEmitter	75-76
Adhesive pad $\varnothing 43$	536977	$\varnothing 43$	0.20	76	0.5	TriplePowerEmitter $\varnothing 45$ mm, $\varnothing 50$ mm	76-77
Square							
Adhesive pad 49x49	529157	49x49	0.25	37.5-50	0.3	TriplePowerEmitter $\varnothing 50$ mm	76-77
Linear							
Adhesive pad 278x13	548179	278x13	0.25	35.5-50	0.3	LUGA Line	10-12
Adhesive pad 320x35	533815	320x35	0.20	76	0.1	LEDLine High Power	-

This technical information for 3M™ Thermally Conductive Adhesive Transfer Tape 8810 or Bergquist Bond-Ply® 100 should be considered representative or typical only and should not be used for specification purposes.

Type	Ref. No.	Size mm	Thermal conductive R_{th} K/W	For VS LED modules	Catalogue page
For LED modules WU-M-425 (ME/S, SYM I, SYM II)					
Thermal conductive tape, adhesive on one side	548252	54x54	≤ 0.04	WU-M-425	61, 63, 70, 72, 74



LED MODULES FOR MAINS VOLTAGE

DRIVER-ON-BOARD TECHNOLOGY



READYLINE MODULES

LED modules for direct connection to mains voltage

With so-called Driver-on-Board technology (DoB), the control gear unit is directly integrated into the LED module, which permits direct connection to mains voltage (220-240 V, 50-60 Hz).

The built-in LED modules of the ReadyLine series are suitable for residential and furniture lighting, as a replacement for compact fluorescent downlights and for installation in reflector luminaires.

The range includes both COB as well as SMD modules in various colour temperatures from 2700 K to 5000 K, in square or round designs (of varying diameters), with or without a heat sink as well as with pre-attached leads with and without connectors. Many products are available with cover for protection against electrical contact. Built-in spots and MR16 built-in modules are also available.

Advantages at a glance:

- Direct connection to mains voltage
- More flexible space-saving luminaire designs due to absence of driver
- Direct replacement for conventional lamps in existing luminaires
- High power factor: > 0.9
- Long service life: up to 50,000 hours



LED Modules ReadyLine COB

Built-in LED modules with integrated driver for mains voltage

Technical Notes

Mains voltage: 220-240 V, 50/60 Hz

Power factor: > 0.95

Dimensions (ØxH): 57x4.7 mm

Light emitting surface (LES)

Ø 14 mm: 10 W, 15 W, 20 W


Ø 21 mm: 30 W, 40 W

Aluminium PCB for optimum thermal management

Beam angle: 120°

On-board push-in terminals

Packaging unit: 100 pcs.

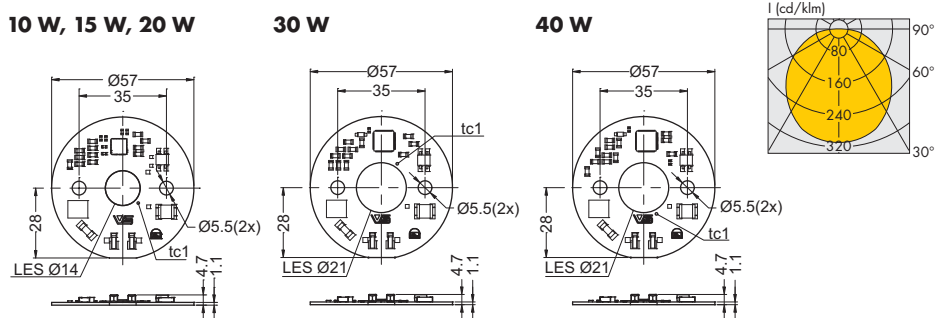

Typical Applications

- Residential lighting
- Replacement for CFL downlights
- Integration in reflector luminaires
- Furniture lighting

Typ. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Colour	Correlated colour temperature* K	Luminous flux (lm) and typ. efficiency** (lm/W)			Typ. beam angle °	Typ. CRI R _a	Energy efficiency
						min. lm	typ. lm	typ. lm/W			
10	EDC57C_10W827_230A	559771	220-240	warm white	2700	780	850	85	120	80	A+
	EDC57C_10W830_230A	559772	220-240	warm white	3000	830	900	90	120	80	A+
	EDC57C_10W835_230A	559773	220-240	warm white	3500	880	930	93	120	80	A+
	EDC57C_10W840_230A	559774	220-240	neutral white	4000	910	950	95	120	80	A+
	EDC57C_10W850_230A	559775	220-240	cool white	5000	930	1000	100	120	80	A+
15	EDC57C_15W827_230A	559776	220-240	warm white	2700	1170	1275	85	120	80	A+
	EDC57C_15W830_230A	559777	220-240	warm white	3000	1245	1350	90	120	80	A+
	EDC57C_15W835_230A	559778	220-240	warm white	3500	1290	1395	93	120	80	A+
	EDC57C_15W840_230A	559779	220-240	neutral white	4000	1320	1425	95	120	80	A+
	EDC57C_15W850_230A	559780	220-240	cool white	5000	1395	1500	100	120	80	A+
20	EDC57C_20W827_230A	559781	220-240	warm white	2700	1560	1700	85	120	80	A+
	EDC57C_20W830_230A	559782	220-240	warm white	3000	1660	1800	90	120	80	A+
	EDC57C_20W835_230A	559783	220-240	warm white	3500	1720	1860	93	120	80	A+
	EDC57C_20W840_230A	559784	220-240	neutral white	4000	1760	1900	95	120	80	A+
	EDC57C_20W850_230A	559785	220-240	cool white	5000	1860	2000	100	120	80	A+
30***	EDC57C_30W827_230A	560985	220-240	warm white	2700	2340	2550	85	120	80	A+
	EDC57C_30W830_230A	560986	220-240	warm white	3000	2490	2700	90	120	80	A+
	EDC57C_30W835_230A	560987	220-240	warm white	3500	2571	2781	93	120	80	A+
	EDC57C_30W840_230A	560988	220-240	neutral white	4000	2625	2835	95	120	80	A+
	EDC57C_30W850_230A	560989	220-240	cool white	5000	2747	2957	99	120	80	A+
40***	EDC57C_40W827_230A	560990	220-240	warm white	2700	3120	3400	85	120	80	A+
	EDC57C_40W830_230A	560991	220-240	warm white	3000	3320	3600	90	120	80	A+
	EDC57C_40W835_230A	560992	220-240	warm white	3500	3428	3708	93	120	80	A+
	EDC57C_40W840_230A	560993	220-240	neutral white	4000	3500	3780	95	120	80	A+
	EDC57C_40W850_230A	560994	220-240	cool white	5000	3662	3942	99	120	80	A+

* Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux and efficiency: ±10% | CRI: ±3 | *** Preliminary data


LED Modules ReadyLine COB – Accessories

Holder

Dimensions (ØxH): 59.8x6.6 mm

Material: plastic, white

Ref. No.: 559786



Holder for EVO reflectors

For COB Type EDC57C

For reflectors see page 119


Cover for LES: PC, transparent

Dimensions (ØxH): 60x14.65 mm

Material: PC, inner ring: metallized

Packaging unit: 72 pcs.

Ref. No.: 561847




Thermal pad

Dimensions (ØxH): 63x0.5 mm

Thermal conductivity R_{th} : 2 W/mK

Ref. No.: 559883



1

2

3

4

5

6

7

8

9

10

11


12

LEDSpot ReadyLine IP


Complete LEDSpot equipped with optics, heat sink, leads and metal frame

Technical notes


- Mains voltage: 220-240 V, 50/60 Hz
- Power factor: > 0.95
- Metal frame, round
- Heat sink material: thermoconductive resin
- For cut-out: Ø 56 mm
- Lens with clear glass
- Beam angle: 50°
- With leads: Cu tinned, stranded conductors 0.5 mm², double FEP/FEP-insulation
- MOV - metal-oxide varistor, enclosed
- Protection class II
- RFI suppressed
- Degree of protection: IP54/IP20
- Packaging unit: 45 pcs.



IP20

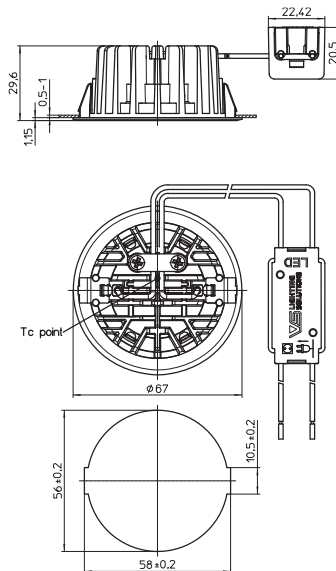

IP54

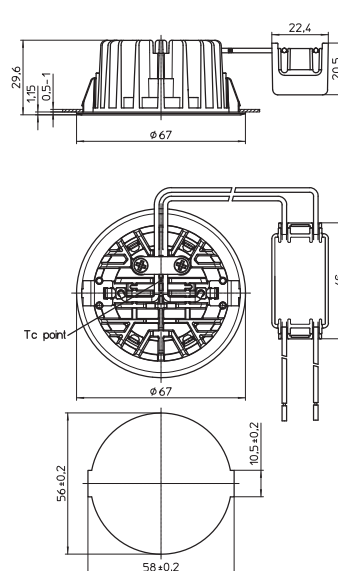



Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Luminous flux lm		Light intensity Candela	Beam angle °	CRI R _a	Frame colour	Energy efficiency
							min.	typ.					
Degree of protection: IP54													
4.3	LCH024	554956	220-240	12	warm white	2900...3200	350	370	330	50	> 80	silver	A++
	LCH024	554957			white								
	LCH024	554958	220-240	12	neutral white	3700...4200	380	400	350	50	> 80	silver	A++
	LCH024	554959			white								
Degree of protection: IP20													
4.3	LCH025	555016	220-240	12	warm white	2900...3200	350	370	330	50	> 80	silver	A++
	LCH025	555017			white								
	LCH025	555019	220-240	12	neutral white	3700...4200	380	400	350	50	> 80	silver	A++
	LCH025	555020			white								

LEDSpot ReadyLine MR16

Complete LEDSpot equipped with optics,
heat sink and leads

Technical notes

Mains voltage: 220-240 V, 50/60 Hz
 Power factor: > 0.95
 Lens diameter: 50 mm
 Beam angle: 42°
 Heat sink material: aluminium
 Leads: Cu tinned, stranded conductors 0.5 mm²,
 double FEP/FEP-insulation, length: 300 mm
 MOV - metal-oxide varistor, enclosed unassembled
 Protection class II
 RFI suppressed
 Packaging unit: 30 pcs.

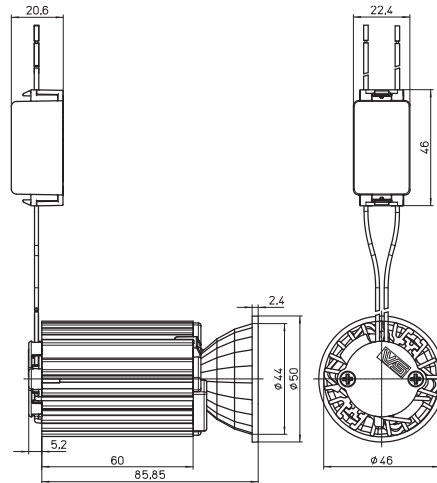

Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Luminous flux lm		Light intensity Candela	Beam angle °	CRI R _a	Energy efficiency
							min.	typ.				
8.7	LR8W	554960	220-240	8	warm white	2900...3200	515	600	636	42	> 80	A+
	LR8W	554961			neutral white	3700...4200	580	670	680			A+

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

LED Modules ReadyLine S

Built-in LED modules with integrated driver for direct connection to mains voltage

Technical notes

Mains voltage: 220-240 V, 50/60 Hz

Power factor: > 0.97

Dimensions:

with heat sink 155x41x32.8 mm

without heat sink 132x37.4x9.25 mm

Aluminium PCB for optimum thermal management

Heat sink made of thermoconductive resin

Protection cover: PC, UV-glued

or rivetted (module with heat sink)

Push-in terminals with push-button:

0.2-0.75 mm² (24-18AWG)

Fixation for modules

with heat sink: fixing holes for screws M4

or self-tapping screws 3.9

with cover: fixing holes for screws M3

or self-tapping screws 2.9

For luminaires of protection class II

(More information see page 229)


RFI suppressed

Weight: 35/140 g (without/with heat sink)


Packaging unit: 80/40 pcs. (without/with heat sink)



With heat sink

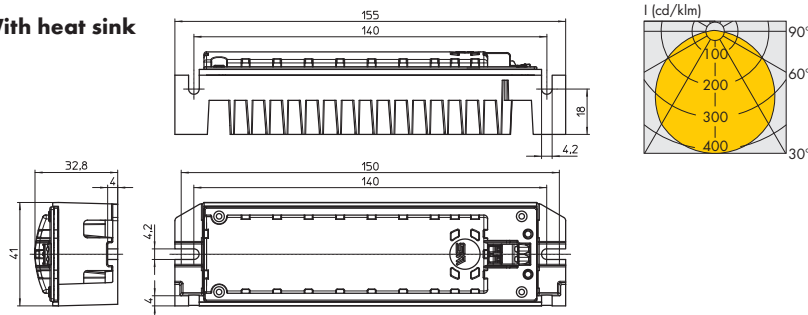

Without heat sink

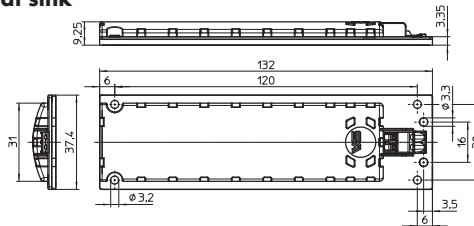

Typical applications

- Replacement for compact fluorescent lamps
- Integration in luminaires
- Residential lighting
- Architectural lighting
- Retail lighting
- Furniture lighting

Max. output W	Type	Ref. No.		Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Energy efficiency
		with heat sink	without heat sink						min.	typ.		
8.7	LUT33	559522	559526	220-240	21	warm white	2600...2900	clear	590	650	> 80	A+
	LUT33	559523	559527						diffuse	480	530	> 80
	LUT33	550439	550441	220-240	21	warm white	2900...3200	clear	720	780	> 80	A+
	LUT33	551983	551989						diffuse	610	660	> 80
	LUT33	551984	551990	220-240	21	neutral white	3700...4200	clear	740	800	> 80	A+
	LUT33	551985	551991						diffuse	630	680	> 80
13	LUT33	559524	559030	220-240	30	warm white	2600...2900	clear	910	940	> 80	A+
	LUT33	559525	559528						diffuse	780	800	> 80
	LUT33	550438	550440	220-240	30	warm white	2900...3200	clear	1100	1190	> 80	A+
	LUT33	551986	551992						diffuse	935	1010	> 80
	LUT33	551987	551993	220-240	30	neutral white	3700...4200	clear	1140	1210	> 80	A+
	LUT33	551988	551994						diffuse	955	1030	> 80

Accessories		Description	Tape thickness	Thermal conductivity	Breakdown voltage*
-	-	552039 Cord grip with 2 screws for LED modules with heat sink	-	-	-
-	-	555009 Thermally conductive adhesive transfer tape 132x38 mm	0.25 mm	0.8 W/mK	5.5 kV
-	-	553427 Thermally conductive transfer tape, non-adhesive 136x36 mm	0.25 mm	2 W/mK	3 kV
-	-	555008** Thermally conductive transfer tape, adhesive on both sides 136x42 mm	0.19 mm	0.9 W/mK	10.3 kV

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

LED Modules ReadyLine S IP54

Built-in LED modules with integrated driver for direct connection to mains voltage

Technical notes

Mains voltage: 220-240 V, 50/60 Hz

Power factor: > 0.97

Dimensions:

with heat sink 155x41x34.25 mm

without heat sink 132x37.4x10.5 mm

Aluminium PCB for optimum thermal management

Heat sink made of thermoconductive resin

Protection cover: PC, UV-glued

or rivetted (module with heat sink)

Leads: Cu tinned, stranded conductors 0.5 mm²,

double FEP/FEP-insulation, length: 300 mm

Fixation for modules

with heat sink: fixing holes for screws M4

or self-tapping screws 3.9

with cover: fixing holes for screws M3

or self-tapping screws 2.9

For luminaires of protection class II

(More information see page 229)

Degree of protection: IP54

RFI suppressed

Weight: 35/140 g (without/with heat sink)


Packaging unit: 80/40 pcs. (without/with heat sink)

Typical applications


- Replacement for compact fluorescent lamps
- Integration in luminaires
- Residential lighting
- Architectural lighting
- Retail lighting
- Furniture lighting



With heat sink

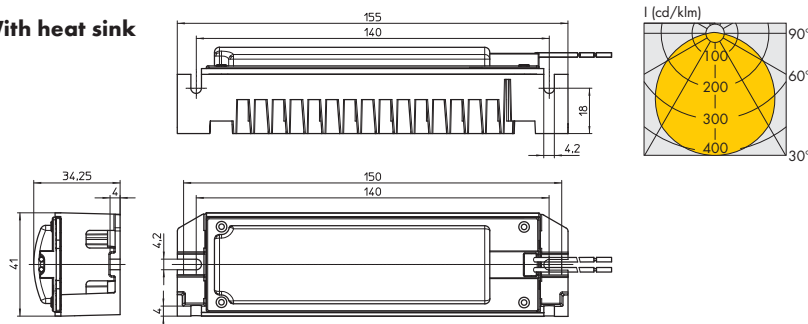

Without heat sink

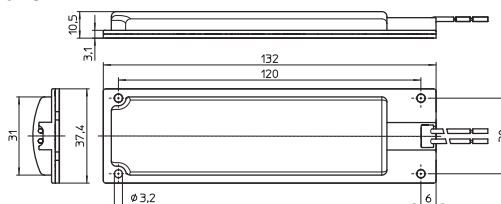

Max. output W	Type	Ref. No.		Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Energy efficiency
		with heat sink	without heat sink						min.	typ.		
8.7	LUT33	559529	559533	220-240	21	warm white	2600...2900	clear	590	650	> 80	A+
	LUT33	559530	559534						diffuse	480	530	> 80
	LUT33	556749	556741	220-240	21	warm white	2900...3200	clear	720	780	> 80	A+
	LUT33	556750	556742						diffuse	610	660	> 80
	LUT33	556751	556743	220-240	21	neutral white	3700...4200	clear	740	800	> 80	A+
	LUT33	556752	556744						diffuse	630	680	> 80
13	LUT33	559531	559535	220-240	30	warm white	2600...2900	clear	910	940	> 80	A+
	LUT33	559532	559536						diffuse	780	800	> 80
	LUT33	555875	556745	220-240	30	warm white	2900...3200	clear	1100	1190	> 80	A+
	LUT33	556753	556746						diffuse	935	1010	> 80
	LUT33	556755	556747	220-240	30	neutral white	3700...4200	clear	1140	1210	> 80	A+
	LUT33	556756	556748						diffuse	955	1030	> 80

Accessories		Description	Tape thickness	Thermal conductivity	Breakdown voltage*
-	-	552039 Cord grip with 2 screws for LED modules with heat sink	-	-	-
-	-	555009 Thermally conductive adhesive transfer tape 132x38 mm	0.25 mm	0.8 W/mK	5.5 kV
-	-	553427 Thermally conductive transfer tape, non-adhesive 136x36 mm	0.25 mm	2 W/mK	3 kV
-	-	555008** Thermally conductive transfer tape, adhesive on both sides 136x42 mm	0.19 mm	0.9 W/mK	10.3 kV

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

LED Modules ReadyLine DL 160

Built-in LED modules with integrated driver for direct connection to mains voltage

Technical notes

Mains voltage: 220-240 V, 50-60 Hz

Power factor: > 0.9

Dimensions: Ø 164 mm

Allowed operating temperature at t_c point:


-25 to 80 °C

Ambient temperature range t_a : -25 to 65 °C

Lumen maintenance L70/B50:


55,000 hrs. at t_p 80 °C

Packaging unit: 36 pcs.



Typical applications

- Downlights
- Replacement for compact fluorescent lamps

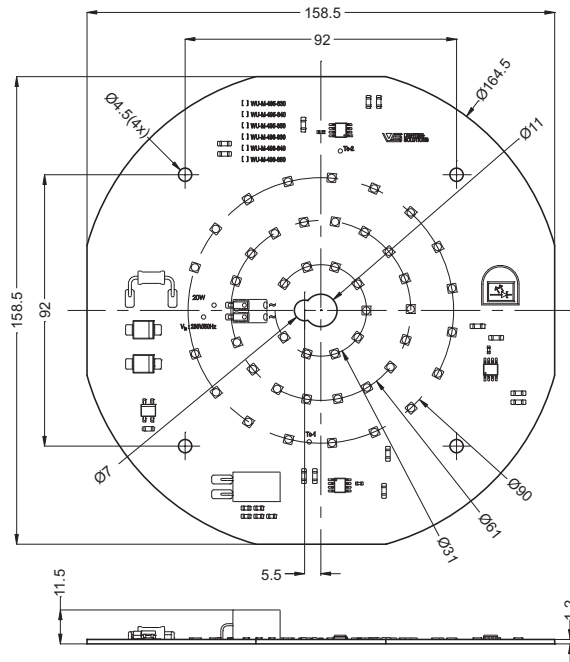

Typ. output W	Type	Ref. No.	Voltage AC 50-60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature (K)	Typ. luminous flux and efficiency*		Typ. beam angle (°)	Typ. CRI R _a	Energy efficiency
							lm	lm/W			
20	WU-M-498-830	557252	220-240	44	warm white	3000	2000	100	120	80	A+
	WU-M-498-840	557253	220-240	44	neutral white	4000	2200	110	120	80	A++
	WU-M-498-850	557254	220-240	44	cool white	5000	2500	125	120	80	A++

* Production tolerance of luminous flux and efficiency: ±1.5%

LED Modules ReadyLine DL 250

Built-in LED modules with integrated driver for direct connection to mains voltage

Technical notes

Mains voltage: 220-240 V, 50-60 Hz

Power factor: > 0.9

Dimensions: Ø 250 mm

Lumen maintenance L70/B50:




55,000 hrs. at t_p 80 °C

Version for emergency lighting

Separate LED circuit of 8 LEDs for operation with local emergency lighting driver.

Typical applications

- Downlights
- Replacement for compact fluorescent lamps

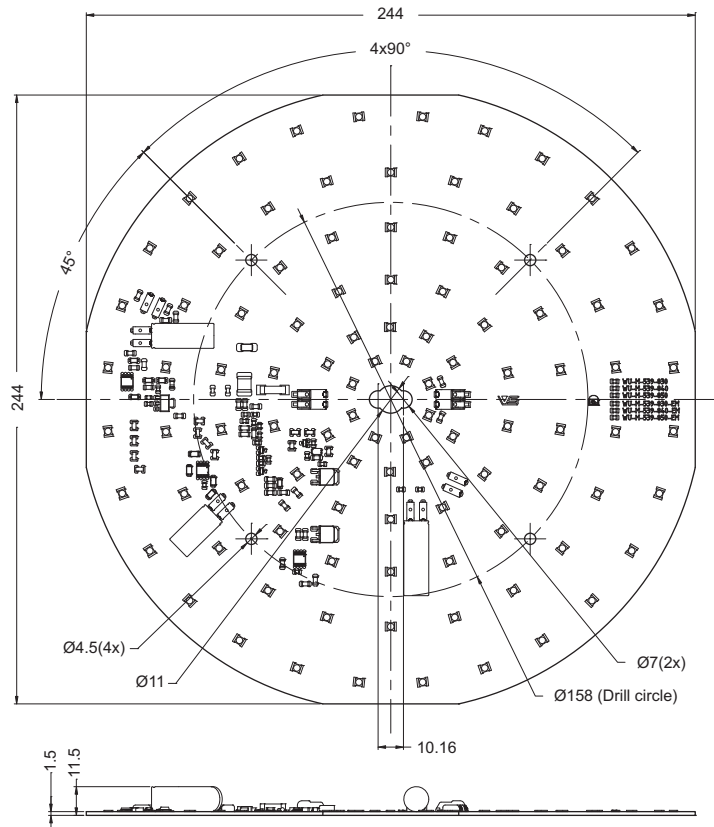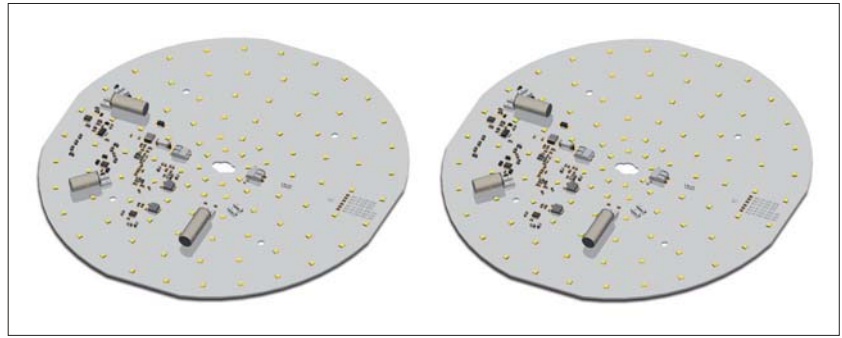

Products under development; preliminary technical datas

Typ. output W	Type	Ref. No.	Voltage AC 50-60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature (K)	Typ. luminous flux and efficiency*		Typ. beam angle (°)	Typ. CRI R_a	Energy efficiency
							lm	lm/W			
30	WU-M-539-830	562163	220-240	92	warm white	3000	3300	109	120	80	A+
	WU-M-539-840	562164	220-240	92	neutral white	4000	3500	113	120	80	A+
	WU-M-539-850	562165	220-240	92	cool white	5000	3500	113	120	80	A+

ReadyLine DL – For emergency lighting

30	WU-M-539-830-EM	561882	220-240	92	warm white	3000	3300	109	120	80	A+
	WU-M-539-840-EM	561883	220-240	92	neutral white	4000	3500	113	120	80	A+
	WU-M-539-850-EM	562166	220-240	92	cool white	5000	3500	113	120	80	A+

* Production tolerance of luminous flux and efficiency: $\pm 15\%$

LED Modules ReadyLine C

Built-in LED modules with integrated driver for direct connection to mains voltage

Technical notes

Mains voltage: 220-240 V, 50/60 Hz

Aluminium PCB for optimum thermal management

Heat sink made of thermoconductive resin or co-moulded heat sink made of thermoconductive resin and aluminium

Protection cover: PC, UV-glued or rivetted (module with heat sink)

For luminaires of protection class II

(More information see page 229)

RFI suppressed

ReadyLine	Heat sink	Weight g	Packaging unit pcs.
C 10	with	210	28
	without	55	36
C 08	with	190	28
	without	40	36
C 07	with	190	48
	without	40	48
C 06	without	25	48
C 05	without	40	45
C 03	without	30	45

Typical applications

- Replacement for compact fluorescent lamps
- Integration in luminaires
- Residential lighting
- Architectural lighting
- Retail lighting
- Furniture lighting



ReadyLine C 10

Technical notes

Power factor: > 0.97

Dimensions: Ø 100 mm,

Ø 120 mm with heat sink


Screw terminals for LED module with heat sink:
2.5 mm²

Welded leads for LED module without heat sink:
double FEP/FEP-insulation, length: 300 mm,
central or lateral lead exit


Fixing holes for screws M3 or self-tapping screws 2.9





With central lead exit



With lateral lead exit



With heat sink, protection cover and 2-poles screw terminals



Max. output W	Type	Ref. No.		Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency
		with heat sink	without heat sink						min.	typ.			
10	LR54	559537	559539	220-240	54	warm white	2600...2900	clear	1010	1120	> 80	central	A++
	LR54	on request	559540									lateral	A++
	LR54	559538	559541	220-240	54	warm white	2600...2900	diffuse	890	950	> 80	central	A+
	LR54	on request	559542									lateral	A+
	LR54	554951	554943	220-240	54	warm white	2900...3200	clear	1100	1200	> 80	central	A++
	LR54	on request	554944									lateral	A++
	LR54	554952	554945	220-240	54	warm white	2900...3200	diffuse	935	1020	> 80	central	A+
	LR54	on request	554946									lateral	A+
	LR54	554953	554947	220-240	54	neutral white	3700...4200	clear	1150	1250	> 80	central	A++
	LR54	on request	554948									lateral	A++
LR54	554954	554949	220-240	54	neutral white	3700...4200	diffuse	980	1060	> 80	central	A+	
LR54	on request	554950									lateral	A+	
17.5	LR42	559543	559545	220-240	42	warm white	2600...2900	clear	1140	1330	> 80	central	A+
	LR42	on request	559546									lateral	A+
	LR42	559544	559547	220-240	42	warm white	2600...2900	diffuse	930	1100	> 80	central	A
	LR42	on request	559548									lateral	A
	LR42	553828	553820	220-240	42	warm white	2900...3200	clear	1440	1550	> 80	central	A+
	LR42	on request	553821									lateral	A+
	LR42	553829	553822	220-240	42	warm white	2900...3200	diffuse	1230	1340	> 80	central	A+
	LR42	on request	553823									lateral	A+
	LR42	553830	553824	220-240	42	neutral white	3700...4200	clear	1480	1590	> 80	central	A+
	LR42	on request	553825									lateral	A+
LR42	553831	553826	220-240	42	neutral white	3700...4200	diffuse	1260	1370	> 80	central	A+	
LR42	on request	553827									lateral	A+	

Accessories		Description	Tape thickness	Thermal conductivity	Breakdown voltage*
-	-	552039 Cord grip with 2 screws for LED modules with heat sink	-	-	-
-	-	555012 Thermally conductive adhesive transfer tape Ø 100 mm	0.25 mm	0.8 W/mK	5.5 kV
-	-	553981 Thermally conductive transfer tape, non-adhesive Ø 99 mm	0.25 mm	2 W/mK	3 kV
-	-	553795** Thermally conductive transfer tape, adhesive on both sides Ø 104 mm	0.19 mm	0.9 W/mK	10.3 kV

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

ReadyLine C 08

Technical notes

Power factor: > 0.97

Dimensions: Ø 81.5 mm,

Ø 120 mm with heat sink

Screw terminals for LED module with heat sink:


2.5 mm²

Welded leads for LED module without heat sink:


double FEP/FEP-insulation, length: 300 mm,

central or lateral lead exit


Fixing holes for screws M3 or self-tapping screws 2.9




With central lead exit



With lateral lead exit



With heat sink, protection cover and 2-poles screw terminals



Max. output W	Type	Ref. No.		Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency	
		with heat sink	without heat sink						min.	typ.				
13	LR30W	559550	559552	220-240	30	warm white	2600...2900	clear	910	940	> 80	central	A+	
	LR30W	on request	559553						lateral	A+				
	LR30W	559551	559554						diffuse	780		800	central	A
	LR30W	on request	559555						lateral	A				
	LR30W	557843	557834	220-240	30	warm white	2900...3200	clear	1100	1190	> 80	central	A+	
	LR30W	on request	557835						lateral	A+				
	LR30W	557844	557836						diffuse	935		1010	central	A+
	LR30W	on request	557837						lateral	A+				
LR30W	557845	557838	220-240	30	neutral white	3700...4200	clear	1140	1210	> 80	central	A+		
LR30W	on request	557839						lateral	A+					
LR30W	557846	557840						diffuse	955		1030	central	A+	
LR30W	on request	557841						lateral	A+					

Accessories		Description	Tape thickness	Thermal conductivity	Breakdown voltage*
-	-	557692 Thermally conductive transfer tape Ø 76 mm	0.25 mm	0.8 W/mK	5.5 kV
-	-	558229 Thermally conductive non-adhesive transfer tape Ø 76 mm	0.25 mm	2 W/mK	3 kV
-	-	557691 ** Thermally conductive transfer tape, adhesive on both sides Ø 82 mm	0.19 mm	0.9 W/mK	10.3 kV

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

ReadyLine C 07

Technical notes

Power factor: > 0.95

Dimensions: Ø 73.3 mm;


Ø 120 mm with heat sink

Screw terminals for LED module with heat sink:
2.5 mm²

Welded leads for LED module without heat sink:
double FEP/FEP-insulation, length: 300 mm,
central or lateral lead exit

Fixing holes for screws M3 or self-tapping screws 2.9




Versions for the US market on request



With central lead exit

With lateral lead exit

With heat sink, protection cover and 2-poles screw terminals

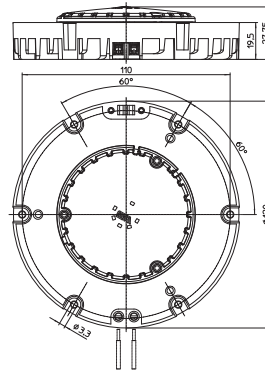

Max. output W	Type	Ref. No.		Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency								
		with heat sink	without heat sink						min.	typ.											
17.5	LR42	558025	556640	220-240	42	warm white	2600...2900	clear	1140	1330	> 80	central	A+								
	LR42	on request	559559									lateral	A+								
	LR42	559560	559563									220-240	42	warm white	2600...2900	diffuse	930	1100	> 80	central	A
	LR42	on request	559564																	lateral	A
	LR42	552019	550382									220-240	42	warm white	2900...3200	clear	1440	1550	> 80	central	A+
	LR42	on request	550958																	lateral	A+
	LR42	552020	552015									220-240	42	warm white	2900...3200	diffuse	1230	1340	> 80	central	A+
	LR42	on request	552016																	lateral	A+
	LR42	552021	551448									220-240	42	neutral white	3700...4200	clear	1480	1590	> 80	central	A+
	LR42	on request	550959																	lateral	A+
LR42	552022	552018	220-240	42	neutral white	3700...4200	diffuse	1260	1370	> 80	central	A+									
LR42	on request	552017									lateral	A+									


Accessories		Description	Tape thickness	Thermal conductivity	Breakdown voltage*
-	-	552039 Cord grip with 2 screws for LED modules with heat sink	-	-	-
-	-	551265 Thermally conductive adhesive transfer tape Ø 71 mm	0.25 mm	0.8 W/mK	5.5 kV
-	-	553422 Thermally conductive transfer tape, non-adhesive Ø 68 mm	0.25 mm	2 W/mK	3 kV
-	-	555010** Thermally conductive transfer tape, adhesive on both sides Ø 74 mm	0.19 mm	0.9 W/mK	10.3 kV

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

ReadyLine C 06

Technical notes

Power factor: > 0.95
 Dimensions: Ø 60 mm
 Welded leads: double FEP/FEP-insulation,
 length: 300 mm, lateral lead exit
 Fixing holes for screws M3



Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency
								min.	typ.			
8.7	LR12W	559565	220-240	12	warm white	2600...2900	clear	590	650	> 80	lateral	A+
	LR12W	559566					diffuse	480	530	> 80		A
	LR12W	559567	220-240	12	warm white	2900...3200	clear	720	780	> 80	lateral	A+
	LR12W	559568					diffuse	610	660	> 80		A+
	LR12W	559569	220-240	12	neutral white	3700...4200	clear	740	800	> 80	lateral	A+
	LR12W	559570					diffuse	630	680	> 80		A+
Accessories			Description				Tape thickness	Thermal conductivity	Breakdown voltage*			
-	-	559968	Thermally conductive adhesive transfer tape Ø 64 mm				0.25 mm	0.8 W/mK		5.5 kV		
-	-	559969	Thermally conductive transfer tape, non-adhesive Ø 59 mm				0.25 mm	2 W/mK		3 kV		
-	-	559970**	Thermally conductive transfer tape, adhesive on both sides Ø 64 mm				0.19 mm	0.9 W/mK		10.3 kV		

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

ReadyLine C 05 / C 03

Technical notes

Power factor: > 0.95

Dimensions:


C 05: Ø 46/50 mm (8.7/13 W)

C 03: Ø 33 mm


Welded leads: double FEP/FEP-insulation,
length: 300 mm, central or lateral lead exit

MOV - metal-oxide varistor,
enclosed unassembled


Fixing holes for screws M2

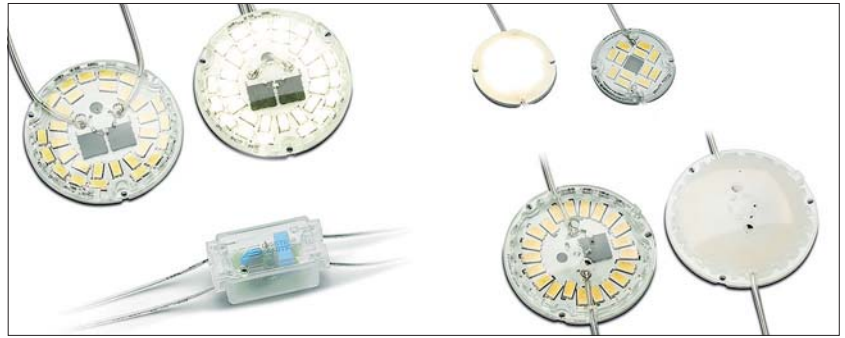


8.7 W - With lateral lead exit





13 W - With lateral lead exit




8.7 W - With central lead exit



13 W - With central lead exit



MOV

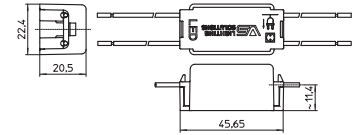

ReadyLine C05

Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency	
								min.	typ.				
8.7	LR21W	559575	220-240	21	warm white	2600...2900	clear	590	650	> 80	central	A+	
	LR21W	559576						lateral	A+				
	LR21W	559577						diffuse	480		530	central	A
	LR21W	559578						lateral	A				
	LR21W	559579	220-240	21	warm white	2900...3200	clear	720	780	> 80	central	A+	
	LR21W	554386						lateral	A+				
	LR21W	559580						diffuse	610		660	central	A+
	LR21W	554387						lateral	A+				
LR21W	559581	220-240	21	neutral white	3700...4200	clear	740	800	> 80	central	A+		
LR21W	554388						lateral	A+					
LR21W	559582						diffuse	630		680	central	A+	
LR21W	554389						lateral	A+					


Versions for the US market on request

ReadyLine C 05

Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency
								min.	typ.			
13	LR30W	559583	220-240	30	warm white	2600...2900	clear	910	940	> 80	central	A+
	LR30W	559584									lateral	A+
	LR30W	559585					diffuse	780	800	> 80	central	A
	LR30W	559586									lateral	A
	LR30W	554390	220-240	30	warm white	2900...3200	clear	1100	1190	> 80	central	A+
	LR30W	554391									lateral	A+
	LR30W	554392					diffuse	935	1010	> 80	central	A+
	LR30W	554393									lateral	A+
	LR30W	554394	220-240	30	neutral white	3700...4200	clear	1140	1210	> 80	central	A+
	LR30W	554395									lateral	A+
	LR30W	554396					diffuse	955	1030	> 80	central	A+
	LR30W	554397									lateral	A+
Accessories			Description				Tape thickness		Thermal conductivity		Breakdown voltage*	
-	-	555014	Thermally conductive adhesive transfer tape Ø 54 mm				0.25 mm		0.8 W/mK		5.5 kV	
-	-	554419	Thermally conductive transfer tape, non-adhesive Ø 49 mm				0.25 mm		2 W/mK		3 kV	
-	-	555013**	Thermally conductive transfer tape, adhesive on both sides Ø 54 mm				0.19 mm		0.9 W/mK		10.3 kV	

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

ReadyLine C 03

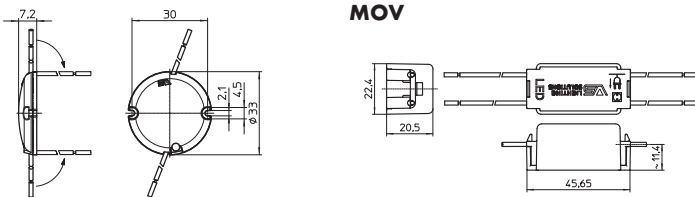

Max. output W	Type	Ref. No.	Voltage AC 50/60 Hz V	Number of LEDs pcs.	Colour	Correlated colour temperature K	Cover	Luminous flux lm		CRI R _a	Lead exit	Energy efficiency
								min.	typ.			
4.3	LR12W	559690	220-240	12	warm white	2600...2900	clear	290	330	> 80	lateral	A+
	LR12W	559691					diffuse	255	290		> 80	lateral
	LR12W	559693	220-240	12	warm white	2900...3200	clear	350	370	> 80	lateral	A++
	LR12W	559694					diffuse	312	330		> 80	lateral
	LR12W	559695	220-240	12	neutral white	3700...4200	clear	380	400	> 80	lateral	A++
	LR12W	559696					diffuse	335	355		> 80	lateral
Accessories			Description				Tape thickness		Thermal conductivity		Breakdown voltage*	
-	-	559965	Thermally conductive adhesive transfer tape Ø 37 mm				0.25 mm		0.8 W/mK		5.5 kV	
-	-	559966	Thermally conductive transfer tape, non-adhesive Ø 32 mm				0.25 mm		2 W/mK		3 kV	
-	-	559967**	Thermally conductive transfer tape, adhesive on both sides Ø 37 mm				0.19 mm		0.9 W/mK		10.3 kV	

* Average value (not for specification purpose) | ** For use in luminaires of protection class I (has to be tested in luminaire)

LED DOWNLIGHTS AND DECOLEDs



ADVANTAGES OF VS LED DOWNLIGHTS

LED Recessed Mounted Downlight and DecoLEDs

The integration of solid state lighting technology into conventional downlights provides optimal light distribution and extended life time, all at an affordable price. LED downlights are fully compatible with existing conventional downlight infrastructure, and are the perfect choice for both new and replacement markets.

■ PRO SERIES

- Slim design for easy installation in low false ceiling
- Integrated driver, direct connection to mains without additional connectors and/or junction box
- Dimmable with regular phase-cut dimmer

■ PRIME SERIES

- Very high efficiency of up to 100 lm/W
- Slim design for easy installation in low false ceiling
- High CRI ≥ 90
- Dimmable with external dimmable drivers

■ DECOLED

- Slim design for easy installation in low false ceiling
- Integrated driver, direct connection to mains
- Dimmable with regular phase-cut dimmer
- Swiveling LED module ($\pm 30^\circ$)



Pro Series


12 W / 18 W

Voltage supply: 220-240 V AC
 Integrated dimmable driver for direct connection to mains voltage
 Allowed operating temperature: -10 to 50 °C
 Allowed storage temperature: -10 to 50 °C
 Screw terminals: 2.5 mm²
 Quantity of screw terminals: 1x2-poles primary



Protection class II

SELV
 Degree of protection: IP20
 Service life time: > 35,000 hours (L50)


Pro 12 W



Pro 18 W



Pro 12 W



Pro 18 W

Type	Ref. No.	Colour	Colour temperature K	Luminous flux lm	Efficiency lm/W	Beam angle °	CRI R _a	Dimming	Power factor	System power W	Energy efficiency
Pro – 12 W											
DL-PRO-12-3000-110	550880	warm white	3000	850	71	110	≥ 80	yes	> 0.9	12	A+
DL-PRO-12-4000-110	550882	neutral white	4000	880	73	110	≥ 80	yes	> 0.9	12	A+
Pro – 18 W											
DL-PRO-18-3000-110	550885	warm white	3000	1350	75	110	≥ 80	yes	> 0.9	18	A
DL-PRO-18-4000-110	550886	neutral white	4000	1450	80	110	≥ 80	yes	> 0.9	18	A+

Test standards: IEC/EN 60598-1, IEC/EN 60598-2-2, IEC/EN 62493, IEC/EN 55015, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61547

Typical Luminance

At 1, 2 and 3 meters

Pro

Light intensity (Lux)						
Colour temperature K	Pro 12 W			Pro 18 W		
	1 m	2 m	3 m	1 m	2 m	3 m
Warm white 3000 K	335	84	37	510	128	56
Neutral white 4000 K	380	95	42	620	155	68

1

2

3

4

5

6

7

8

9

10

11

12

Prime L Series

12 W / 26 W

Current supply

for 12 W downlight: 350 mA DC

for 26 W downlight: 700 mA DC

Forward voltage: 37 V

Allowed operating temperature: -40 to 45 °C

Allowed storage temperature: -40 to 60 °C

Dimmable (dimnable LED drivers see from page 168 on)


Primary lead: PVC-insulation, length: 200 mm

Protection class III



Degree of protection: IP20

Service life time: > 50,000 hours (L70)


Prime L 12 W




Prime L 26 W

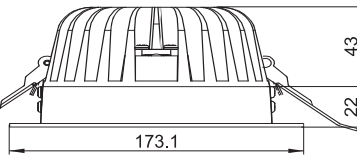


Prime L 12 W
99% clear



Prime L 12 W
87% diffuse



Prime L 26 W
99% diffuse



Prime L 26 W
87% diffuse

Type	Ref. No.	Colour	Colour temperature K	Luminous flux lm	Efficiency lm/W	Beam angle °	CRI R _a	Front plate transparency	Power W	Energy efficiency
Prime L – 12 W										
DL-PRIME-L-12-3000-60-C	550890	warm white	3000	1240	105	45	≥ 90	99% clear	12	A+
DL-PRIME-L-12-3000-80-D	550891	warm white	3000	1130	95	80	≥ 90	87% diffuse	12	A+
DL-PRIME-L-12-4000-60-C	550892	neutral white	4000	1390	115	45	≥ 90	99% clear	12	A++
DL-PRIME-L-12-4000-80-D	550893	neutral white	4000	1240	105	80	≥ 90	87% diffuse	12	A+
Prime L – 26 W										
DL-PRIME-L-26-3000-50-C	550894	warm white	3000	2310	92	50	≥ 90	99% clear	26	A+
DL-PRIME-L-26-3000-80-D	550895	warm white	3000	2200	88	80	≥ 90	87% diffuse	26	A+
DL-PRIME-L-26-4000-50-C	550896	neutral white	4000	2400	92	50	≥ 90	99% clear	26	A+
DL-PRIME-L-26-4000-80-D	550897	neutral white	4000	2250	88	80	≥ 90	87% diffuse	26	A+

Test standards: IEC/EN 60598-1, IEC/EN 60598-2-2, IEC/EN 62031, IEC/EN 62471, IEC/EN 55015, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61547

Prime H Series

12 W / 26 W / 38 W and 40 W

Current supply

for 12 W downlight: 350 mA DC

for 26 W downlight: 700 mA DC

for 38 W/40 W downlight: 1050 mA DC

Forward voltage: 37 V

Allowed operating temperature: -40 to 45 °C

Allowed storage temperature: -40 to 60 °C

Dimmable (dimnable LED drivers see from page 168 on)

Primary lead: PVC-insulation, length:

200 mm (12 W and 26 W)


300 mm (38 W and 40 W)

Protection class III


Degree of protection: IP20

Service life time: > 50,000 hours (L70)



Prime H 12 W




Prime H 26 W




Prime H 38 W and 40 W

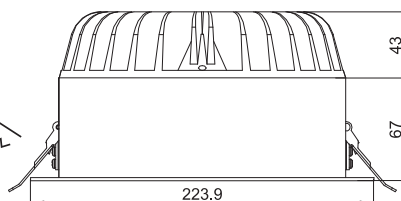


Prime H 12 W
99% clear




Prime H 12 W
87% diffuse




Prime H 26 W
99% clear



Prime H 26 W
87% diffuse



Prime H 38 W/40 W
99% clear



Prime H 38 W/40 W
87% diffuse

Type	Ref. No.	Colour	Colour temperature K	Luminous flux lm	Efficiency lm/W	Beam angle °	CRI R _a	Front plate transparency	Power W	Energy efficiency
Prime H – 12 W										
DL-PRIME-H-12-3000-50-C	550898	warm white	3000	895	75	50	≥ 90	99% clear	12	A
DL-PRIME-H-12-3000-60-D	550899	warm white	3000	765	65	60	≥ 90	87% diffuse	12	A
DL-PRIME-H-12-4000-50-C	550900	neutral white	4000	1010	85	50	≥ 90	99% clear	12	A+
DL-PRIME-H-12-4000-60-D	550901	neutral white	4000	840	70	60	≥ 90	87% diffuse	12	A
Prime H – 26 W										
DL-PRIME-H-26-3000-40-C	550902	warm white	3000	2140	85	40	≥ 90	99% clear	26	A
DL-PRIME-H-26-3000-70-D	550903	warm white	3000	1820	70	70	≥ 90	87% diffuse	26	A
DL-PRIME-H-26-4000-40-C	550904	neutral white	4000	2170	85	40	≥ 90	99% clear	26	A+
DL-PRIME-H-26-4000-70-D	550905	neutral white	4000	1915	70	70	≥ 90	87% diffuse	26	A
Prime H – 38 W / 40 W										
DL-PRIME-H-383000-40-C	550906	warm white	3000	3240	85	40	≥ 90	99% clear	38	A+
DL-PRIME-H-38-3000-75-D	550907	warm white	3000	3000	80	75	≥ 90	87% diffuse	38	A
DL-PRIME-H-40-4000-40-C	550908	neutral white	4000	3240	85	40	≥ 90	99% clear	40	A+
DL-PRIME-H-40-4000-75-D	550909	neutral white	4000	2930	75	75	≥ 90	87% diffuse	40	A

Test standards: IEC/EN 60598-1, IEC/EN 60598-2-2, IEC/EN 62031, IEC/EN 62471, IEC/EN 55015, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61547

Typical Luminance

At 1, 2 and 3 meters

Prime L

Light intensity (Lux)						
Colour temperature K	Prime L 12 W			Prime L 26 W		
	1 m	2 m	3 m	1 m	2 m	3 m
Warm white 3000 K – 99% clear	1270	318	140	1995	500	220
Warm white 3000 K – 87% diffuse	580	145	65	1065	265	120
Neutral white 4000 K – 99% clear	1395	350	155	2060	515	230
Neutral white 4000 K – 87% diffuse	625	155	70	1075	270	120

Prime H



Light intensity (Lux)									
Colour temperature K	Prime H 12 W			Prime H 26 W			Prime H 38 W / 40 W		
	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m
Warm white 3000 K – 99% clear	1120	280	125	3600	900	400	5200	1300	578
Warm white 3000 K – 87% diffuse	600	150	68	1210	302	135	1870	468	208
Neutral white 4000 K – 99% clear	1260	315	140	3600	900	400	5125	1280	570
Neutral white 4000 K – 87% diffuse	660	165	74	1290	323	144	1830	458	204

VS DecoLED

Complete LEDSpot equipped with optics, heatsink, leads and metal frame

Technical notes

- For direct connection to mains voltage
- Mains voltage: 220-240 V, 50/60 Hz
- Power factor: > 0.9
- Metal frame, round
- For cut-out: 74 mm
- Swiveling LED module ($\pm 30^\circ$)
- Beam angle: 38°
- Allowed operating temperature: -10 to 40°C
- Phase-cut dimmable (trailing-edge dimmers are preferred)
- Leads: Cu tinned, stranded conductors 0.5 mm^2
 - Si-insulation and sleeve
- With integrated dimmable driver
- Degree of protection: IP20
- Weight: 160 g

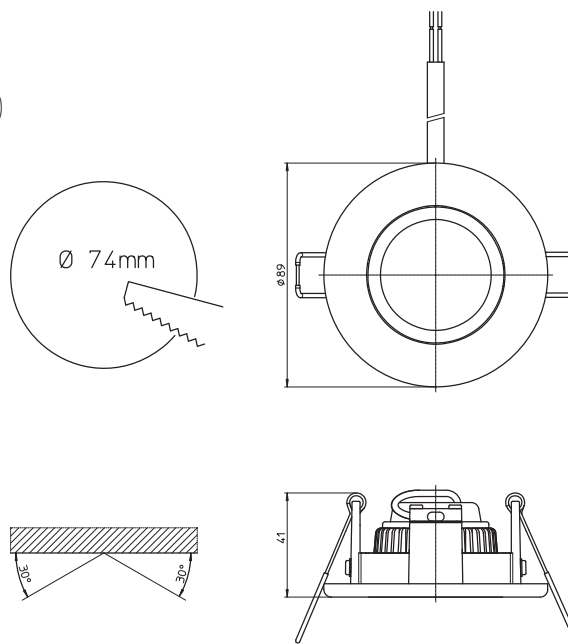

Type	Ref. No.	Colour	Colour temperature K	Luminous flux lm		Light intensity at 230 V Candela	Beam angle $^\circ$	CRI R_a	Max. output W	Energy efficiency
				min.	typ.					
DecoLED-7-3000-38	562282	warm white	3000	495	560	690	38	80	7	A+

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

FOR RETAIL, RESIDENTIAL AND FURNITURE LIGHTING



CONVENIENT LED TECHNOLOGY

As the perfect replacement for halogen lamps, these LED modules are ideal for use in furniture, false ceilings as well as cooker hoods.

These LEDSpots are available with high-power LEDs or with COB technology featuring a capacity range of 3-30 W. These modules are equipped with optics or reflectors depending on the field of application and heat sinks for a proper thermal management of the LED. Some versions also have fixing frames for easy installation.

The package is rounded off by a matching LED driver housed in a compact casing plus a set of cables with pre-assembled plugs for connecting up to five LED modules.

Typical applications for LEDSpots

- Replacement of more residential lamps (AR111, MR16, MR11)
- Integration in luminaires (except PRO series)
- Retail lighting
- Marking paths, stairs, etc.
- Furniture lighting (IP54 version for humid rooms)
- Light advertising
- Entertainment

The specifications contained in this catalogue can change due to technical innovations. Any such changes will be made without separate notification.

Please read the safety and installation instructions on the individual products as well as further technical information provided in the extensive product descriptions at www.vossloh-schwabe.com.



LEDSpots at a Glance

The use of LEDs offers many advantages in comparison to conventional lighting solutions.

ShopLine series

- Replacement for HID lamps 20-150 W
- Built-in spot with heat sink based on LUGA modules
- Reflector for homogeneous light distribution



ActiveLine series

- Replacement for Halogen lamps up to 75 W and HID lamps 20-35 W (MR16)
- Built-in spot with heat sink based on LUGA or other COB modules
- Reflector or optics for homogeneous light distribution



Complete LEDSpots with frame

- Replacement for Halogen lamps 20-35 W
- Flat LED spot with heat sink and frame based on COB or SMD modules
- For built-in into ceilings or metal sheets



1

2

3

4

5

6

7

8

9

10

11

12

ShopLine 111

Built-in LEDSpot equipped with a reflector, heat sink and leads - Replacement for AR111

Technical notes

Reflector: Ø 111 mm

Heat sink material: aluminium

Max. operating temperature at t_p point:

99 °C: Type C125/C128

80 °C: Type S150

Lumen maintenance: L90/B10; 50,000 hrs.

60 °C: Type C125/C128

70 °C: Type S150

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Use of external LED constant-current drivers

The ceramic PCB ensures optimum thermal management

Plastic clear cover to protect reflector

(opaque cover on request)

Fixation

reflector: front and back of rim

heat sink: lateral fixation with M5 screws and



nuts or rear side fixation with tapping screws ST2.9

Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP-insulation and neoprene sleeve, length: 300 mm

With integrated cord grip

Packaging unit: 6 pcs.

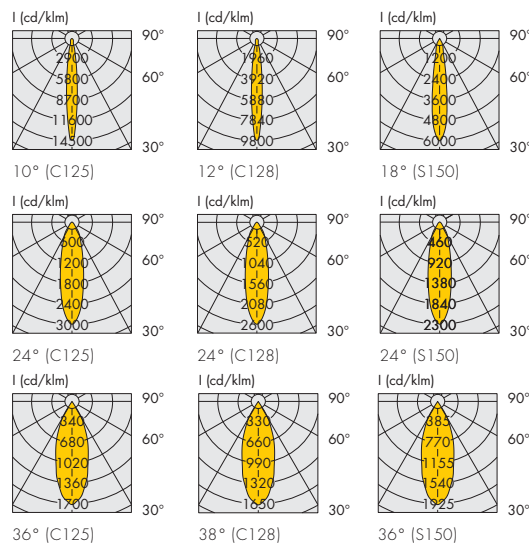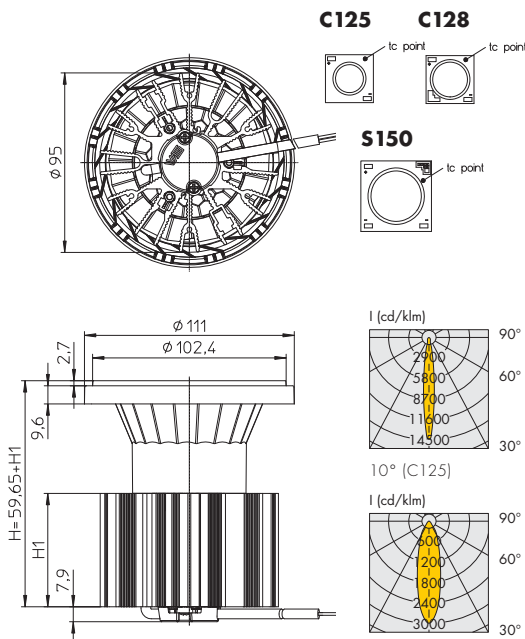

Dimensions		Weight g
H1	H	
40 mm	99.65 mm	310
60 mm	119.65 mm	430
80 mm	139.65 mm	550

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*			Light intensity at max. current Candela	Beam angle °	CRI R_a	Energy efficiency at max. current
				350 mA lm	500 mA lm	700 mA lm				
				$P_{el} = 12$ W	$P_{el} = 17.6$ W					
				$U_{typ.} = 34.2$ V	$U_{typ.} = 35.1$ V					
ShopLine 111 C125	561664	warm white	3000	1435	1930	—	28000	10	85	A+
ShopLine 111 C125	561665	neutral white	4000	1480	1985	—	29000	10	85	A+
ShopLine 111 C125	561666	warm white	3000	1435	1930	—	5800	24	85	A+
ShopLine 111 C125	566134	neutral white	4000	1480	1985	—	6100	24	85	A+
ShopLine 111 C125	566135	warm white	3000	1400	1885	—	3200	36	85	A+
ShopLine 111 C125	566136	neutral white	4000	1445	1940	—	3300	36	85	A+

Versions with other colour temperature, CRI 95 or pearl white on request | Versions with white reflector for extra wide beam angle on request

* Production tolerance of luminous flux, voltage and power consumption: ±10%

ShopLine 111

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage (U _{typ.}) and power consumption (P _{el})*			Light intensity at max. current Candela	Beam angle °	CRI R _a	Energy efficiency at max. current
				350 mA lm	500 mA lm	700 mA lm				
H1 = 60 mm (heat sink height)				P _{el} = 11.6 W U _{typ.} = 33.2 V	P _{el} = 16.9 W U _{typ.} = 33.9 V	P _{el} = 24.3 W U _{typ.} = 34.7 V				
ShopLine 111 C128	566137	warm white	3000	1550	2115	2810	27500	12	85	A++
ShopLine 111 C128	566138	neutral white	4000	1600	2175	2880	28300	12	85	A++
ShopLine 111 C128	566139	warm white	3000	1550	2115	2810	7300	24	85	A++
ShopLine 111 C128	566140	neutral white	4000	1600	2175	2880	7550	24	85	A++
ShopLine 111 C128	566141	warm white	3000	1510	2070	2730	4150	38	85	A+
ShopLine 111 C128	566142	neutral white	4000	1560	2125	2820	4350	38	85	A++
H1 = 80 mm (heat sink height)				P _{el} = 14.4 W U _{typ.} = 41.4 V	P _{el} = 20.9 W U _{typ.} = 41.8 V	P _{el} = 29.9 W U _{typ.} = 42.7 V				
ShopLine 111 S150	560835	warm white	3000	1875	2600	3500	21000	18	85	A++
ShopLine 111 S150	560840	neutral white	4000	1945	2700	3650	22000	18	85	A++
ShopLine 111 S150	560836	warm white	3000	1895	2630	3540	8100	24	85	A++
ShopLine 111 S150	560841	neutral white	4000	1970	2735	3690	8500	24	85	A++
ShopLine 111 S150	560771	warm white	3000	1895	2630	3540	6800	36	85	A++
ShopLine 111 S150	560772	neutral white	4000	1970	2735	3690	7200	36	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request | Versions with white reflector for extra wide beam angle on request

* Production tolerance of luminous flux, voltage and power consumption: ±10%

1

2

3

4

5

6

7

8

9

10

11

12

NEXT 111

Built-in LEDSpot equipped with an interchangeable reflector, heat sink and leads - Replacement for AR111

Technical notes

Reflector: Ø 111 mm, interchangeable

Heat sink material: aluminium

Max operating temperature at t_p point:

99 °C: Type C125/C128

80 °C: Type S150

Lumen maintenance: L90/B10; 50,000 hrs.

60 °C: Type C125/C128

70 °C: Type S150

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Use of external LED constant-current drivers

The ceramic PCB ensures optimum thermal management

Plastic clear cover to protect reflector

(opaque cover on request)

Fixation

reflector: front rim

heat sink: lateral fixation with M5 screws and nuts


or rear side fixation with self-tapping screws ST2.9

Leads: Cu tinned, stranded conductors 0.5 mm²,


FEP-insulation and neoprene sleeve, length: 300 mm

With integrated cord grip


Packaging unit: 6 pcs.

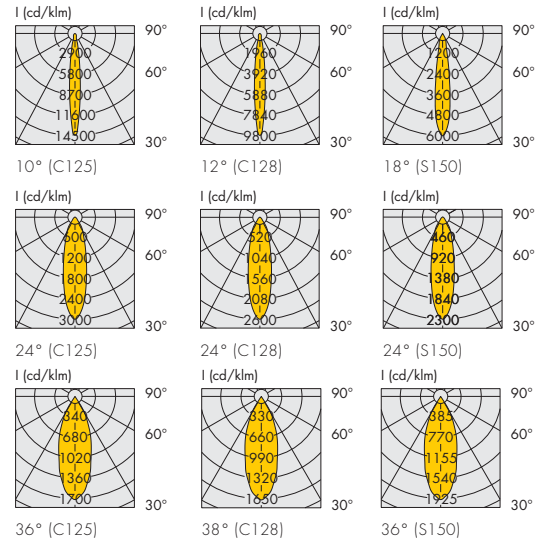


Dimensions		Weight g
H1	H	
40 mm	99.65 mm	310
60 mm	119.65 mm	430
80 mm	139.65 mm	550

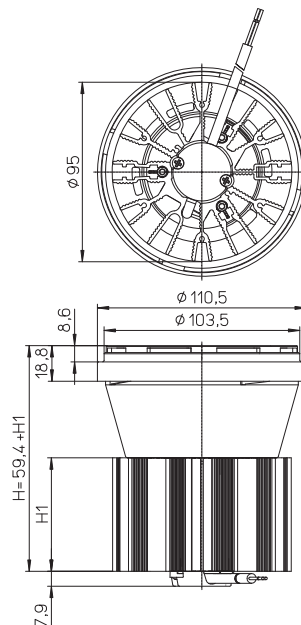


C125



C128



S150



NEXT 111

Type	Ref. No.		Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*			Light intensity at max. current Candela	Beam angle °	CRI R_G	Energy efficiency at max. current
	for black LEDSpots	white LEDSpots			350 mA lm	500 mA lm	700 mA lm				
H1 = 40 mm (heat sink height)					$P_{el} = 12$ W $U_{typ.} = 34.2$ V	$P_{el} = 17.6$ W $U_{typ.} = 35.1$ V					
Next 111 C125	561701	561707	warm white	3000	1435	1930	–	28000	10	85	A+
Next 111 C125	561702	561708	neutral white	4000	1480	1985	–	29000	10	85	A+
Next 111 C125	561703	561709	warm white	3000	1435	1930	–	5800	24	85	A+
Next 111 C125	561704	561710	neutral white	4000	1480	1985	–	6100	24	85	A+
Next 111 C125	561705	561711	warm white	3000	1400	1885	–	3200	36	85	A+
Next 111 C125	561706	561712	neutral white	4000	1445	1940	–	3300	36	85	A+
H1 = 60 mm (heat sink height)					$P_{el} = 11.6$ W $U_{typ.} = 33.2$ V	$P_{el} = 16.9$ W $U_{typ.} = 33.9$ V	$P_{el} = 24.3$ W $U_{typ.} = 34.7$ V				
Next 111 C128	561810	561816	warm white	3000	1550	2115	2810	27500	12	85	A++
Next 111 C128	561811	561817	neutral white	4000	1600	2175	2880	28300	12	85	A++
Next 111 C128	561812	561818	warm white	3000	1550	2115	2810	7300	24	85	A++
Next 111 C128	561813	561819	neutral white	4000	1600	2175	2880	7550	24	85	A++
Next 111 C128	561814	561820	warm white	3000	1510	2070	2730	4150	38	85	A+
Next 111 C128	561815	561821	neutral white	4000	1560	2125	2820	4350	38	85	A++
H1 = 80 mm (heat sink height)					$P_{el} = 14.4$ W $U_{typ.} = 41.4$ V	$P_{el} = 20.9$ W $U_{typ.} = 41.8$ V	$P_{el} = 29.9$ W $U_{typ.} = 42.7$ V				
Next 111 S150	560866	560887	warm white	3000	1875	2600	3500	21000	18	85	A++
Next 111 S150	560873	560892	neutral white	4000	1945	2700	3650	22000	18	85	A++
Next 111 S150	560867	560888	warm white	3000	1895	2630	3540	8100	24	85	A++
Next 111 S150	560874	560893	neutral white	4000	1970	2735	3690	8500	24	85	A++
Next 111 S150	560868	560889	warm white	3000	1895	2630	3540	6800	36	85	A++
Next 111 S150	560876	560894	neutral white	4000	1970	2735	3690	7200	36	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request | Versions with white reflector for extra wide beam angle on request

* Production tolerance of luminous flux, voltage and power consumption: $\pm 10\%$

With Zhaga adaptor for aluminium reflectors

Reflector size

top: $\varnothing 94$ mm

bottom: $\varnothing 40$ mm

height: 50 mm

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*			Beam angle °	CRI R_G	Energy efficiency at max. current
				350 mA lm	500 mA lm	700 mA lm			
H1 = 40 mm (heat sink height)				$P_{el} = 12$ W $U_{typ.} = 34.2$ V	$P_{el} = 17.6$ W $U_{typ.} = 35.1$ V				
Next 111 C125	561822	warm white	3000	1650	2215	–	120	85	A++
H1 = 60 mm (heat sink height)				$P_{el} = 11.6$ W $U_{typ.} = 33.2$ V	$P_{el} = 16.9$ W $U_{typ.} = 33.9$ V	$P_{el} = 24.3$ W $U_{typ.} = 34.7$ V			
Next 111 128	561823	warm white	3000	1775	2430	3210	120	85	A++
H1 = 80 mm (heat sink height)				$P_{el} = 14.4$ W $U_{typ.} = 41.4$ V	$P_{el} = 20.9$ W $U_{typ.} = 41.8$ V	$P_{el} = 29.9$ W $U_{typ.} = 42.7$ V			
Next 111 S150	561824	warm white	3000	2170	2955	3940	120	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request | Versions with white reflector for extra wide beam angle on request

* Production tolerance of luminous flux, voltage and power consumption: $\pm 10\%$

NEXT 111 R

**Built-in LEDSpot equipped with an interchangeable aluminium reflector, heat sink and leads
- Replacement for AR111**

Technical notes

For direct connection to mains voltage

Mains voltage: 220-240 V, 50/60 Hz

Power factor: > 0.95

Reflector: Ø 111 mm (with flange), aluminium, bayonet fixing

Heat sink material: aluminium

Max operating temperature at t_p point: 85 °C

Lumen maintenance:

L70/B50; 50,000 hrs. at 70 °C

Temperature depends on installation situation and

has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Plastic clear cover to protect reflector

(opaque cover on request)

Fixation

reflector: front rim

heat sink: lateral fixation with M5 screws and nuts



or rear side fixation with self-tapping screws ST2.9

Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP/FEP-insulation, length: 300 mm

With integrated cord grip

Packaging unit: 6 pcs.

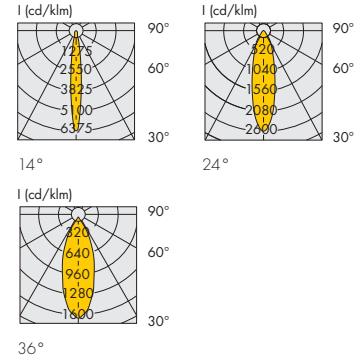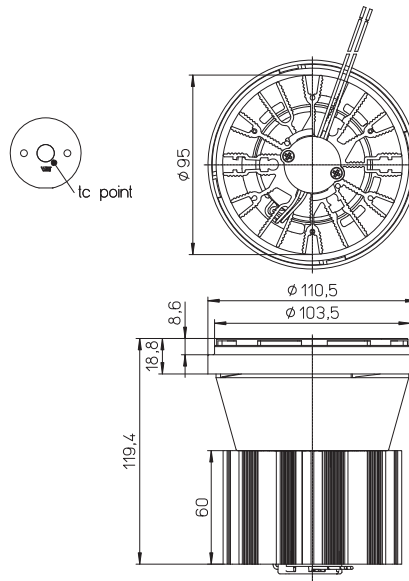

Type	Ref. No.		Mains voltage AC 50/60 Hz V	Colour	Correlated colour temperature K	Typ. luminous flux* lm	Light intensity at 230 V Candela	Beam angle °	CRI R_a	Power consumption at 230 V W	Energy efficiency at 230 V
	for black LEDSpots	white LEDSpots									
Next 111 R 20	561713	561719	220-240	warm white	3000	1570	10000	14	80	20	A
Next 111 R 20	561714	561720	220-240	neutral white	4000	1650	10600	14	80	20	A
Next 111 R 20	561715	561721	220-240	warm white	3000	1590	4100	24	80	20	A
Next 111 R 20	561716	561722	220-240	neutral white	4000	1675	4300	24	80	20	A+
Next 111 R 20	561717	561723	220-240	warm white	3000	1570	2500	36	80	20	A
Next 111 R 20	561718	561724	220-240	neutral white	4000	1650	2550	36	80	20	A

* Production tolerance of luminous flux: $\pm 10\%$

ShopLine 85

Built-in LEDSpot equipped with a reflector, heat sink and leads

Technical notes

Reflector: Ø 85 mm

Heat sink material: aluminium

Max operating temperature at t_p point: 99 °C

Lumen maintenance:

L90/B10; 50,000 hrs. at 60 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Use of external LED constant-current drivers

The ceramic PCB ensures optimum thermal management

Fixation

heat sink: lateral fixation with M5 screws and nuts
or rear side fixation with self-tapping screws ST2.9



Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP-insulation and PVC sleeve, length: 300 mm

With integrated cord grip

Weight: 360 g

Packaging unit: 6 pcs.

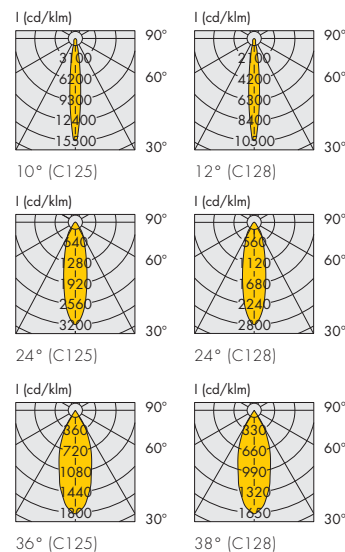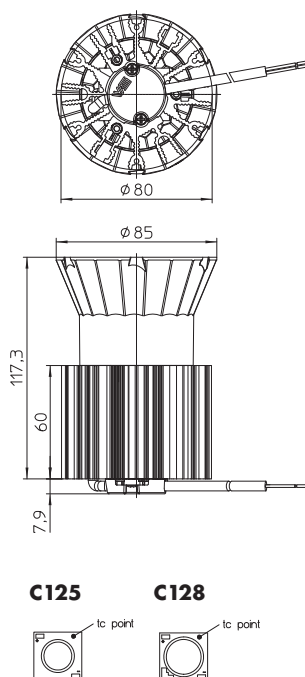

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*			Light intensity at max. current Candela	Beam angle °	CRI R_c	Energy efficiency at max. current
				350 mA lm	500 mA lm	700 mA lm				
				$P_{el} = 12 \text{ W}$	$P_{el} = 17.6 \text{ W}$					
				$U_{typ.} = 34.2 \text{ V}$	$U_{typ.} = 35.1 \text{ V}$					
ShopLine 85 C125										
ShopLine 85 C125	561679	warm white	3000	1470	1970	–	30500	10	85	A+
ShopLine 85 C125	561680	neutral white	4000	1515	2030	–	31600	10	85	A++
ShopLine 85 C125	561681	warm white	3000	1470	1970	–	6300	24	85	A+
ShopLine 85 C125	561682	neutral white	4000	1515	2030	–	6600	24	85	A++
ShopLine 85 C125	561683	warm white	3000	1435	1930	–	3450	36	85	A+
ShopLine 85 C125	561684	neutral white	4000	1480	1985	–	3600	36	85	A++
				$P_{el} = 11.6 \text{ W}$	$P_{el} = 16.9 \text{ W}$	$P_{el} = 24.3 \text{ W}$				
				$U_{typ.} = 33.2 \text{ V}$	$U_{typ.} = 33.9 \text{ V}$	$U_{typ.} = 34.7 \text{ V}$				
ShopLine 85 C128										
ShopLine 85 C128	561826	warm white	3000	1580	2165	2860	30200	12	85	A++
ShopLine 85 C128	561827	neutral white	4000	1630	2225	2950	31100	12	85	A++
ShopLine 85 C128	561828	warm white	3000	1580	2165	2860	8000	24	85	A++
ShopLine 85 C128	561829	neutral white	4000	1630	2225	2950	8300	24	85	A++
ShopLine 85 C128	561830	warm white	3000	1545	2115	2795	4600	38	85	A+
ShopLine 85 C128	561832	neutral white	4000	1600	2175	2880	4800	38	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request | Versions with white reflector for extra wide beam angle on request

* Production tolerance of luminous flux, voltage and power consumption: ±10%

EVO90

Built-in LEDSpot equipped with an interchangeable aluminium reflector, heat sink and leads

Technical notes

Reflector: Ø 90 mm, aluminium, bayonet fixing

Holder: PC, inner ring: metallized

Heat sink material: aluminium

Max operating temperature at t_p point: 99 °C

Lumen maintenance:

L90/B10; 50,000 hrs. at 60 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Use of external LED constant-current drivers

The ceramic PCB ensures optimum thermal management

Fixation

heat sink: lateral fixation with M5 screws and nuts

or rear side fixation with self-tapping screws ST2.9


Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP-insulation and PVC sleeve, length: 300 mm


With integrated cord grip

Weight: 280/360 g (C125/C128)


Packaging unit: 6 pcs.

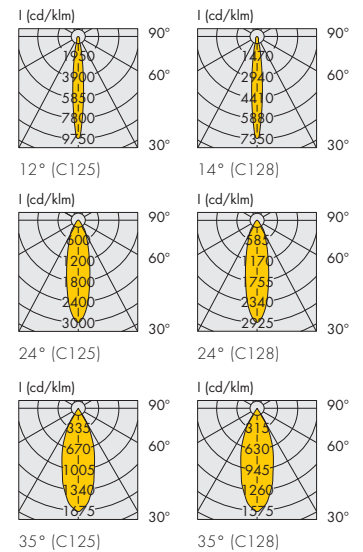

EVO90 C125

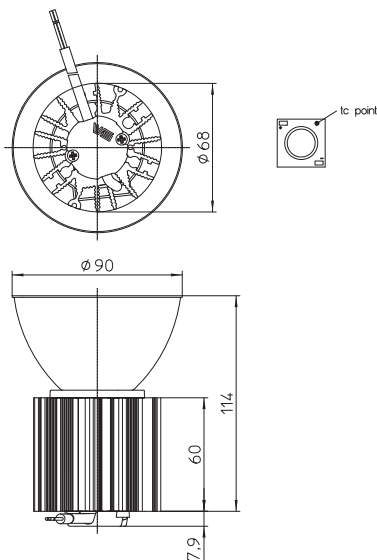

EVO90 C128

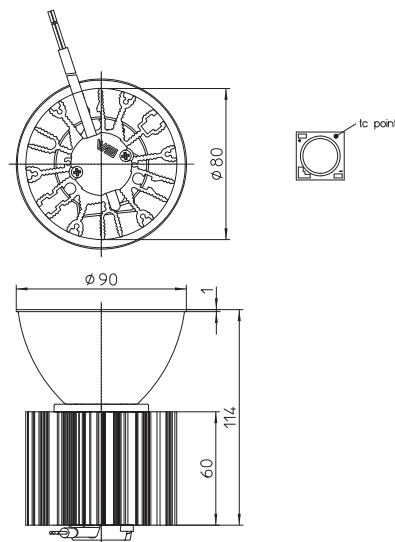

EVO90

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage (U _{typ.}) and power consumption (P _{el})*			Light intensity at max. current Candela	Beam angle °	CRI R _a	Energy efficiency at max. current
				350 mA lm	500 mA lm	700 mA lm				
EVO90 C125				P _{el} = 12 W U _{typ.} = 34.2 V	P _{el} = 17.6 W U _{typ.} = 35.1 V					
EVO90 C125	561745	warm white	3000	1470	1970	–	19200	12	85	A+
EVO90 C125	561746	neutral white	4000	1515	2030	–	20000	12	85	A++
EVO90 C125	561747	warm white	3000	1485	1995	–	5900	24	85	A+
EVO90 C125	561748	neutral white	4000	1530	2050	–	6200	24	85	A++
EVO90 C125	561749	warm white	3000	1470	1970	–	3300	35	85	A+
EVO90 C125	561750	neutral white	4000	1515	2030	–	3400	35	85	A++
EVO90 C128				P _{el} = 11.6 W U _{typ.} = 33.2 V	P _{el} = 16.9 W U _{typ.} = 33.9 V	P _{el} = 24.3 W U _{typ.} = 34.7 V				
EVO90 C128	561837	warm white	3000	1580	2165	2860	21000	14	85	A++
EVO90 C128	561838	neutral white	4000	1630	2225	2945	21900	14	85	A++
EVO90 C128	561839	warm white	3000	1600	2190	2890	8400	24	85	A++
EVO90 C128	561840	neutral white	4000	1650	2250	2980	8700	24	85	A++
EVO90 C128	561841	warm white	3000	1580	2165	2860	4500	35	85	A++
EVO90 C128	561843	neutral white	4000	1630	2225	2945	4600	35	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request

* Production tolerance of luminous flux, voltage and power consumption: ±10%

1

2

3

4

5

6

7

8

9

10

11

12

EVO90 R

Built-in LEDSpot equipped with an interchangeable aluminium reflector, heat sink and leads

Technical notes

For direct connection to mains voltage

Mains voltage: 220-240 V, 50/60 Hz

Power factor: > 0.95

Reflector: Ø 90 mm, aluminium, bayonet fixing

Holder: PC, inner ring: metallized

Heat sink material: aluminium

Max. operating temperature at t_p point: 85 °C

Lumen maintenance:

L70/B50; 50,000 hrs. at 70 °C

Temperature depends on installation situation and

has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Fixation

heat sink: lateral fixation with M5 screws and nuts

or rear side fixation with self-tapping screws ST2.9



Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP/FEP-insulation, length: 350 mm

With integrated cord grip

Weight: 360 g

Packaging unit: 6 pcs.

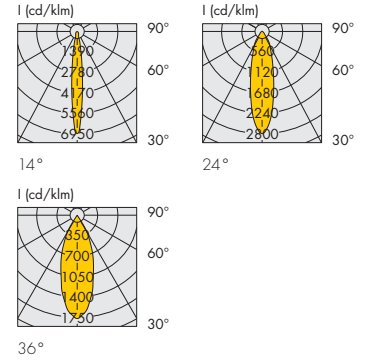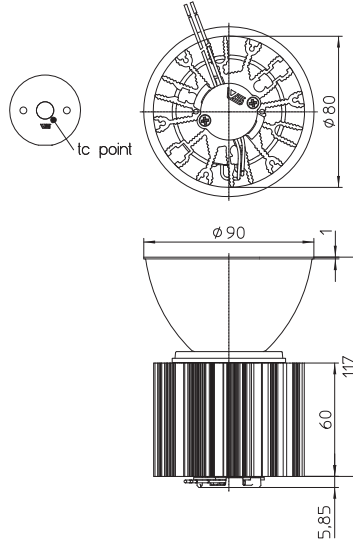

Type	Ref. No.	Mains voltage AC 50/60 Hz V	Colour	Correlated colour temperature K	Typ. luminous flux* lm	Light intensity at 230 V Candela	Beam angle °	CRI R_a	Power consumption at 230 V W	Energy efficiency at 230 V
EVO90 R 20	561757	220-240	warm white	3000	1585	11000	14	80	20	A
EVO90 R 20	561758	220-240	neutral white	4000	1675	11600	14	80	20	A+
EVO90 R 20	561759	220-240	warm white	3000	1600	4500	24	80	20	A
EVO90 R 20	561760	220-240	neutral white	4000	1695	4700	24	80	20	A+
EVO90 R 20	561761	220-240	warm white	3000	1585	2750	36	80	20	A
EVO90 R 20	561762	220-240	neutral white	4000	1675	2800	36	80	20	A+

* Production tolerance of luminous flux: ±10%

EVO75

Built-in LEDSpot equipped with an interchangeable aluminium reflector, heat sink and leads

Technical notes

Reflector: Ø 75 mm, aluminium, bayonet fixing

Holder: PC, inner ring: metallized

Heat sink material: aluminium

Max operating temperature at t_p point: 99 °C

Lumen maintenance:

L90/B10; 50,000 hrs. at 60 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Use of external LED constant-current drivers

The ceramic PCB ensures optimum thermal management

Fixation

heat sink: lateral fixation with M5 screws and nuts

or rear side fixation with self-tapping screws ST2.9



Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP-insulation and PVC sleeve, length: 300 mm

With integrated cord grip

Weight: 280 g

Packaging unit: 6 pcs.

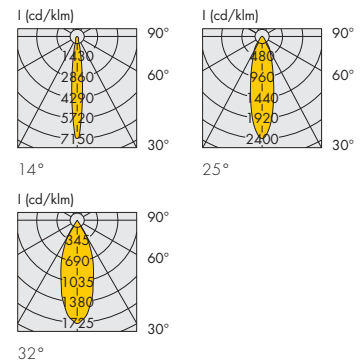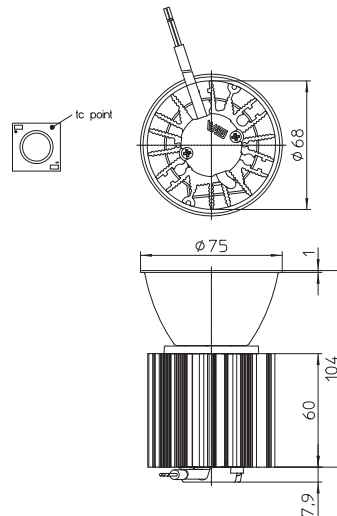

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*		Light intensity at max. current Candela	Beam angle °	CRI R_a	Energy efficiency at max. current
				350 mA lm	500 mA lm				
				$P_{el} = 12\text{ W}$ $U_{typ.} = 34.2\text{ V}$	$P_{el} = 17.6\text{ W}$ $U_{typ.} = 35.1\text{ V}$				
EVO75 C125	561739	warm white	3000	1470	1970	14100	14	85	A+
EVO75 C125	561740	neutral white	4000	1515	2030	15000	14	85	A++
EVO75 C125	561741	warm white	3000	1485	1995	4800	25	85	A+
EVO75 C125	561742	neutral white	4000	1530	2055	5000	25	85	A++
EVO75 C125	561743	warm white	3000	1470	1970	3400	32	85	A+
EVO75 C125	561744	neutral white	4000	1515	2030	3480	32	85	A++

Versions with other colour temperature, CRI 95 or pearl white on request
* Production tolerance of luminous flux, voltage and power consumption: ±10%

EVO75 R

Built-in LEDSpot equipped with an interchangeable aluminium reflector, heat sink and leads

Technical notes

For direct connection to mains voltage

Mains voltage: 220–240 V, 50/60 Hz

Power factor: > 0.95

Reflector: Ø 75 mm, aluminium, bayonet fixing

Holder: PC, inner ring: metallized

Heat sink material: aluminium

Max operating temperature at t_p point: 85 °C

Lumen maintenance:

L70/B50; 50,000 hrs. at 70 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

The aluminium PCB ensures optimum thermal management

Fixation heat sink: lateral fixation with M5 screws and nuts

or rear side fixation with self-tapping screws ST2.9



Leads: Cu tinned, stranded conductors 0.5 mm²,

FEP/FEP-insulation and neoprene sleeve, length: 300 mm

With integrated cord grip

Weight: 280 g

Packaging unit: 6 pcs.

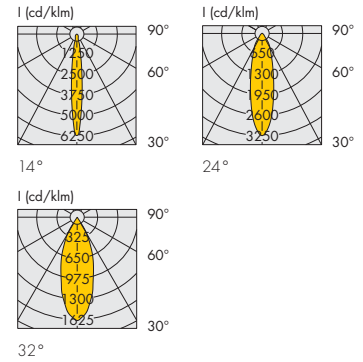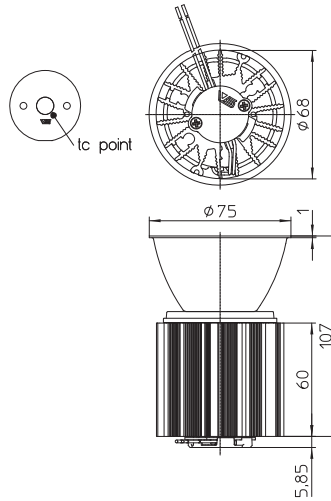

Type	Ref. No.	Mains voltage AC 50/60 Hz V	Colour	Correlated colour temperature K	Typ. luminous flux* lm	Light intensity at 230 V Candela	Beam angle °	CRI R_a	Power consumption at 230 V W	Energy efficiency at 230 V
EVO75 R 10	561751	220–240	warm white	3000	800	5000	14	80	10	A
EVO75 R 10	561752	220–240	neutral white	4000	840	5200	14	80	10	A+
EVO75 R 10	561753	220–240	warm white	3000	800	2600	24	80	10	A
EVO75 R 10	561754	220–240	neutral white	4000	845	2750	24	80	10	A+
EVO75 R 10	561755	220–240	warm white	3000	800	1300	32	80	10	A
EVO75 R 10	561756	220–240	neutral white	4000	845	1350	32	80	10	A+

* Production tolerance of luminous flux: ±10%

Reflectors and Holders for EVO

Exchangeable aluminum reflectors for the EVO series

Technical notes

Reflectors made of aluminium with bayonet fixation

Surface: anodised

Weight: 27/17 g (D90/D75)



Packaging unit: 18 pcs.

Usage and maintenance

If necessary clean reflectors with mild soap, water and soft cloth.

Never use any commercial cleaning solvents on reflectors, like alcohol.

Please handle or install reflectors with wearing gloves, skin oils may damage reflector or its optical characteristic.



Ref. No.	Beam characteristic	Beam angle (°)			
		EVO 90, EVO 75 DMC125	EVO 90 DMC128	EVO 75 R 10	NEXT 111, EVO 90 R 20
Reflector D90 - H = 50					
557359	narrow	12	14	14	14
557360	medium	24	24	24	24
557361	wide	35	35	36	36
Reflector D75 - H = 40					
557152	narrow	14	16	14	14
557153	medium	25	26	24	24
557154	wide	32	34	32	32

It's possible to use all the reflectors on the same holder.


Holder

Material: PC, inner ring: metallized


Packaging unit: 72 pcs.

Ref. No.	For COB Type	Protection on LES
561161	DMC125 / DMC128	-
561847	R10 / R20	yes

561161



561847



ActiveLine LUGA

Built-in LEDSpot equipped with a reflector, heat sink and leads

Technical notes

Reflector: Ø 50 mm

Heat sink material: aluminium

The ceramic PCB ensures optimum thermal management

Plastic clear cover to protect reflector (opaque cover on request)

Use of external LED constant-current drivers

Version with plug on request



ActiveLine 9.1 / 7.1 / 6.1 / HALO / Quad

Built-in LEDSpot equipped with a reflector, heat sink and leads

Technical notes

Reflector: Ø 50 mm

Heat sink material: aluminium

(Quad: thermoconductive resin)

Aluminium PCB for optimum thermal management

Plastic clear cover to protect reflector

Use of external LED constant-current drivers

Version with plug on request



ActiveLine PRO

Complete LEDSpots equipped with a reflector or optics, heat sink, leads and metal frame

Type and Ref. No. on request



ActiveLine LUGA C

Technical notes

Reflector: Ø 50 mm

Max operating temperature at t_p point: 85 °C

Lumen maintenance: L90/B10; 50,000 hrs.

65 °C (350 mA)

60 °C (500 mA)

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM

Leads: Cu tinned, stranded

conductors 0.5 mm², FEP-insulation

and neoprene sleeve, length: 200 mm

With integrated cord grip

Weight: 145/260 g (A/B)




Packaging unit: 45/24 pcs. (A/B)



ActiveLine (A) – max. 350 mA



ActiveLine (B) – max. 500 mA

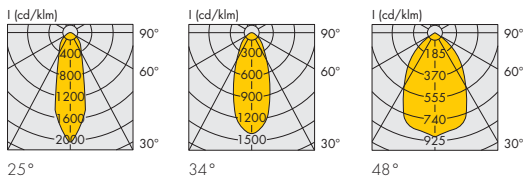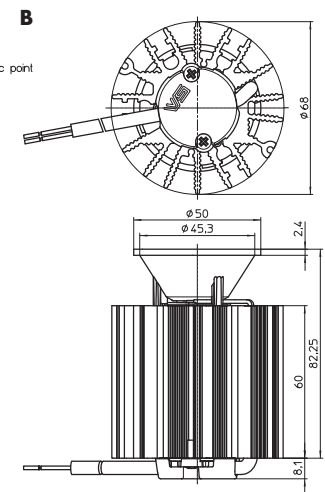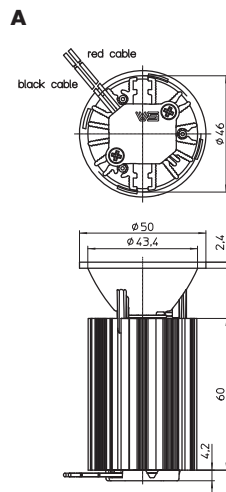

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el})*		Light intensity at max. current Candela	Beam angle °	CRI R_a	Drawing	Energy efficiency at max. current
				350 mA lm	500 mA lm					
Narrow beam angle: 25°				$P_{el} = 11 \text{ W}, U_{typ.} = 31.4 \text{ V}$		$P_{el} = 16.3 \text{ W}, U_{typ.} = 32.6 \text{ V}$				
Luga C 115 27K	559388	warm white	2700	1190	–	2390	25	82	A	A+
	559397			1190	1580	3165			B	
Luga C 115 30K	559391	warm white	3000	1275	–	2560	25	85	A	A+
	559400			1275	1685	3370			B	
Luga C 115 40K	559394	neutral white	4000	1355	–	2720	25	85	A	A++
	559403			1355	1795	3590			B	A+
Luga C 115 30K	559412	warm white	3000	1065	–	3220	25	95	A	A+
	559418			1065	1405	2815			B	
Medium beam angle: 34°										
Luga C 115 27K	559389	warm white	2700	1170	–	1645	34	82	A	A+
	559398			1170	1545	2160			B	
Luga C 115 30K	559392	warm white	3000	1250	–	1755	34	85	A	A+
	559401			1250	1650	2310			B	
Luga C 115 40K	559395	neutral white	4000	1325	–	1860	34	85	A	A++
	559404			1325	1760	2460			B	A+
Luga C 115 30K	559413	warm white	3000	1045	–	1465	34	95	A	A+
	559419			1045	1380	1930			B	
Wide beam angle: 48°										
Luga C 115 27K	559390	warm white	2700	1210	–	1110	48	82	A	A+
	559399			1210	1600	1460			B	
Luga C 115 30K	559393	warm white	3000	1295	–	1185	48	85	A	A+
	559402			1295	1710	1560			B	
Luga C 115 40K	559396	neutral white	4000	1375	–	1260	48	85	A	A++
	559405			1375	1820	1660			B	A+
Luga C 115 30K	559414	warm white	3000	1080	–	990	48	95	A	A+
	559420			1080	1430	1310			B	

Versions with white reflector for extra wide beam angle on request | * Production tolerance of luminous flux, voltage and power consumption: ±10%

ActiveLine LUGA C

Technical notes

Reflector: Ø 50 mm

Max operating temperature at t_p point: 85 °C

Lumen maintenance:

L90/B10; 50,000 hrs. at 65 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM;

after 50,000 hrs. operating time: 4 SDCM



Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 200 mm

With integrated cord grip

Weight: 145 g

Packaging unit: 45 pcs.

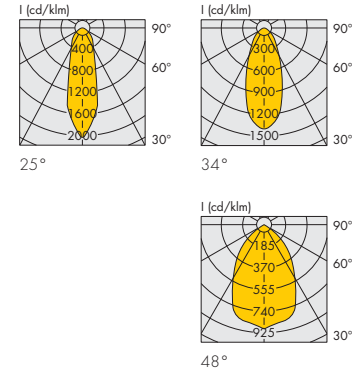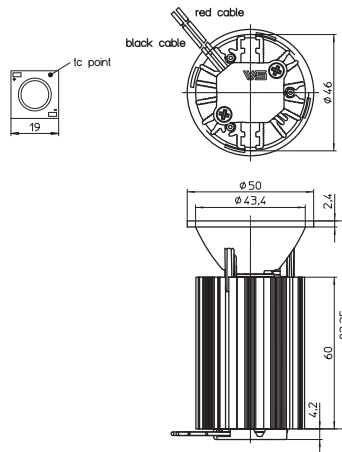

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{yp.}$) and power consumption (P_{el}) * 350 mA lm	Light intensity at max. current Candela	Beam angle °	CRI R_a	Energy efficiency at max. current
Narrow beam angle: 25°				$P_{el} = 10.2 \text{ W}$, $U_{yp.} = 29.2 \text{ V}$				
Luga C 104 27K	559379	warm white	2700	1020	2050	25	82	A+
Luga C 104 30K	559382	warm white	3000	1080	2170	25	85	A+
Luga C 104 40K	559385	neutral white	4000	1160	2330	25	85	A++
Luga C 104 30K	559406	warm white	3000	914	1850	25	95	A+
Medium beam angle: 34°								
Luga C 104 27K	559380	warm white	2700	1005	1410	34	82	A+
Luga C 104 30K	559383	warm white	3000	1065	1495	34	85	A+
Luga C 104 40K	559386	neutral white	4000	1145	1610	34	85	A++
Luga C 104 30K	559407	warm white	3000	905	1270	34	95	A+
Wide beam angle: 48°								
Luga C 104 27K	559381	warm white	2700	1045	955	48	82	A+
Luga C 104 30K	559384	warm white	3000	1105	1010	48	85	A+
Luga C 104 40K	559387	neutral white	4000	1190	1090	48	85	A++
Luga C 104 30K	559408	warm white	3000	940	860	48	95	A+

Versions with white reflector for extra wide beam angle on request | * Production tolerance of luminous flux, voltage and power consumption: $\pm 10\%$

ActiveLine 9.1 & 7.1

Technical notes

Reflector: Ø 50 mm

Max. operating temperature at t_p point: 85 °C

Lumen maintenance: L90/B30; 50,000 hrs. at 70 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Heat sink material: aluminium

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 200 mm

With integrated cord grip

Weight: 145/95 g (9.1/7.1)


Packaging unit: 45 pcs.




ActiveLine 9.1




ActiveLine 7.1

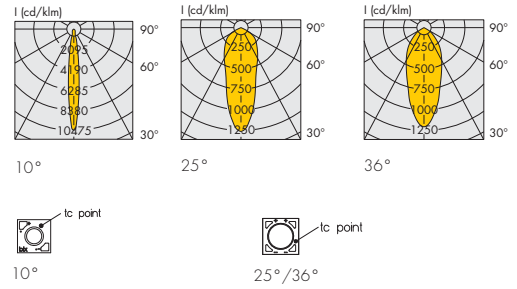

ActiveLine 9.1

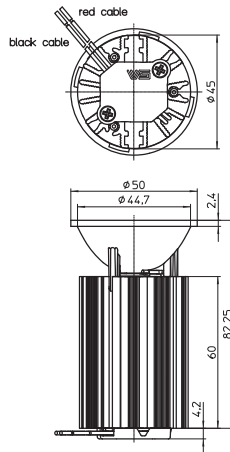

ActiveLine 7.1

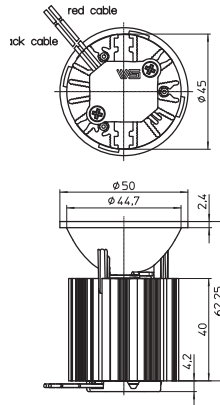

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el}) * 350 mA 500 mA lm lm		Light intensity at max. current Candela	Beam angle °	CRI R_a	Energy efficiency at max. current
Extra narrow beam angle: 10°				$P_{el} = 5.9 \text{ W}, U_{typ.} = 16 \text{ V}$ $P_{el} = 8.6 \text{ W}, U_{typ.} = 17 \text{ V}$					
ActiveLine 9.1 27K	561856	warm white	2700	525	710	7000	10	80	A+
ActiveLine 7.1 27K	561763			525	—	5500			
ActiveLine 9.1 30K	561857	warm white	3000	565	750	8000	10	80	A+
ActiveLine 7.1 30K	561764			565	—	6100			
ActiveLine 9.1 40K	561858	neutral white	4000	600	795	8800	10	80	A+
ActiveLine 7.1 40K	561765			600	—	6500			
Narrow beam angle: 25°				$P_{el} = 6.2 \text{ W}, U_{typ.} = 17.8 \text{ V}$ $P_{el} = 9.3 \text{ W}, U_{typ.} = 18.5 \text{ V}$					
ActiveLine 9.1 27K	559442	warm white	2700	580	780	1400	25	80	A+
ActiveLine 7.1 27K	559436			580	—	1000			
ActiveLine 9.1 30K	559444	warm white	3000	615	825	1430	25	80	A+
ActiveLine 7.1 30K	559438			615	—	1075			
ActiveLine 9.1 40K	559446	neutral white	4000	645	865	1540	25	80	A++
ActiveLine 7.1 40K	559440			645	—	1150			
Medium beam angle: 36°				$P_{el} = 6.2 \text{ W}, U_{typ.} = 17.8 \text{ V}$ $P_{el} = 9.3 \text{ W}, U_{typ.} = 18.5 \text{ V}$					
ActiveLine 9.1 27K	559443	warm white	2700	580	780	1150	36	80	A+
ActiveLine 7.1 27K	559437			580	—	865			
ActiveLine 9.1 30K	559445	warm white	3000	615	825	1220	36	80	A+
ActiveLine 7.1 30K	559439			615	—	925			
ActiveLine 9.1 40K	559447	neutral white	4000	645	865	1350	36	80	A++
ActiveLine 7.1 40K	559441			645	—	1010			

Versions with white reflector for extra wide beam angle on request | * Production tolerance of luminous flux, voltage and power consumption: $\pm 10\%$

ActiveLine 6.1

Technical notes

Reflector: Ø 50 mm

Max. operating temperature at t_p point: 85 °C

Lumen maintenance:

L90/B30; 50,000 hrs. at 70 °C

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Heat sink material: aluminium



Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 200 mm

With integrated cord grip

Weight: 95 g

Packaging unit: 45 pcs.

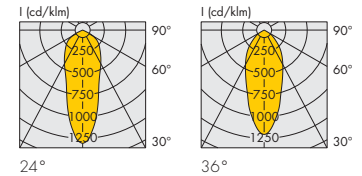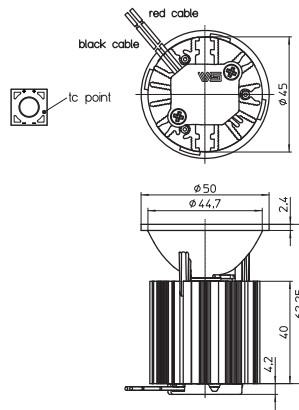

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and typical voltage ($U_{typ.}$) and power consumption (P_{el}) *	Light intensity at max. current Candela	Beam angle °	CRI R_a	Energy efficiency at max. current
Narrow beam angle: 24°				$P_{el} = 6.8 \text{ W}$, $U_{typ.} = 19.4 \text{ V}$				
ActiveLine 6.1 27K	559430	warm white	2700	520	950	24	80	A+
ActiveLine 6.1 30K	559432	warm white	3000	550	1010	24	80	A+
ActiveLine 6.1 40K	559434	neutral white	4000	575	1050	24	80	A+
Medium beam angle: 36°								
ActiveLine 6.1 27K	559431	warm white	2700	520	800	36	80	A+
ActiveLine 6.1 30K	559433	warm white	3000	550	870	36	80	A+
ActiveLine 6.1 40K	559435	neutral white	4000	575	950	36	80	A+

Versions with white reflector for extra wide beam angle on request | * Production tolerance of luminous flux, voltage and power consumption: ±10%

LEDSpot ActiveLine HALO (3000-2000 K)

Built-in LEDSpot equipped with a reflector, heat sink, leads and plug

Technical Notes

Reflector: Ø 50 mm

Heat sink material: aluminium

Allowed operating temperature at t_c point: -40 to 85 °C

Lumen maintenance:

L90/B50; 50,000 hrs. at 70 °C

Temperature depends on installation situation and

has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Use of external LED constant-current drivers

With analogue dimming function (no PWM)

Plastic opaque cover to protect reflector

(clear cover on request)


Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 200 mm, with plug

With integrated cord grip

Weight: 145/260 g (A/B)

Packaging unit: 45/24 pcs. (A/B)

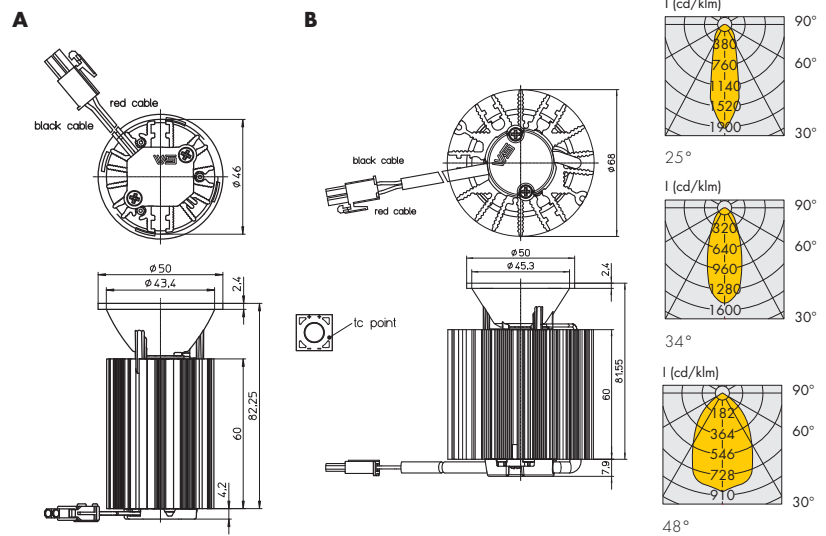

Electrical characteristics

at $t_j = 25$ °C

Type	Ref. No.	Voltage DC* (V)						Power consumption* (W)					
		50 mA			350 mA			50 mA			350 mA		
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.
ActiveLine HALO 6.6 W	all	12	14.3	15.6	17.5	18.8	20.5	0.6	0.72	0.78	6.2	6.6	7.2
ActiveLine HALO 12.8 W	all	26.4	31	34.1	31	36.5	40.2	1.3	1.6	1.7	10.9	12.8	14.1

Optical characteristics

Type	Ref. No.	Colour	Typ. luminous flux* (lm) and correlated colour temperature (K)		Light intensity at max. current Candela	Beam angle °	CRI R_a	Drawing	Energy efficiency at max. current
			50 mA lm/K	350 mA lm/K					
ActiveLine HALO 6.6 W			$P_{el} = 0.7$ W; $V_f = 14.3$ V		$P_{el} = 6.6$ W; $V_f = 18.8$ V				
ActiveLine HALO 6.6 W	561865	warm white	46lm/2000K	525lm/2800K	1000	25	90	A	A+
ActiveLine HALO 6.6 W	561866	warm white	45lm/2000K	515lm/2800K	775	34	90	A	A+
ActiveLine HALO 6.6 W	561867	warm white	47lm/2000K	530lm/2800K	480	48	90	A	A+
ActiveLine HALO 12.8 W			$P_{el} = 1.6$ W; $V_f = 31$ V		$P_{el} = 12.8$ W; $V_f = 36.5$ V				
ActiveLine HALO 12.8 W	559962	warm white	93lm/2000K	890lm/3000K	1800	25	90	B	A
ActiveLine HALO 12.8 W	559963	warm white	91lm/2000K	870lm/3000K	1300	34	90	B	A
ActiveLine HALO 12.8 W	559645	warm white	95lm/2000K	900lm/3000K	835	48	90	B	A

Versions with white reflector for extra wide beam angle on request | * Production tolerance of luminous flux, voltage and power consumption: $\pm 10\%$

ActiveLine Quad

Technical notes

Optics: Ø 50 mm



Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 300 mm

ESD protection class 2

Weight: 90 g

Packaging unit: 45 pcs.

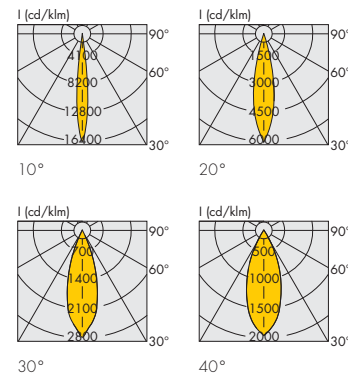

Type	Description	Ref. No.		Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el})*						Light intensity at max. current Candela	Beam angle °	Energy efficiency at max. current	
		with plug	without plug			350 mA		500 mA		700 mA					
						min.	typ.	min.	typ.	min.	typ.				
						P _{el} = 3.99 W U _{typ.} = 11.4 V		P _{el} = 5.8 W U _{typ.} = 11.6 V		P _{el} = 8.5 W U _{typ.} = 12.1 V					
LEDSpot ActiveLine Quad 10°															
LR4W	Quad XTE 3000K bin Q3	547794	547790	warm white	2870...3200	338	373	450	496	601	663	10000	10	A	
LR4W	Quad XTE 4000K bin Q4	549917	548864	neutral white	3700...4260	360	398	479	529	640	707	10600	10	A+	
LR4W	Quad XPE 6300K bin Q4	547802	547798	cool white	5650...6950	360	398	468	517	612	676	10200	10	A+	
LEDSpot ActiveLine Quad 20°															
LR4W	Quad XTE 3000K bin Q3	547793	547789	warm white	2870...3200	338	373	450	496	601	663	3100	20	A	
LR4W	Quad XTE 4000K bin Q4	549916	547940	neutral white	3700...4260	360	398	479	529	640	707	3300	20	A+	
LR4W	Quad XPE 6300K bin Q4	547801	547797	cool white	5650...6950	360	398	468	517	612	676	3150	20	A+	
LEDSpot ActiveLine Quad 30°															
LR4W	Quad XTE 3000K bin Q3	547792	547788	warm white	2870...3200	338	373	450	496	601	663	1600	30	A	
LR4W	Quad XTE 4000K bin Q4	549915	548863	neutral white	3700...4260	360	398	479	529	640	707	1700	30	A+	
LR4W	Quad XPE 6300K bin Q4	547800	547796	cool white	5650...6950	360	398	468	517	612	676	1630	30	A+	
LEDSpot ActiveLine Quad 40°															
LR4W	Quad XTE 3000K bin Q3	547791	547726	warm white	2870...3200	338	373	450	496	601	663	1100	40	A	
LR4W	Quad XTE 4000K bin Q4	549914	547837	neutral white	3700...4260	360	398	479	529	640	707	1180	40	A+	
LR4W	Quad XPE 6300K bin Q4	547799	547795	cool white	5650...6950	360	398	468	517	612	676	1130	40	A+	

Emission data at $t_j = 85^\circ\text{C}$ | *Production tolerance of luminous flux, voltage and power consumption: $\pm 7\%$

LEDSpots

Complete LEDSpot equipped with optics, heat sink, leads and frame

As the perfect replacement for halogen lamps, these LED modules are ideal for use in furniture, false ceilings as well as cooker hoods.

These LED modules are available with high-power LEDs and different optics attachments. The circular or square metal frame is available in a white, silver, matt silver or gold finish. Furthermore, flexible snap-in fasteners make it extremely easy and quick to exchange halogen spots, which are still in wide-spread use.

The package is rounded off by a matching LED driver housed in a compact casing plus a set of cables with pre-assembled plugs for connecting up to five LED modules.

LEDSpot IPLine

Metal frame, round
For cut-out: Ø 56 mm
Colour accuracy initially: 3 SDCM
Degree of protection: IP54
CRI: 80

LEDSpot SmartLine

Metal frame, round or square
For cut-out: Ø 56 mm
Colour accuracy initially: 3 SDCM
Degree of protection: IP40
CRI: 80

LEDSpot StartLine

Resin or steel frame, round
For cut-out: Ø 56 mm
Colour accuracy initially: 3 SDCM
Degree of protection: IP20
CRI: 80

LEDSpot FlatLine

Metal frame, round
For cut-out: Ø 56 mm
Degree of protection: IP20 (front part IP67)
CRI: 80



Surface Kit with mounted LEDSpot

Metal frame to use IPLine, SmartLine, StartLine or FlatLine as surface mounting spots
Dimensions (ØxH): Ø 67 x 30 mm
Degree of protection: IP20

LEDSpot DisLine

Metal frame, round
For cut-out: Ø 56 mm
Colour accuracy initially: 3 SDCM
Degree of protection: IP40
CRI: 80

LEDSpot EffectLine

Metal frame, round or square
For cut-out: Ø 37 mm
Colour accuracy initially: 3 SDCM
Degree of protection: IP20
CRI: 80

LEDSpot sets

You will receive complete sets that contain the desired number of LEDSpots, a respective number of cable sets and the required LED drivers

Lead sets for LEDSpots

Lead sets with connector for easy and fast connection

1

2

3

4

5

6

7

8

9

10

11

12

LEDSpot IPLine

Complete LEDSpot IP54 equipped with optics, heat sink, leads and metal frame

Technical notes

Metal frame, round

For cut-out: Ø 56 mm

LEDSpot with one LED and with thermoplastic heat sink

Reflector with clear glass (opaque glass on request)

Beam angle: 30° or 50° (LCH-022), 40° (LCH-023)

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 250 mm


Use of external LED constant-current drivers

Snap-in clips for easy installation



Degree of protection: IP54

Weight: 50 g

Packaging unit: 45 pcs.

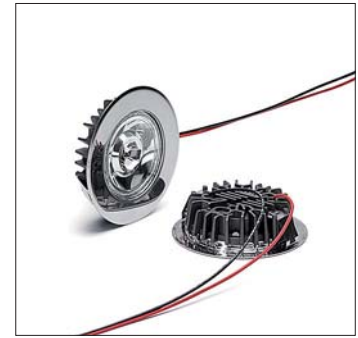

LCH-022 / LCH-023

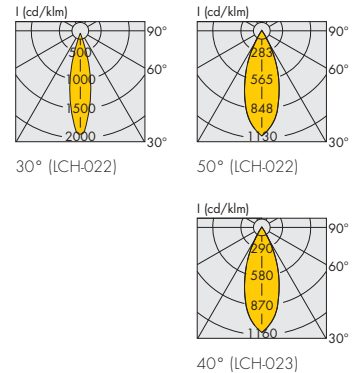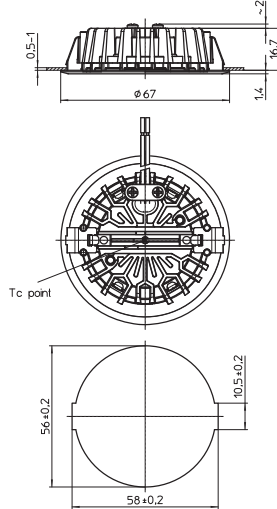

Type	Description	LEDSpot version	Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el})*						Light intensity at max. current Candela		Beam angle °	Energy efficiency at max. current
					350 mA		500 mA		700 mA		30°	50°		
					min.	typ.	min.	typ.	min.	typ.				
LEDSpot IPLine (LCH-022)					P _{el} = 1.02 W U _{typ.} = 2.9 V		P _{el} = 1.5 W U _{typ.} = 3 V		P _{el} = 2.16 W U _{typ.} = 3.09 V					
LCH-022	IPLine 219 3000K	A	warm white	2870...3200	90	100	130	140	170	180	320	190	30/50	A++
LCH-022	IPLine 219 4500K	B	neutral white	4250...4750	100	110	140	150	180	190	390	210	30/50	A++
LEDSpot IPLine COB (LCH-023)					P _{el} = 3.5 W U _{typ.} = 10 V						40°			
LCH-023	IPLine COB 3000K	C	warm white	2920...3070	250	285	–	–	–	–	330	–	40	A+
LCH-023	IPLine COB 4200K	D	neutral white	3850...4650	263	300	–	–	–	–	380	–	40	A++

Emission data at t_i = 85 °C (LCH-022) / 25 °C (LCH-023) | Further colour temperatures on request

* Production tolerance of luminous flux, voltage and power consumption: ±7 % (LCH-022) / ±5 % (LCH-023)

	LCH-022				LCH-023	
	Ref. No.		Ref. No.		Ref. No.	Ref. No.
Frame colour	A (warm white)		B (neutral white)		C (warm white)	D (neutral white)
	30°	50°	30°	50°	40°	40°
silver	561770	561772	561774	561776	552089	552091
white	561771	561773	561775	561777	552088	552090

Silver brushed or further colours on request

LEDSpot SmartLine COB

Complete LEDSpot equipped with optics, heat sink, leads and metal frame

Technical notes

Metal frame, round or square

For cut-out: Ø 56 mm

LEDSpot with one LED and with an aluminium heat sink

Beam angle: 40°

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 250 mm

Use of external LED constant-current drivers

Snap-in clips for easy installation

for luminaire sheets (type LCH-017 and -020)

for ceilings (type LCH-019 and -021)



Degree of protection: IP40

Weight: 60 g


Packaging unit:

45 pcs. (type LCH-017 and -020)



40 pcs. (type LCH-019 and -021)

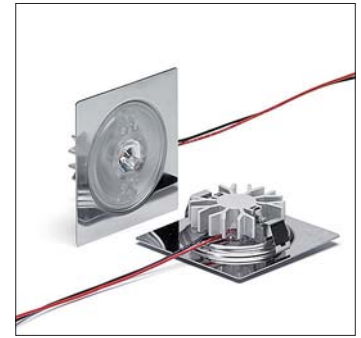


LCH-017




LCH-019



LCH-020

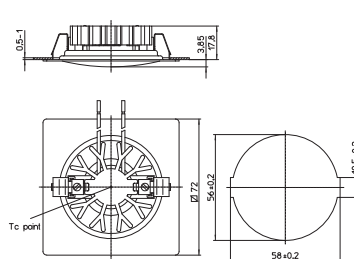

LCH-021



Type	Description	LEDSpot Version		Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el.})*		Light intensity at max. current Candela	Frame shape		Energy efficiency at max. current
		for luminaire sheets	ceilings			min.	typ.		round	square	
						P _{el.} = 3.5 W, U _{typ.} = 10 V					
All types	Smart COB 3000K 40°	A	C	warm white	2920...3070	250	285	330	round	square	A+
All types	Smart COB 4200K 40°	B	D	neutral white	3850...4650	263	300	380	round	square	A+

Emission data at t_c = 25 °C | *Production tolerance of luminous flux, voltage and power consumption: ±5% | Further colour temperatures on request

Frame colour	For luminaire sheets (LCH-017 and LCH-020)				For ceilings (LCH-019 and LCH-021)			
	Ref. No. A (warm white)		Ref. No. B (neutral white)		Ref. No. C (warm white)		Ref. No. D (neutral white)	
	round	square	round	square	round	square	round	square
silver	548912	548928	548916	548932	548920	548936	548924	548940
silver mat	548913	—	548917	—	548921	—	548925	—
white	548915	548931	548919	548935	548923	548939	548927	548943

Silver brushed or further colours on request

LEDSpot SmartLine

Complete LEDSpot equipped with optics, heat sink, leads and metal frame

Technical notes

Metal frame, round or square

For cut-out: Ø 56 mm

LEDSpot with one LED and with thermoplastic heat sink

Optics beam angle: 50°

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 250 mm

Use of external LED constant-current drivers

Snap-in clips for easy installation

for luminaire sheets (type LCH-002 and -008)

for ceilings (type LCH-004 and -009)


Degree of protection: IP40

Weight: 55 g


Packaging unit:

45 pcs. (Type LCH-002 and -008)


40 pcs. (Type LCH-004 and -009)

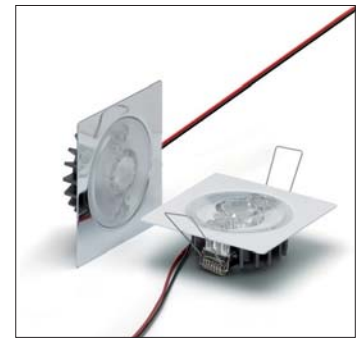


LCH-002




LCH-004



LCH-008

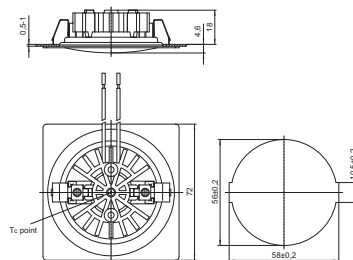

LCH-009

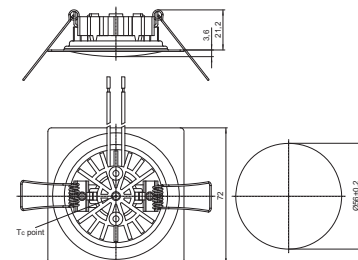

Type	Description	LEDSpot version		Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el})*						Light intensity at max. current Candela	Frame shape		Energy efficiency at max. current
		for luminaire sheets	ceilings			350 mA min.	500 mA min.	700 mA min.	typ.	typ.	typ.		round	square	
All	Smart COB 3000K 40°	A	C	warm white	2870...3200	90	100	130	140	170	180	230	round	square	A++
All	Smart COB 4200K 40°	B	D	neutral white	4250...4750	100	110	140	150	180	190	270	round	square	A++

Emission data at $t_f = 85^\circ\text{C}$ | * Production tolerance of luminous flux, voltage and power consumption: $\pm 7\%$ | Further colour temperatures on request

Frame colour	For luminaire sheets (LCH-002 and LCH-008)				For ceilings (LCH-004 and LCH-009)			
	Ref. No. A (warm white)		Ref. No. B (neutral white)		Ref. No. C (warm white)		Ref. No. D (neutral white)	
	round	square	round	square	round	square	round	square
silver	561778	561781	561783	561786	561788	561791	561794	561797
silver mat	561779	—	561809	—	561789	—	561795	—
white	561780	561782	561785	561787	561790	561792	561796	561798

Silver brushed or further colours on request



LEDSpot StartLine

Complete LEDSpot equipped with optics, heat sink, leads and frame

Technical notes

- Steel frame: round
- For cut-out: Ø 56 mm
- LEDSpot with one LED and with thermoplastic heat sink
- Optics beam angle: 20° or 40°
- Leads: Cu tinned, stranded conductors 0.5 mm², PVC-insulation, length: 250 mm
- Use of external LED constant-current drivers
- Snap-in clips for easy installation
- Degree of protection: IP20
- Weight: 40 g
- Packaging unit: 45 pcs.

LCH-016

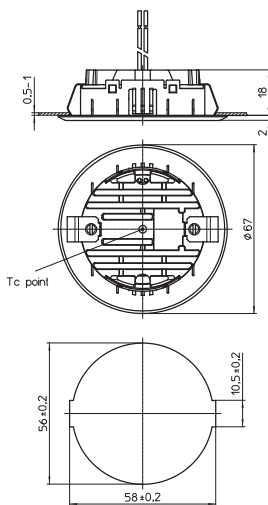

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Type	Description	LEDSpot version	Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el.})*						Light intensity at max. current Candela		Energy efficiency at max. current
					350 mA		500 mA		700 mA		20°	40°	
					min.	typ.	min.	typ.	min.	typ.			
LCH-016	Start 219 3000K	A	warm white	3000	90	100	130	140	170	180	550	190	A++
LCH-016	Start 219 4500K	B	neutral white	4500	100	110	140	150	180	190	580	250	A++

Emission data at $t_i = 85\text{ °C}$ | * Production tolerance of luminous flux, voltage and power consumption: $\pm 7\%$ | Further colour temperatures on request

Frame colour	Ref. No. A (warm white)		Ref. No. B (neutral white)	
	20°	40°	20°	40°
silver	561799	561801	561803	561805
white	561800	561802	561804	561807

Silver brushed or further colours on request

LEDSpot FlatLine

Complete LEDSpot equipped with optics, leads and frame

Technical notes

Metal frame: silver, round

For cut-out: Ø 56 mm

LEDSpot with 5 LEDs (LCH027) or 6 LEDs (LCH028)

Beam angle: 40°






With connector

Snap-in clips for easy installation

Degree of protection: IP20 (Front part: IP67)

Weight: 40

Packaging unit: 45 pcs.

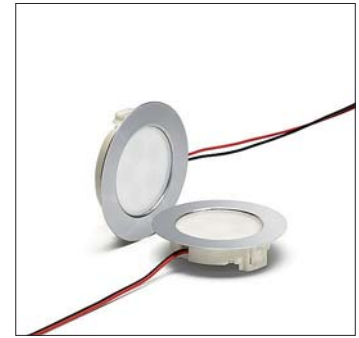

Constant current

Type	Description	Ref. No.	Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el})*			Light intensity at max. current Candela 40°	Energy efficiency at max. current
					350 mA typ.	500 mA typ.	700 mA typ.		
					P _{el} = 1 W U _{typ.} = 2.88 V	P _{el} = 1.5 W U _{typ.} = 3 V	P _{el} = 2.2 W U _{typ.} = 3.1 V		
LCH-027 – 5 LEDs									
LCH027	Flat 757D 3000K bin min P9	561580	warm white	2870...3200	101	135	190	160	A++
LCH027	Flat 757D 4000K bin min P9	561582	neutral white	3850...4250	105	140	195	220	A++

Emission data at $t_j = 85^\circ\text{C}$ | * Production tolerance of luminous flux, voltage and power consumption: $\pm 7\%$ | Further colour temperatures on request

Constant voltage 12 V


Type	Description	Ref. No.	Colour	Correlated colour temperature K	Typ luminous flux* lm	Light intensity Candela	Max. power consumption W	Energy efficiency
LCH-028 – 6 LEDs								
LCH028	Flat 2835 3000K bin min P9	561588	warm white	2870...3200	100	90	1.7	A+
LCH028	Flat 2835 4000K bin min P9	561590	neutral white	3850...4250	100	100	1.7	A+

Emission data at $t_j = 85^\circ\text{C}$ | * Production tolerance of luminous flux: $\pm 7\%$ | Further colour temperatures on request

Cable set

Length: 250 mm

Ref. No.: 561868



Surface Kit with Mounted LEDSpot

Metal frame to use ILine, SmartLine, StartLine or FlatLine as surface mounting spots
 Two single pole terminals for electrical connection inside the kit (frame + spot)
 Fixation by self tapping screws
 Packaging unit: 90 pcs.

Ref. No.: 554845 Frame colour: white

Ref. No.: 554843 Frame colour: silver

Surface Kit with LEDSpot StartLine

Colour temperature: 3000 K

Beam angle: 40°


Packaging unit: 1 pcs.

Type: StartLine SFK LCH016

Ref. No.: 559621 Frame colour: white

Ref. No.: 557157 Frame colour: silver

Technical details LEDSpots see page 131

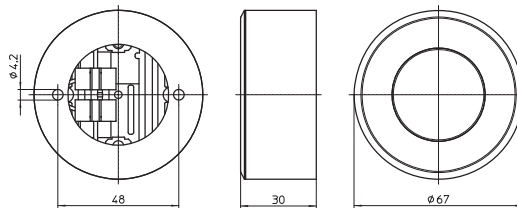

Frame



Surface Kit with LEDSpot SmartLine

Colour temperature: 3000 K

Beam angle: 50°


Packaging unit: 1 pcs.

Type: SmartLine SFK LCH002

Ref. No.: 557158 Frame colour: white

Ref. No.: 559622 Frame colour: silver

Technical details LEDSpots see page 130

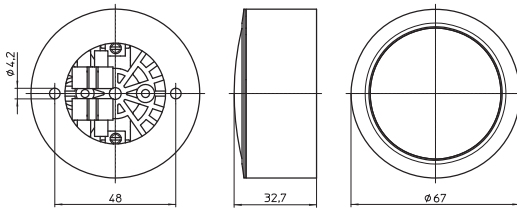

Surface Kit with LEDSpot IPLine

Colour temperature: 4500 K

Beam angle: 30°


Packaging unit: 1 pcs.

Type: IPLine SFK LCH022

Ref. No.: 559624 Frame colour: white

Ref. No.: 559623 Frame colour: silver

Technical details LEDSpots see page 128

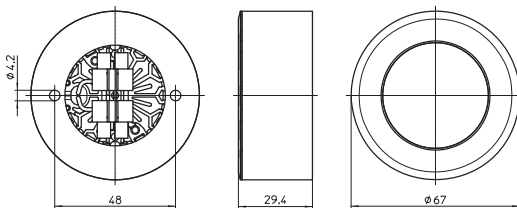

Surface Kit with LEDSpot FlatLine

Colour temperature: 3000 K

Beam angle: 40°


Packaging unit: 1 pcs.

Type: FlatLine SFK LCH027 (700 mA)

Ref. No.: 561870 Frame colour: white

Ref. No.: 561871 Frame colour: silver

Technical details LEDSpots see page 132

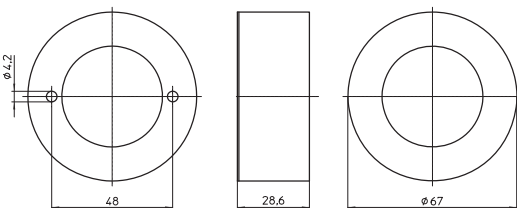

1

2

3

4

5

6

7

8

9

10

11

12

Surface Kit with Mounted LEDSpot

Description	Ref. No.		Colour	Correlated colour temp. (K)	Luminous flux* (lm)			Light intensity at max. current (Cd)	Beam angle °	Energy efficiency at max. current
	Frame colour				350 mA typ.	500 mA typ.	700 mA typ.			
					$P_{el} = 1.02 \text{ W}$ $U_{typ.} = 2.9 \text{ V}$	$P_{el} = 1.5 \text{ W}$ $U_{typ.} = 3 \text{ V}$	$P_{el} = 2.16 \text{ W}$ $U_{typ.} = 3.09 \text{ V}$			
StartLine SFK LCH016										
StartLine 219 3000K Bin	557157	559621	warm white	2870...3200	100	140	180	190	40	A++
SmartLine SFK LCH002										
SmartLine 219 3000K Bin	559622	557158	warm white	2870...3200	100	140	180	230	50	A++
IPLine SFK LCH002										
IPLine 219 4500K Bin	559623	559624	neutral white	4250...4750	110	150	190	390	30	A++
					$P_{el} = 1 \text{ W}$ $U_{typ.} = 2.88 \text{ V}$	$P_{el} = 1.5 \text{ W}$ $U_{typ.} = 3 \text{ V}$	$P_{el} = 2.2 \text{ W}$ $U_{typ.} = 3.1 \text{ V}$			
FlatLine SFK LCH027										
FlatLine 757D 4000K bin min P9	561871	561870	neutral white	3850...4250	105	140	195	220	40	A++

Emission data at $t_1 = 85 \text{ °C}$ | * Measurement tolerance of luminous flux: $\pm 7\%$

LEDSpot DisLine

Complete LEDSpot equipped with optics, heat sink, leads and metal frame

Technical notes

Metal frame, round

For cut-out: Ø 56 mm

LEDSpot with one LED and with thermoplastic heat sink

Reflector with clear glass (opaque glass on request)

Beam angle: 30° or 50°

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 250 mm

Use of external LED constant-current drivers

Snap-in clips for easy installation

for luminaires sheets (type LCH-006)

for ceilings (type LCH-007)


Degree of protection: IP40

Weight: 50 g





Packaging unit: 45 pcs. (type LCH-006)

40 pcs. (type LCH-007)

LCH-006

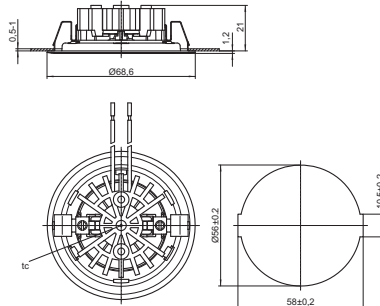

LCH-007

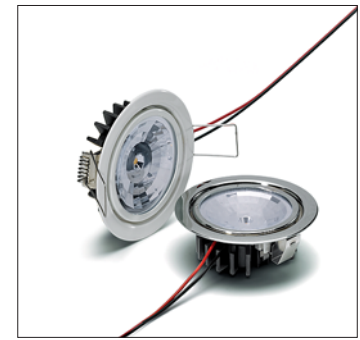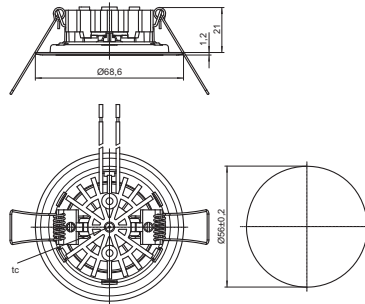

Type	Description	LEDSpot version		Colour	Correlated colour temperature K	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el.})*				Light intensity at max. current		Energy efficiency at max. current		
		for luminaire sheet	ceilings			min.	typ.	min.	typ.	min.	typ.		30°	50°
						P _{el.} = 1.02 W		P _{el.} = 1.5 W		P _{el.} = 2.16 W				
						U _{typ.} = 2.9 V		U _{typ.} = 3 V		U _{typ.} = 3.09 V				
All types	Disc 219 3000K	A	C	warm white	3000	90	100	130	140	170	180	320	190	A++
All types	Disc 219 4500K	B	D	neutral white	4500	100	110	140	150	180	190	390	210	A++

Emission data at t_i = 85 °C | *Production tolerance of luminous flux, voltage and power consumption: ±7% | Further colour temperatures on request

Frame colour	For luminaire sheets (LCH-006)				For ceilings (LCH-007)			
	Ref. No. A (warm white)		Ref. No. B (neutral white)		Ref. No. C (warm white)		Ref. No. D (neutral white)	
	30°	50°	30°	50°	30°	50°	30°	50°
silver	561836	561844	561846	561849	561851	561854	561861	561863
white	561842	561845	561848	561850	561853	561855	561862	561864

Silver brushed or further colours on request

LEDSpot EffectLine

Complete LEDSpot equipped with optics, heat sink, leads and metal frame

Technical notes

Metal frame, round or square

For cut-out: Ø 37 mm

LEDSpot with one LED and with thermoplastic heat sink

Beam angle: 8°, 16°, 26° or 45°

Leads: Cu tinned, stranded conductors AWG22,

PVC-insulation, length: 250 mm

Use of external LED constant-current drivers


Snap-in clips for easy installation

Degree of protection: IP20



Weight: 40 g

Packaging unit: 45 pcs.

LCH-010



LCH-011

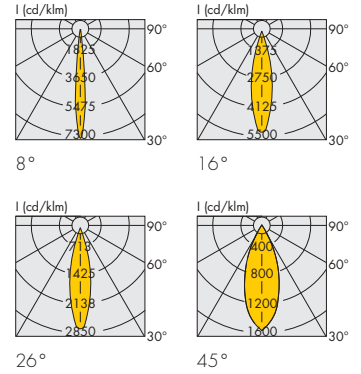

Type	Description	LEDSpot version	Colour	Correlated colour temperature	Luminous flux (lm) and typical voltage (U _{typ.}) and power consumption (P _{el})*						Light intensity at max. current				Energy efficiency at max. current
					350 mA		500 mA		700 mA		Candela		8°	16°	
					min.	typ.	min.	typ.	min.	typ.					
					P _{el} = 1.02 W		P _{el} = 1.5 W		P _{el} = 2.16 W						
					U _{typ.} = 2.9 V		U _{typ.} = 3 V		U _{typ.} = 3.09 V						
All types	Effect 219 3000K	A	warm white	3000	90	100	130	140	170	180	1200	450	500	300	A++
All types	Effect 219 4500K	B	neutral white	4500	100	110	140	150	180	190	1250	1100	560	330	A++

Emission data at $t_i = 85^\circ\text{C}$ | *Production tolerance of luminous flux, voltage and power consumption: $\pm 7\%$

Frame colour	Ref. No. A (warm white)								Ref. No. B (neutral white)							
	round				square				round				square			
	8°	16°	26°	45°	8°	16°	26°	45°	8°	16°	26°	45°	8°	16°	26°	45°
silver	566143	561808	566146	566148	566150	566152	566154	566156	566158	566160	566162	566164	566166	566168	561831	561834
white	566144	566145	566147	566149	566151	566153	566155	566157	566159	566161	566163	566165	566167	566169	561833	561835

Silver brushed or further colours on request

LEDSpot Sets

On request, you will receive complete sets that contain the desired number of LEDSpots, a respective number of cable sets and the required LED drivers. Several examples of such sets can be seen to the right.

Contact us - we will gladly support you when it comes to dimensioning your lighting application.



Set 1



Set 2



Set 3



Set 4



Set 5



Set 6



Set 7



Set 8

Set No.	Ref. No.	Sets includes	Frame*	Driver	Lead set	
ActiveLine Pro Kit						
1	561726	1 piece ActiveLine 9.1 3000 K 36°	round	186349	inclusive	
2	561728	1 piece ActiveLine 6.1 3000 K 36°		186341		
3	561729	2 pieces ActiveLine 6.1 3000 K 36°		186431		
ActiveLine Pro Kit - dimmable						
4	561734	1 piece ActiveLine 9.1 3000 K 36°	round	186448	inclusive	
5	561731	2 pieces ActiveLine 6.1 3000 K 36°		186415		
GU10 Kit - dimmable						
6	561732	6 W GU10 LED lamp, dimmable + frame + lampholder with connection box (3 poles terminal block)	round	silver brushed	-	inclusive
StartLine						
7	554535	2 pieces StartLine 3000 K 40°	round	white	186348	inclusive
FlatLine						
8	561733	2 pieces FlatLine 700 mA, 3000 K 40°	round	silver	186348	inclusive

* Square shape or other colours on request

1

2

3

4

5

6

7

8

9

10

11

12

Lead Sets

For LEDSpots with connectors

Lead sets with connector

for easy and fast connection

Connector material: PA, natural, UL94V-0

Leads: Cu tinned, stranded conductors 0.5 mm²,

PVC-insulation, with connector,

lead ends: ferrules on bare end of core

Lead sets

Lead sets with connector and lead ends

Leads: H03WH2-F

Weight: 18/36/58/72/90 g

Packaging unit: 10 pcs.

Ref. No.: 545029 with 1 connector


Ref. No.: 546388 with 2 connectors

Ref. No.: 545315 with 3 connectors


Ref. No.: 554929 with 4 connectors

Ref. No.: 545316 with 5 connectors


545029




546388

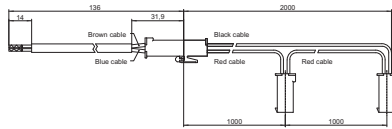


545315

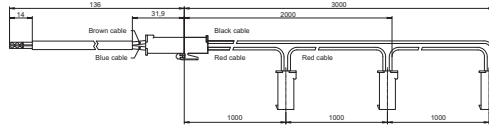

554929

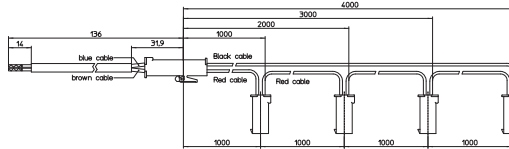

545316

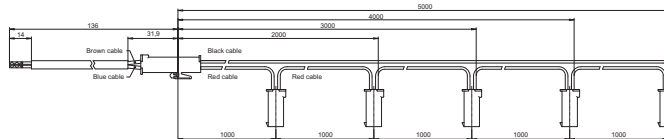

545029



546388

LEDLINE ECX

ELECTRONIC CONSTANT CURRENT DRIVERS



LED CONSTANT CURRENT DRIVERS

Electronic converters for LED modules operated with constant current

To ensure the safe operation of LEDs that are wired in series, the operating current must be limited to a constant value by the LED driver.

Light-emitting diodes are semiconductor devices with a light-emitting p-n junction. Due to the specific diode characteristics, the current can only flow through an LED in one direction. Coupled with the special properties of a semiconductor, this non-linear behaviour can increase the current and power uptake of an LED as it heats up.

If this effect is not limited, uncontrolled heating can finally destroy the semiconductor junction. For this reason, VS recommends using an external constant current driver to operate all constant current driven LED modules. To ensure that the same current flows through every LED, constant current driven LED modules can only be wired in series.

The constant current source has to be selected to suit the respective application, i.e. it must supply the required current and also provide sufficient voltage for the LED string.

The number of VS LED modules that can be connected to a single operating device is dependent on the forward voltage of the respective modules.

LEDLine ECX

- OVERLOAD PROTECTION
- SHORT CIRCUITING PROTECTION
- SELV OR SELV EQUIVALENT

Product Classification and Overview of LED Drivers

The electronic constant current drivers are optimised to operate constant current driven LED modules. Before connecting LED modules ensure that the power supply is disconnected from mains.

Most drivers are designed for DC-operation (mains frequency: 0 Hz) and can be used for emergency power supplies.

Primeline	ComfortLine	EasyLine
Programmability	Convenient	Focus on core functions
Intelligent functions	Intelligent functions	Cost-efficient
Maximum flexibility	Up to 100,000 hrs. expected service life time	Up to 50,000 hrs. expected service life time

Product overview by main application fields									
Main application field	Capacity range W	Output current DC mA	Output voltage DC V	Ref. No.	Version	Current setting	Dimming	Max. service life time (hrs.)	Page
Office	6/10/14	150/250/350	17-40	186530	Easyline	Push-in terminal	–	50,000	153
	15	350	2-40	186229	ComfortLine	–	–	100,000	151
	15/18/21	500/600/700	17-30	186529	Easyline	Push-in terminal	–	50,000	153
	27.5/33/38.5	125/150/175	110-220*	186486	ComfortLine	Push-in terminal	–	100,000	147
	28.5	500	19-57	186554	ComfortLine	–	–	100,000	152
	4x9	4x60	55-150	186384	ComfortLine	–	DALI, PUSH	100,000	145
			110-150	186305	ComfortLine	–	–	100,000	150
	40	350/500/700	28-114*	186444	ComfortLine	Push-in terminal	–	100,000	148
	2x20	2x350	17-57	186407	ComfortLine	–	1-10 V	100,000	146
				186406	ComfortLine	–	–	100,000	149
	42	350-700	34-120*	186446, 186575, 186576	Primeline	Programmable	DALI, PUSH	100,000	142
			28-114*	186565	ComfortLine	Resistor	–	100,000	143
		350	80-120	186414	Easyline	–	–	50,000	154
	44/47/47	200/225/250	94-220*	186487	ComfortLine	Push-in terminal	–	100,000	147
	46.8	275/300/325	72-170*	186488	ComfortLine	Push-in terminal	–	100,000	147
	2x28.5/2x40	2x500/2x700	17-57	186410	ComfortLine	Dip switch	1-10 V	100,000	146
				186409	ComfortLine	Dip switch	–	100,000	149
	60	700	46-86	186429	Easyline	–	–	50,000	154
	77/84	350-700	60-220*	186445, 186577, 186578	Primeline	Programmable	DALI, PUSH	100,000	142
				186564	ComfortLine	Resistor	–	100,000	143
	79/85/85	350/500/700	60-225*	186443	ComfortLine	Push-in terminal	–	100,000	148
	82.5/84.8/85	375/400/425	100-220*	186491	ComfortLine	Push-in terminal	–	100,000	147
	84.7/84.6/85.1	550/600/650	65-154*	186492	ComfortLine	Push-in terminal	–	100,000	147
	107	500	90-215	186460	ComfortLine	–	DALI, PUSH	100,000	145
186315				ComfortLine	–	–	100,000	150	
2x70	2x700	42-100	186356	ComfortLine	–	DALI, PUSH	100,000	144	
			186355	ComfortLine	–	1-10 V	100,000	146	
			186354	ComfortLine	–	–	100,000	149	
Retail	10/14/20	250/350/500	17-40	186463	Easyline	Push-in terminal	–	50,000	163
	15/18/21	500/600/700	17-30	186464	Easyline	Push-in terminal	–	50,000	163
	24	350-700	14-34	186465, 186573, 186574	Primeline	Programmable	DALI, PUSH	100,000	155
				186280	ComfortLine	–	DALI, PUSH	100,000	156
				186279	ComfortLine	–	1-10 V	100,000	159
		186278	ComfortLine	–	–	100,000	160		
	28.5/34.2/40	500/600/700	25-57	186531	Easyline	Push-in terminal	–	50,000	162
	34	700	9-48	186177, 186195	ComfortLine	–	DALI, PUSH	100,000	157
	34.4/38.7/45	800/900/1050	25-43	186532	Easyline	Push-in terminal	–	50,000	162
	37	350-700	30-53	186503, 186571, 186572	Primeline	Programmable	DALI, PUSH	100,000	155
				186308	ComfortLine	–	DALI, PUSH	100,000	156
				186306	ComfortLine	–	–	100,000	160
				186556	ComfortLine	–	–	100,000	158
	40	700	20-57	186221, 186222	ComfortLine	–	DALI, PUSH	100,000	157
				186266, 186267	ComfortLine	–	–	100,000	161
	60	1050	20-57	186196, 186197	ComfortLine	–	DALI, PUSH	100,000	157
				186268, 186269	ComfortLine	–	–	100,000	161

LED Constant Current Drivers

Product overview by main application fields

Main application field	Capacity range W	Output current DC mA	Output voltage DC V	Ref. No.	Version	Current setting	Dimming	Max. service life time (hrs.)	Page	
Residential	5.6	700	2.8-8	186348	EasyLine	–	–	50,000	169	
	6	150	27-41	186447	EasyLine	–	C	50,000	168	
	7	350	8.4-20	186342	EasyLine	–	–	50,000	169	
	8	350	2-24	186180	ComfortLine	–	–	100,000	165	
	9	350	2-25	186519	ComfortLine	–	–	100,000	166	
	10	500	13-20	186448	EasyLine	–	C	50,000	168	
	11	350	2-32	186424	ComfortLine	–	–	100,000	165	
	12	250	27-48	186449	EasyLine	–	C	50,000	168	
		500	8-24	186508	EasyLine	–	–	50,000	170	
	12.6	350	8.4-36	186341	EasyLine	–	–	50,000	171	
	15	500	8-30	186349	EasyLine	–	–	50,000	171	
	16	500	2-32	186425	ComfortLine	–	–	100,000	165	
	17	700	2-25	186426	ComfortLine	–	–	100,000	165	
	18	350	32-52	186415	EasyLine	–	C	50,000	168	
		700	16-26	186450	EasyLine	–	C	50,000	168	
	20	350	16-57	186431	EasyLine	–	–	50,000	171	
			40-57	186507	EasyLine	–	–	50,000	170	
		1050	2-19	186427	ComfortLine	–	–	100,000	165	
	20.3	700	8-29	186350	EasyLine	–	–	50,000	171	
	25	700	22-36	186416	EasyLine	–	C	50,000	168	
	25.2	700	22-36	186353	EasyLine	–	–	50,000	171	
	30	350	57-86	186430	EasyLine	–	–	50,000	172	
		700	17-42	186393	ComfortLine	–	–	100,000	164	
	31.5	1050	20-30	186351	EasyLine	–	–	50,000	172	
	32	1050	20-31	186479	ComfortLine	–	–	100,000	167	
	36	700	32-52	186451	EasyLine	–	C	50,000	168	
		1050	18-36	186394, 186395	ComfortLine	–	C	100,000	164	
	40	350	78-114	186550	ComfortLine	–	–	100,000	181	
	60	700	43-86	186548	EasyLine	–	–	50,000	172	
		1050	40-58	186522	EasyLine	–	–	50,000	172	
	Street	40	350	78-114	186550	ComfortLine	–	–	100,000	181
			700	32-55	186490	ComfortLine	–	1-10 V	100,000	177
					186489	ComfortLine	–	–	100,000	179
39-57				186551	ComfortLine	–	–	100,000	181	
1050		26-38	186552	ComfortLine	–	–	100,000	181		
42		350	40-115	186175	ComfortLine	–	–	100,000	182	
60		1050	28-57	186316	ComfortLine	–	1-10 V	100,000	176	
75		350-1050	30-110*	186440	PrimeLine	Programmable	1-10 V	100,000	173	
		700	57-107	186400	ComfortLine	–	1-10 V	100,000	175	
		700/400	54-107	186397	ComfortLine	–	Power reduction	100,000	178	
82/90/90		700/1000/1400	22-117*	186367	PrimeLine	Dip switch/DALI	DALI,PUSH,MidNight	100,000	174	
100		700	70-143	186401	ComfortLine	–	1-10 V	100,000	175	
		700/400	70-143	186398	ComfortLine	–	Power reduction	100,000	178	
150		350-1050	85-260*	186442	PrimeLine	Programmable	1-10 V	100,000	173	
		700	107-210	186402	ComfortLine	–	1-10 V	100,000	175	
		700/400	107-210	186509	ComfortLine	–	Power reduction	100,000	178	
		700	107-210	186399	ComfortLine	–	–	100,000	180	
Industry	19.95/28.5/34.2/39.9	350/500/600/700	20-57	186326, 186327	ComfortLine	Rotary switch	1-10 V	100,000	185	
	38.7/45.1/51.6/60.2	900/1050/1200/1400	20-43	186208	ComfortLine	Rotary switch	1-10 V	100,000	184	
	50	700	35-72	186452	EasyLine	–	–	50,000	187	
	75	1050	35-72	186453	EasyLine	–	–	50,000	187	
	100	1400	30-72	186454	EasyLine	–	–	50,000	187	
	112	700	85-160	186299, 186300	ComfortLine	–	DALI, PUSH	100,000	183	
				186297, 186298	ComfortLine	–	–	100,000	186	
	125	1700	30-72	186455	EasyLine	–	–	50,000	187	
	126	1050	85-120	186303, 186304	ComfortLine	–	DALI, PUSH	100,000	183	
				186301, 186302	ComfortLine	–	–	100,000	186	
	150	2100	45-72	186456	EasyLine	–	–	50,000	187	
	175	2400	45-72	186510	EasyLine	–	–	50,000	187	
	200	2800	45-72	186477	EasyLine	–	–	50,000	187	
	230	3200	45-72	186478	EasyLine	–	–	50,000	187	
	Accessories									
iProgrammer	Ref. No. 186428	The iProgrammer is designed to configure LED drivers using the 3C function.							182	

* Depends on the adjusted current output

PrimeLine LED Drivers – Dimmable with Programmable Current

**350–700 mA,
max. 42 W and max. 84 W**

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.97

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Programmability

The output current can be freely adjusted in 1 mA steps between 350 mA and 700 mA (factory setting: see table).

An iProgrammer (Ref. No. 186428) and a PC running the respective VS software are required for programming purposes.



Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

DC operation: 198–264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2–1.5 mm²



Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I




See page 235–242

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	186446		186445	
all	60 °C	50 °C	70 °C	65 °C
hrs.	50,000	100,000	50,000	100,000

M10

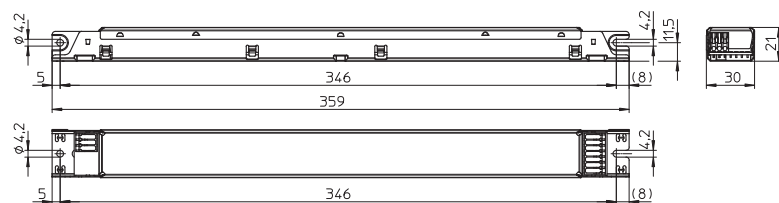

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC programmable mA	Factory setting mA	Voltage output* V DC	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M10 – Dimensions: 359x30x21 mm												
42	ECXd 700.150	186446	220–240	215–200	350–700 ^{-5/+10%}	350	34–120	< 250	> 88	–25 to 50	60	235
		186575				500						
		186576				700						
84	ECXd 700.149	186445	220–240	410–380	350–700 ^{-5/+7%}	350	60–220	< 250	> 88	–25 to 50	70	265
		186577				500						
		186578				700						

* Depends on the adjusted current output

ComfortLine LED Drivers – Dimmable with Selectable Current

**350–700 mA,
max. 42 W and max. 84 W**

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.97

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Adjustable

The output current can be freely adjusted in 25 mA steps between 350 mA and 700 mA by using a resistor (according to LEDset standard).

Resistors on request.



Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

DC operation: 198–264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2–1.5 mm²



Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I




See page 235–242

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	186565		186564	
all	60 °C	50 °C	70 °C	60 °C
hrs.	50,000	100,000	50,000	100,000

M10

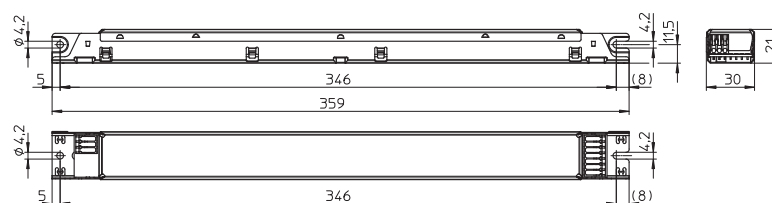

Products under development; preliminary technical datas

Max. output	Type	Ref. No.	Mains voltage 50–60 Hz	Mains current	Current output DC programmable	Voltage output* DC	Max. voltage without load DC	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
-------------	------	----------	------------------------	---------------	--------------------------------	--------------------	------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

M10 – Dimensions: 359x30x21 mm

42	ECXd 700.214	186565	220–240	200–110	350–700 ±5%	28–114	< 250	> 88	-25 to 50	60	227
77	ECXd 700.213	186564	220–240	420–390	350–700 ±5%	60–220	< 250	> 88	-25 to 50	70	250
84											

* Depends on the adjusted current output

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

ComfortLine LED Drivers – Dimmable

2x700 mA / max. 2x70 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.95

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.		
2x700 mA	186356	85 °C	75 °C
hrs.		50,000	100,000



See page 235-242

M12

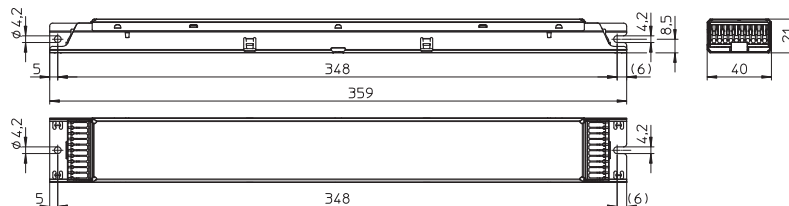

Max. output W	Type	Ref. No.	Mains voltage V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	-----------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

M12 – Dimensions: 359x40x21 mm

2x70	ECXd 2700.089	186356	198-264 220-240	834-625 750-688	2x700 ±5%	42-100	< 120	> 90	-20 to 50	85	400
------	---------------	---------------	--------------------	--------------------	-----------	--------	-------	------	-----------	----	-----

ComfortLine LED Drivers – Dimmable

4 x 60 mA / max. 4 x 9 W
500 mA / max. 107 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
	70 °C	60 °C
hrs.	50,000	100,000



See page 235-242

M10

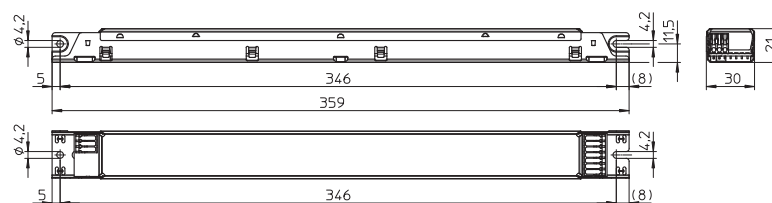

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M10 – Dimensions: 359 x 30 x 21 mm											
4x9	ECXd 460.110	186384	198-264	190-140	4x60 ±5%	55-150	< 450	> 91	-25 to 65	70	230
			220-240	170-150							
107	ECXd 500.163	186460	198-264	557-412	500 +5/-10%	90-215	< 450	> 90	-20 to 50	70	220
			220-240	502-460							

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

ComfortLine LED Drivers – Dimmable

2x350 mA / max. 2x20 W
2x500 mA / max. 2x28.5 W
2x700 mA / max. 2x40 W
and max. 2x70 W

The linear LED constant-current drivers are designed for use in office and retail lighting.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.95

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current (M12) or with an analogue dimming signal (M10/M11).

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV


Expected service life time

at operation temperatures at t_c point




Operation current	Ref. No.					
	186407		186410		186355	
2x350 mA	75 °C	65 °C	–	–	–	–
2x500 mA	–	–	75 °C	65 °C	–	–
2x700 mA	–	–	75 °C	65 °C	85 °C	75 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000


M10.1

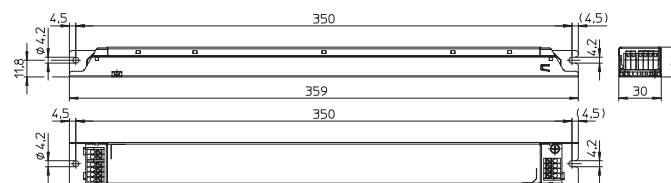

M11.1

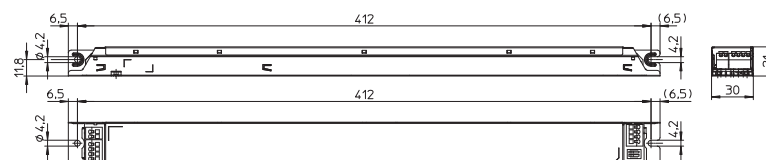

M12

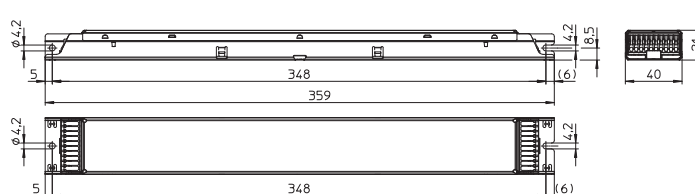

Max. output W	Type	Ref. No.	Mains voltage V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M10.1 – Dimensions: 359x30x21 mm											
2x20	ECXd 2350.124	186407	198-264	500-340	2x350 ±5%	17-57	42	> 85	-20 to 50	75	270
			220-240	400-370							
M11.1 – Dimensions: 425x30x21 mm											
2x28.5/ 2x40	ECXd 2700.127	186410	198-264	490-385	2x500 ±5%/ 2x700 ±5%	17-57	60	> 88	-20 to 50	75	310
			220-240	480-400							
M12 – Dimensions: 359x40x21 mm											
2x70	ECXd 2700.088	186355	198-264	834-625	2x700 ±5%	42-100	120	> 90	-20 to 50	85	400
			220-240	750-688							

ComfortLine LED Drivers – with Selectable Current

125 to 650 mA / 27.5 W to 85.1 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.97

Selectable current output

The required current output can be chosen by selecting the respective pin at the output terminal.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.					
	186486		186487, 186488, 186491		186492	
125-175 mA	55 °C	45 °C	–	–	–	–
200-425 mA	–	–	60 °C	50 °C	–	–
550 mA	–	–	–	–	65 °C	55 °C
600-650 mA	–	–	–	–	70 °C	60 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000

M10

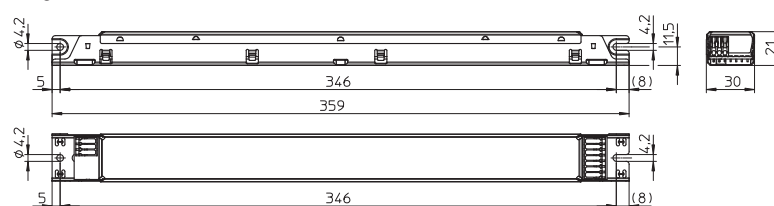

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g	
M10 – Dimensions: 359x30x21 mm												
27.5	ECXe 175.173	186486	220-240	150-140	125	155-220	< 250	> 90	-25 to 50	55	220	
33				175-165	150	130-220		> 91				
38.5				200-190	175	110-220		> 92				
44	ECXe 250.174	186487	220-240	220-205	200	112-220	< 250	> 93	-25 to 50	60	220	
47				230-220	225	104-208		> 92				
47				235-220	250	94-188		> 92				
46.8	ECXe 325.175	186488	220-240	235-220	275	85-170	< 250	> 91	-25 to 50	60	220	
				235-220	300	78-156		> 91				
				235-220	325	72-144		> 91				
82.5	ECXe 425.178	186491	220-240	410-375	375	113-220	< 250	> 93	-25 to 50	60	243	
84.8				420-385	400	105-212		> 94				
85				420-390	425	100-200		> 94				
84.7	ECXe 650.179	186492	220-240	420-390	550	77-154	< 250	> 93	-25 to 50	65	244	
84.6				420-390	600	71-141		> 93				70
85.1				420-390	650	65-131		> 93				70

ComfortLine LED Drivers – with Selectable Current

**350/500/700 mA,
max. 40 W and max. 85 W**

The linear LED constant-current drivers are designed for use in office and retail lighting.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.97

Selectable current output

The required current output can be chosen by selecting the respective pin at the output terminal.

Connection details

Mains voltage: 220-240 V \pm 10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overtemperature protection

Protection against "no load" operation

Degree of protection: IP20


Protection class I

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186444		Ref. No. 186443	
	350 mA	60 °C	50 °C	70 °C
500 mA	65 °C	55 °C	75 °C	65 °C
700 mA	70 °C	60 °C	80 °C	70 °C
hrs.	50,000	100,000	50,000	100,000

M10

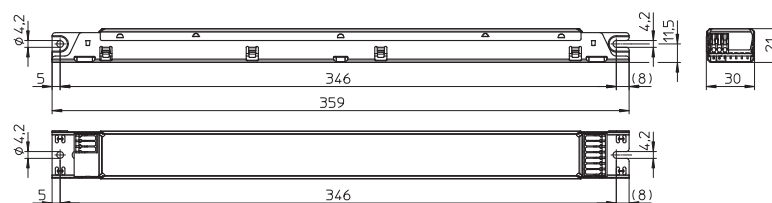

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M10 – Dimensions: 359x30x21 mm											
40	ECXe 700.148	186444	220-240	400-370	350 \pm 5%	57-114	< 250	> 90	-25 to 50	60	227
				420-390	500 \pm 5%	40-80		> 89		65	
				420-390	700 \pm 5%	28-57		> 88		70	
79	ECXe 700.147	186443	220-240	200-190	350 \pm 5%	120-225	< 250	> 94	-25 to 50	70	250
				205-190	500 \pm 5%	80-170		> 93		75	
				210-195	700 \pm 5%	60-120		> 92		80	

ComfortLine LED Drivers

2x350 mA / max. 2x20 W
2x500 mA / max. 2x28.5 W
2x700 mA / max. 2x40 W
and max. 2x70 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.95

Connection details

Mains voltage: 220-240 V $\pm 10\%$

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. 186406		186409		186354	
	75 °C	65 °C	—	—	—	—
2x350 mA	—	—	75 °C	65 °C	—	—
2x500 mA	—	—	75 °C	65 °C	85 °C	75 °C
2x700 mA	—	—	75 °C	65 °C	85 °C	75 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000


M10.1

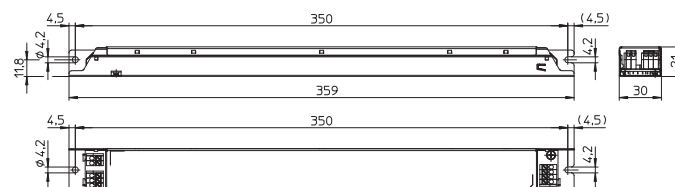

M11.1

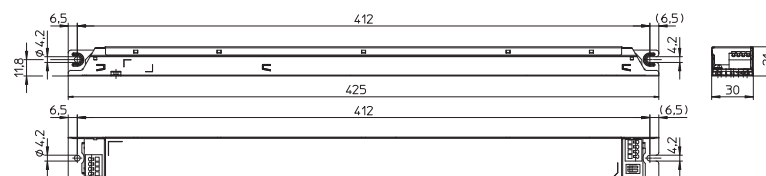

M12

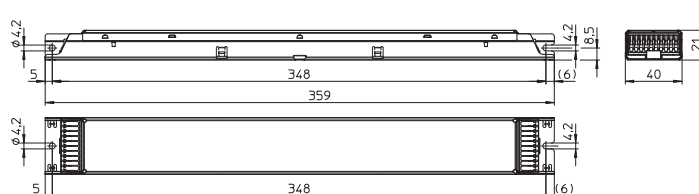

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M10.1 – Dimensions: 359x30x21 mm											
2x20	ECXe 2350.123	186406	198-264	500-340	2x350 $\pm 5\%$	17-57	< 60	> 85	-20 to 50	75	270
			220-240	400-370							
M11.1 – Dimensions: 425x30x21 mm											
2x28.5/ 2x40	ECXe 2700.126	186409	198-264	260-175	2x500 $\pm 5\%$ /	17-57	< 60	> 88	-20 to 50	75	310
			220-240	200-190	2x700 $\pm 5\%$						
M12 – Dimensions: 359x40x21 mm											
2x70	ECXe 2700.087	186354	198-264	834-625	2x700 $\pm 5\%$	42-100	< 120	> 90	-20 to 50	85	400
			220-240	750-688							

ComfortLine LED Drivers

4x60 mA / max. 4x9 W
500 mA / max. 107 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation (except 186305):

198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.	
	all types	
	70 °C	60 °C
hrs.	50,000	100,000

M6.1

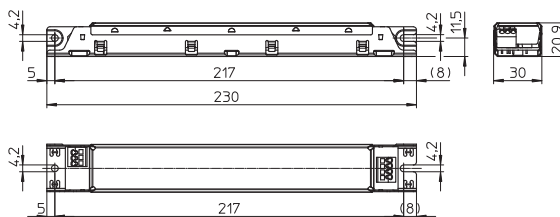

M10

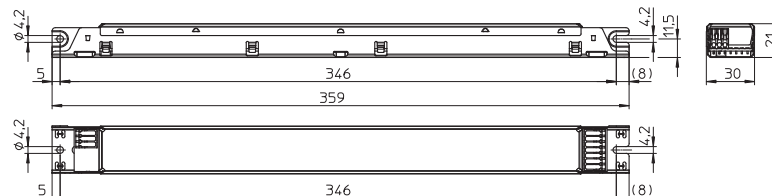

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M6.1 - Dimensions: 230x30x20.9 mm											
4x9	ECXe 460.061	186305	- 220-240	- 180-165	4x60 ±5%	110-150	450	> 88	-20 to 60	70	156
M10 - Dimensions: 359x30x21 mm											
107	ECXe 500.068	186315	198-264 220-240	650-410 520-440	500 ±5%	90-215	450	> 94	-25 to 50	70	273

ComfortLine LED Drivers

350 mA / max. 15 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.6

Connection details

Mains voltage: 220-240 V $\pm 10\%$

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
350 mA	80 °C	70 °C
hrs.	50,000	100,000

K21

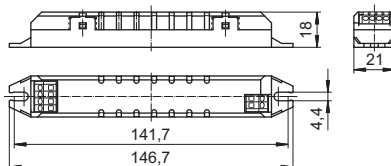

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
------------------	------	----------	---	---------------------	----------------------------	---------------------------	--------------------------------------	--------------------------------------	------------------------------------	-----------------------------------	-------------

K21 - Dimensions: 146.7 x 21 x 18 mm

15	ECXe 350.031	186229	176-264 220-240	140-90 81-75	350 ^{+5/-10%}	2-40	42	> 81	-20 to 50	80	49
----	--------------	---------------	--------------------	-----------------	------------------------	------	----	------	-----------	----	----

1

2

3

4

5

6

7

8

9

10

11

12

ComfortLine LED Drivers

500 mA / max. 28.5 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Connection details

Mains voltage: 120-240 V \pm 10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
	186554	
500 mA	65 °C	55 °C
hrs.	50,000	100,000

M6.1

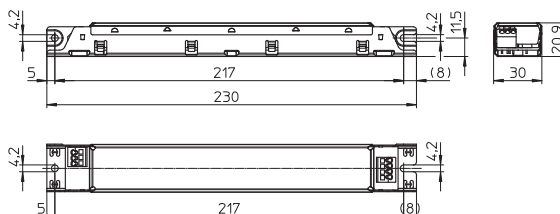

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M6.1 - Dimensions: 230 x 30 x 20.9 mm											
28.5	ECXe 500.210	186554	120-240	286-143	500	19-57	< 250	> 83	-25 to 50	65	160

EasyLine LED Drivers – with Selectable Current

150/250/350 mA / max. 14 W
500/600/700 mA / max. 21 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Selectable current output

The required current output can be chosen by selecting the respective pin at the output terminal.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186530		186529	
	65 °C	55 °C	70 °C	60 °C
150-350 mA	65 °C	55 °C	–	–
500-700 mA	–	–	70 °C	60 °C
hrs.	30,000	50,000	30,000	50,000

M6.1

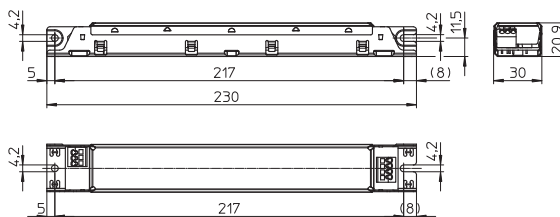

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M6.1 – Dimensions: 230 x 30 x 20.9 mm											
6	ECXe 350.158	186530	220-240	32-29	150 ±5%	17-40	< 60	> 85	-25 to 50	65	160
10				53-49	250 ±5%						
14				74-68	350 ±5%						
15	ECXe 700.197	186529	220-240	80-73	500 ±5%	17-30	< 60	> 85	-25 to 50	70	160
18				96-88	600 ±5%						
21				112-102	700 ±5%						

EasyLine LED Drivers

350 mA / max. 42 W

700 mA / max. 60 W

The linear LED constant-current drivers are designed for use in office and retail lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV (186429)




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	186414		186429	
350 mA	70 °C	60 °C	-	-
700 mA	-	-	75 °C	65 °C
hrs.	30,000	50,000	30,000	50,000

M7.1

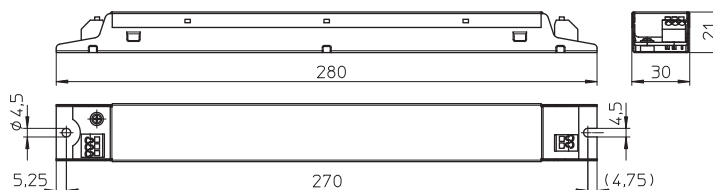

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M7.1 - Dimensions: 280x30x21 mm											
42	ECXe 350.129	186414	220-240	220-200	350 ±5%	80-120	< 130	> 88	-15 to 45	70	200
60	ECXe 700.140	186429	220-240	305-275	700 ±5%	46-86	< 95	> 89	-15 to 45	75	200

PrimeLine LED Drivers – with Programmable Current

350–700 mA / max. 24 W and max. 37 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.

Electrical characteristics

Secondary side switching of LED modules is allowed (hot wiring).
Power factor at full load: > 0.9
Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.
Dimming range: 1 to 100%
If no dimming interface is connected, brightness will stay at 100%.

Programmability

The output current can be freely adjusted in 1 mA steps between 350 mA and 700 mA (factory setting: see table).
An iProgrammer (Ref. No. 186428) and a PC running the respective VS software are required for programming purposes.



Connection details

Mains voltage: 220–240 V ±10%
Mains frequency: 50–60 Hz
DC operation: 198–264 V DC, 0 Hz
(can be reduced to 176 V with reduced service life time)
With integrated through-wiring
Push-in terminals: 0.2–1.5 mm²



Safety features

Electronic short-circuit protection
Overload and overtemperature protection
Protection against "no load" operation
Degree of protection: IP20

Protection class II SELV

Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.	
	all types	
all	75 °C	65 °C
hrs.	50,000	100,000




See page 235–242

K2.1



K3.2

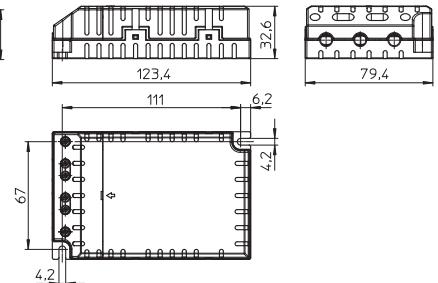

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC programmable mA	Factory setting mA	Voltage output* DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K2.1 – Dimensions: 103,6 x 67,4 x 31 mm												
24	ECXd 700.166	186465	198–264	160–100	350–700 ±5%	350	14–34	< 45	> 84	–25 to 50	75	145
		186573	220–240	130–120		500						
		186574				700						
K3.2 – Abmessungen: 123,4 x 79,4 x 32,6 mm												
37	ECXd 700.184	186503	198–264	235–155	350–700 ±5%	350	30–53	< 60	> 87	–25 to 50	75	190
		186571	220–240	200–180		500						
		186572				700						



ComfortLine LED Drivers – Dimmable

700 mA / max. 24 W and max. 37 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.

Electrical characteristics

Secondary side switching of LED modules is allowed (hot wiring).

Power factor at full load: > 0.9

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 1 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

With integrated through-wiring

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
all	75 °C	65 °C
hrs.	50,000	100,000




See page 235-242

K2.1



K3.2

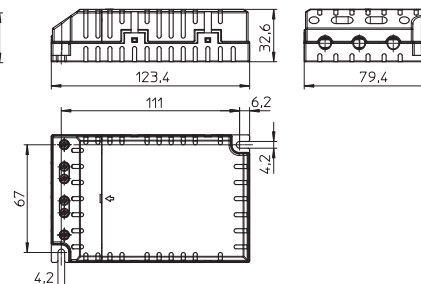

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K2.1 – Dimensions: 103.6 x 67.4 x 31 mm											
24	ECXd 700.044	186280	198-264	160-100	700 ±5%	14-34	< 45	> 84	-25 to 50	75	145
			220-240	130-120							
K3.2 – Dimensions: 123.4 x 79.4 x 32.6 mm											
37	ECXd 700.064	186308	198-264	235-155	700 ±5%	30-53	< 60	> 87	-25 to 50	75	190
			220-240	200-180							

ComfortLine LED Drivers – Dimmable

**700 mA / max. 34 W and max. 40 W,
1050 mA / max. 60 W**

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.97

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 0.5 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV equivalent



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
700 mA	75 °C	65 °C
1050 mA	80 °C	70 °C
hrs.	50,000	100,000




See page 235-242

K3

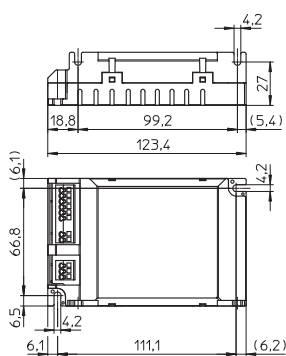

K3 with cord grip

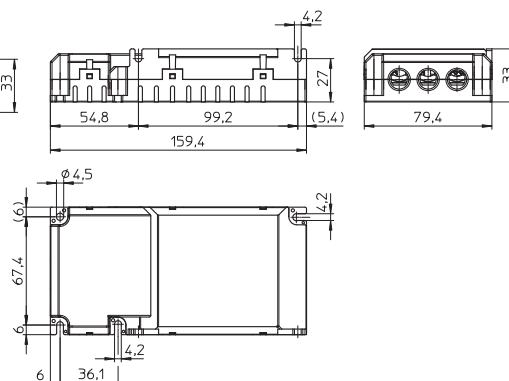

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	12 V interface max. 2 W	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	-------------------------	------------------------------	-----------------------------	----------

K3 – Dimensions: 123.4x79.4x33 mm

34	ECXd 700.017	186177	176-264	230-160	700 ±5%	9-48	52	> 85	no	-20 to 50	75	180
			220-240	190-170								
40	ECXd 700.026	186221	176-264	280-185	700 ±5%	20-57	60	> 85	yes	-20 to 50	75	186
			220-240	230-200								
60	ECXd 1050.020	186196	176-264	380-252	1050 ±5%	20-57	60	> 85	yes	-20 to 50	80	220
			220-240	305-275								

K3 with cord grip – Dimensions: 159.4x79.4x33 mm

34	ECXd 700.017	186195	176-264	230-160	700 ±5%	9-48	52	> 85	no	-20 to 50	75	215
			220-240	190-170								
40	ECXd 700.026	186222	176-264	280-185	700 ±5%	20-57	60	> 85	yes	-20 to 50	75	223
			220-240	230-200								
60	ECXd 1050.020	186197	176-264	380-252	1050 ±5%	20-57	60	> 85	yes	-20 to 50	80	250
			220-240	305-275								

ComfortLine LED Drivers

700 mA / max. 37 W

Electrical characteristics

Secondary side switching of LED modules is allowed. (hot wiring)

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

With integrated through-wiring

Push-in terminals: 0.2-2.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186556	
700 mA	75 °C	65 °C
hrs.	50,000	100,000

K3 with cord grip

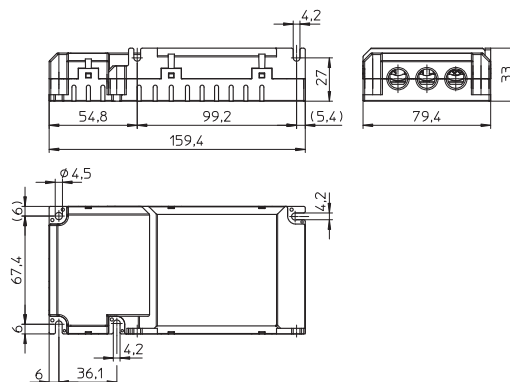

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	---	---------------------	----------------------------	---------------------------	--------------------------------------	--------------------------------------	------------------------------------	-----------------------------------	-------------

K3 with cord grip – Dimensions: 159.4x79.4x33 mm

37	ECXe 700.211	186556	198-264 220-240	235-155 200-180	700 ±5%	30-53	< 60	> 87	-25 to 50	75	170
----	--------------	---------------	--------------------	--------------------	---------	-------	------	------	-----------	----	-----

ComfortLine LED Drivers – Dimmable

700 mA / max. 24 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.

Electrical characteristics

Secondary side switching of LED modules is allowed (hot wiring).

Power factor at full load: > 0.9

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 1 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

With integrated through-wiring

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186279	
700 mA	75 °C	65 °C
hrs.	50,000	100,000

1-10V

K2.1

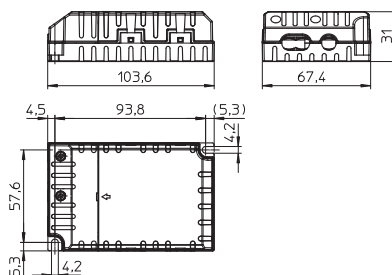

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K2.1 – Dimensions: 103.6x67.4x31 mm

24	ECXd 700.043	186279	198-264 220-240	160-100 130-120	700 ±5%	14-34	< 45	> 84	-25 to 50	75	145
----	--------------	---------------	--------------------	--------------------	---------	-------	------	------	-----------	----	-----

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

ComfortLine LED Drivers

700 mA / max. 24 W and max. 37 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.

Electrical characteristics

Secondary side switching of LED modules is allowed (hot wiring).

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

With integrated through-wiring

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
700 mA	75 °C	65 °C
hrs.	50,000	100,000

K2.1



K3.2

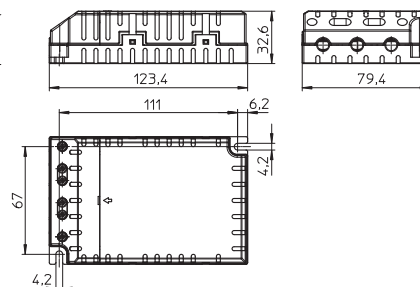

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K2.1 - Dimensions: 103.6 x 67.4 x 31 mm											
24	ECXe 700.042	186278	198-264	160-100	700 ±5%	14-34	< 45	> 84	-25 to 50	75	135
			220-240	130-120							
K3.2 - Dimensions: 123.4 x 79.4 x 32.6 mm											
37	ECXe 700.062	186306	198-264	235-155	700 ±5%	30-53	< 60	> 87	-25 to 50	75	170
			220-240	200-180							

ComfortLine LED Drivers

700 mA / max. 40 W
1050 mA / max. 60 W
With 12 V interface

Electrical characteristics

Secondary side switching of LED modules is not allowed.
Power factor at full load: 0.98

Connection details

Mains voltage: 220-240 V ±10%
Mains frequency: 50-60 Hz
DC operation: 176-264 V DC, 0 Hz
Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection
Overload and overtemperature protection
Protection against "no load" operation
Degree of protection: IP20
Protection class I


SELV equivalent



Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	186266, 186267		186268, 186269	
700 mA	75 °C	65 °C	-	-
1050 mA	-	-	80 °C	70 °C
hrs.	50,000	100,000	50,000	100,000

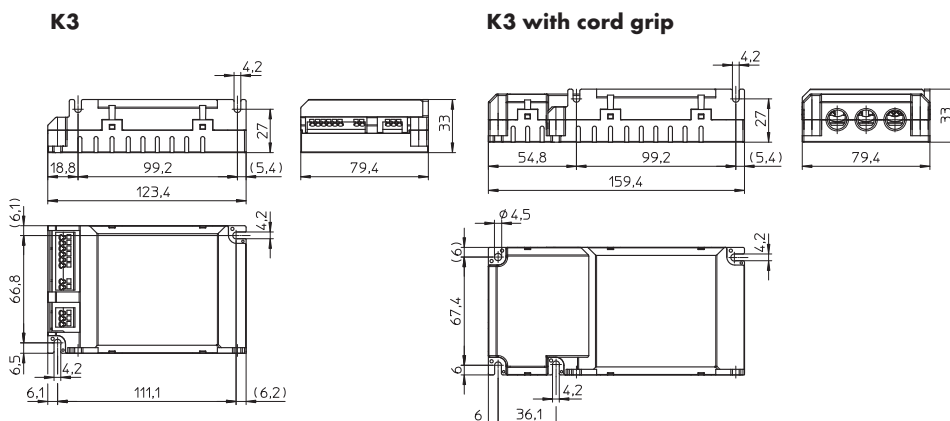

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	12 V interface max. 2 W	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
------------------	------	----------	---	---------------------	----------------------------	---------------------------	--------------------------------------	--------------------------------------	----------------------------	------------------------------------	-----------------------------------	-------------

K3 - Dimensions: 123.4 x 79.4 x 33 mm

40	ECXe 700.034	186266	176-264 220-240	280-185 230-200	700 ±5%	20-57	60	> 85	yes	-20 to 50	75	182
60	ECXe 1050.035	186268	176-264 220-240	380-252 305-275	1050 ±5%	20-57	60	> 85	yes	-20 to 50	80	213

K3 with cord grip - Dimensions: 159.4 x 79.4 x 33 mm

40	ECXe 700.034	186267	176-264 220-240	280-185 230-200	700 ±5%	20-57	60	> 85	yes	-20 to 50	75	220
60	ECXe 1050.035	186269	176-264 220-240	380-252 305-275	1050 ±5%	20-57	60	> 85	yes	-20 to 50	80	248

EasyLine LED Drivers – with Selectable Current

500/600/700 mA / max. 40 W
800/900/1050 mA / max. 45 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186531		186532	
	500-600 mA	75 °C	65 °C	–
700 mA	80 °C	70 °C	–	–
800-900 mA	–	–	75 °C	65 °C
1050 mA	–	–	80 °C	70 °C
hrs.	30,000	50,000	30,000	50,000

Selectable current output

The required current output can be chosen by selecting the respective pin at the output terminal.

Safety features

Temporary electronic short-circuit protection

Overload and overtemperature protection


Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV

K2.1

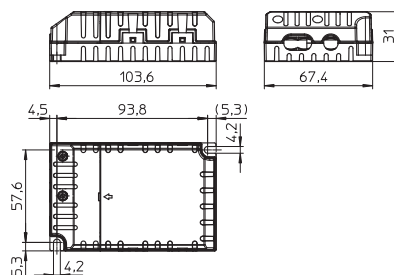

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K2.1 – Dimensions: 103.6 x 67.4 x 31 mm

28.5	ECXe 700.199	186531	220-240	147-134	500 ±7.5%	25-57	< 60	> 88	-20 to 50	75	160
34.2				176-161	600 ±7.5%					75	
40				206-189	700 ±7.5%					80	
34.4	ECXe 1050.200	186532*	220-240	177-162	800 ±7.5%	25-43	< 60	> 88	-20 to 50	75	160
38.7				199-189	900 ±7.5%					75	
45				240-220	1050 ±7.5%					80	

*Products under development; preliminary technical datas

EasyLine LED Drivers – with Selectable Current

250/350/500 mA / max. 20 W
500/600/700 mA / max. 21 W

Compact casing shape with integrated cord grip optional for built-in or independent operation.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Selectable current output

The required current output can be chosen by selecting the respective pin at the output terminal.

Safety features

Temporary electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II


SELV

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. all types	
	all	80 °C
hrs.	30,000	50,000


K2.1

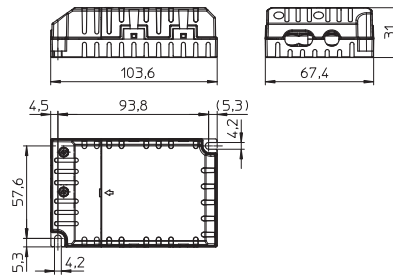

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------	------------------	----------------------	---------------------	-----------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K2.1 – Dimensions: 103.6 x 67.4 x 31 mm

10	ECXe 500.164	186463	220-240	53-48	250 ±7.5%	17-40	< 60	> 85	-20 to 50	80	145
14				73-67	350 ±7.5%						
20				104-95	500 ±7.5%						
15	ECXe 700.165	186464	220-240	80-71	500 ±7.5%	17-30	< 60	> 85	-20 to 40	80	145
18				94-86	600 ±7.5%						
21				110-100	700 ±7.5%						



ComfortLine LED Drivers – Dimmable

700 mA / max. 30 W
1050 mA / max. 36 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Dimming (except 186393)

Dimmable with phase-cutting trailing-edge dimmer

Minimum dimmer load has to be observed.

The compatibility of the driver and the dimmer has to be confirmed prior to installation to avoid flickering and/or noises.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point


Operation current	Ref. No. 186393		186394, 186395	
	75 °C	65 °C	–	–
700 mA	75 °C	65 °C	–	–
1050 mA	–	–	75 °C	65 °C
hrs.	50,000	100,000	50,000	100,000



K35



K35 with cord grip

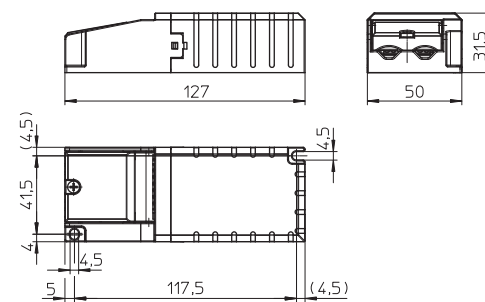

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K35 – Dimensions: 96x50x31.5 mm

30	ECXe 700.112	186393	220-240	155-140	700 ±5%	17-42	< 60	> 88	-25 to 50	75	130
----	--------------	---------------	---------	---------	---------	-------	------	------	-----------	----	-----

K35 – Dimmable – Dimensions: 96x50x31.5 mm

36	ECXd 1050.113	186394	220-240	200-180	1050 ±10%	18-36	< 60	> 85	-10 to 40	75	140
----	---------------	---------------	---------	---------	-----------	-------	------	------	-----------	----	-----

K35 with cord grip – Dimmable – Dimensions: 127x50x31.5 mm

36	ECXd 1050.113	186395	220-240	200-180	1050 ±10%	18-36	< 60	> 85	-10 to 40	75	155
----	---------------	---------------	---------	---------	-----------	-------	------	------	-----------	----	-----

ComfortLine LED Drivers

350 mA / max. 8 W and max. 11 W
500 mA / max. 16 W
700 mA / max. 17 W
1050 mA / max. 20 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.55 (186180: > 0.6)

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Screw terminals: 2.5 mm²

With integrated cord grip (except 186180)

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV equivalent




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.									
	186180		186424		186425		186426		186427	
350 mA	80 °C	70 °C	70 °C	60 °C	-	-	-	-	-	-
500 mA	-	-	-	-	75 °C	65 °C	-	-	-	-
700 mA	-	-	-	-	-	-	75 °C	65 °C	-	-
1050 mA	-	-	-	-	-	-	-	-	75 °C	65 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000	50,000	100,000	50,000	100,000

K29



K39

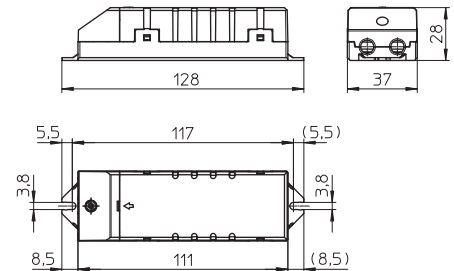

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K29 - Dimensions: 65 x 30.7 x 21.5 mm

8	ECXe 350.018	186180	176-264 220-240	60-40 91-88	350 ±5%	2-24	25	> 78	-20 to 50	80	33
---	--------------	---------------	--------------------	----------------	---------	------	----	------	-----------	----	----

K39 - Dimensions: 128 x 37 x 28 mm

11	ECXe 350.009	186424	176-264 220-240	75-51 122-117	350 ±5%	2-32	34	> 87	-20 to 50	70	71
16	ECXe 500.010	186425	176-264 220-240	106-72 160-155	500 ±5%	2-32	34	> 88	-20 to 50	75	71
17	ECXe 700.011	186426	176-264 220-240	117-79 188-178	700 ±5%	2-25	27	> 87	-20 to 50	75	71
20	ECXe 1050.012	186427	176-264 220-240	137-92 210-202	1050 ±5%	2-19	21	> 87	-20 to 45	75	71

ComfortLine LED Drivers

350 mA / max. 9 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.6

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Screw terminals: 2.5 mm²

Safety features

Protection against transient main peaks up to 1 kV (between L and N)

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV equivalent



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. 186519	
350 mA	80 °C	70 °C
hrs.	50,000	100,000

Special Feature

Protection against transient main peaks up to 1 kV (between L and N)

K29



Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K29 – Dimensions: 65 x 30.7 x 21.5 mm											
9	ECXe 350.192	186519	176-264 220-240	65-43 52-48	350 ±5%	3-25	25	> 78	-20 to 50	80	35

ComfortLine LED Drivers

1050 mA / max. 32 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads

primary: 2x0.5 mm², length: approx. 201 mm

secondary: 2x0.5 mm², length: approx. 116 mm

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186479	
1050 mA	75 °C	65 °C
hrs.	50,000	100,000

K35 with leads

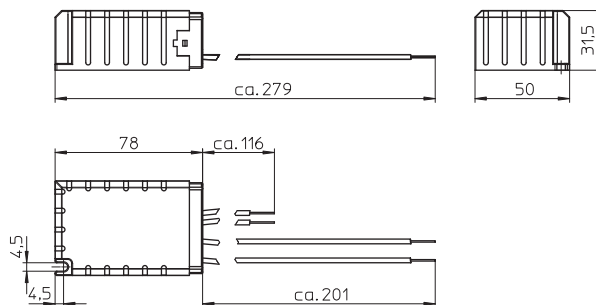

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
------------------	------	----------	--------------------------------	---------------------	----------------------------	---------------------------	---	--	---------------------------------------	--------------------------------------	-------------

K35 with leads – Dimensions: 78x50x31.5 mm

32	ECXe 1050.117	186479	220-240	165-140	1050 ±10%	20-31	< 60	> 85	-25 to 50	75	170
----	---------------	---------------	---------	---------	-----------	-------	------	------	-----------	----	-----

EasyLine LED Drivers – Dimmable

150–700 mA / max. 6–36 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.85

Dimming

Dimmable with phase-cutting trailing-edge dimmer.

Minimum dimmer load has to be observed.

The compatibility of the driver and the dimmer has to be confirmed prior to installation to avoid flickering and/or noises.

Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

Screw terminals: 0.5–2.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point


Operation current	Ref. No.			
	186415, 186416, 186451	186447, 186448, 186449, 186450		
all	80 °C	70 °C	70 °C	60 °C
hrs.	30,000	50,000	30,000	50,000



K52

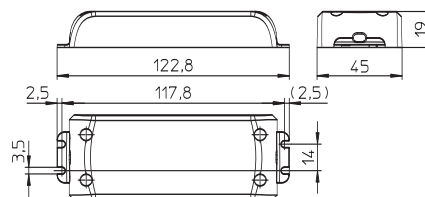

K53

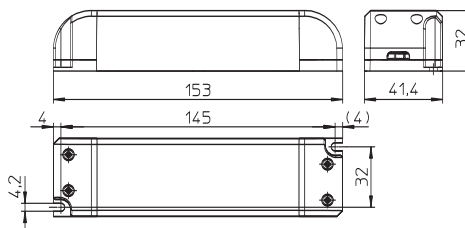

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K52 – Dimensions: 122.8x45x19 mm

6	ECXd 150.151	186447	220–240	40–35	150 ±8%	27–41	60	> 78	-15 to 45	70	70
10	ECXd 500.152	186448	220–240	60–50	500 ±8%	13–20	30	> 80	-15 to 45	70	70
12	ECXd 250.153	186449	220–240	70–60	250 ±8%	27–48	60	> 80	-15 to 45	70	70

K53 – Dimensions: 153x41.4x32 mm

18	ECXd 350.130	186415	220–240	100–90	350 ±8%	32–52	60	> 85	-15 to 45	80	70
18	ECXd 700.134	186450	220–240	95–85	700 ±8%	16–26	35	> 85	-15 to 45	70	140
25	ECXd 700.131	186416	220–240	140–120	700 ±8%	22–36	60	> 85	-15 to 45	80	140
36	ECXd 700.155	186451	220–240	190–170	700 ±8%	32–52	60	> 83	-15 to 45	80	170

EasyLine LED Drivers

350 mA / max. 7 W
700 mA / max. 5.6 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.5

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads

primary: 2x0.75 mm², length: 180 mm

secondary: 2x0.5-0.75 mm², length: 180 mm

Safety features

Electronic short-circuit protection


Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV

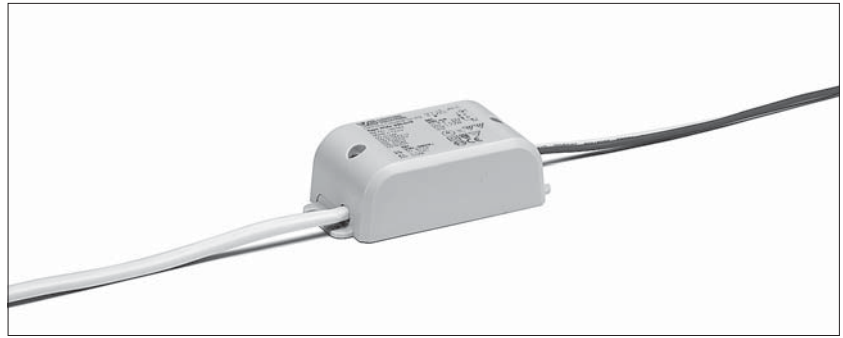


Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. all types	
	75 °C	65 °C
hrs.	30,000	50,000

K51

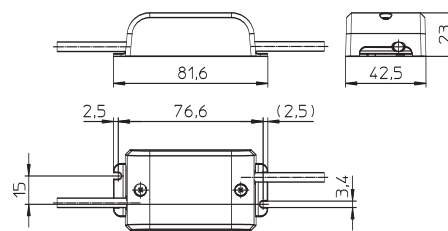

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
------------------	------	----------	--------------------------------	---------------------	----------------------------	---------------------------	--------------------------------------	--------------------------------------	------------------------------------	-----------------------------------	-------------

K51 – Dimensions: 81.6x42.5x23 mm

5.6	ECXe 700.081	186348	220-240	45-30	700 ±5%	2.8-8	< 60	> 70	- 15 to 45	75	45
7	ECXe 350.079	186342	220-240	50-36	350 ±5%	8.4-20	< 60	> 70	- 15 to 45	75	45



EasyLine LED Drivers

350 mA / max. 20 W

500 mA / max. 12 W

The LED constant-current drivers are designed for use in residential lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

Screw terminals: 0.5–2.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186508		Ref. No. 186507	
	70 °C	60 °C	75 °C	65 °C
350 mA	–	–	–	–
500 mA	–	–	–	–
hrs.	30,000	50,000	30,000	50,000

K52

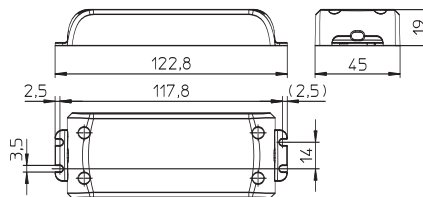

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K52 – Dimensions: 122.8x45x19 mm											
12	ECXe 500.189	186508	220–240	64–58	500 ±5%	8–24	< 60	> 85	- 15 to 45	70	65
20	ECXe 350.188	186507	220–240	107–98	350 ±5%	40–57	< 60	> 85	- 15 to 45	75	70

EasyLine LED Drivers

350 mA / max. 12.6 W and 20 W

500 mA / max. 15 W

700 mA / max. 20.3 W and 25.2 W

The LED constant-current drivers are designed for use in residential lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.5 or > 0.95 (186353)

Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

Screw terminals: 0.5–2.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.									
	186341		186349		186431		186350		186353	
350 mA	75 °C	65 °C	–	–	70 °C	60 °C	–	–	–	–
500 mA	–	–	75 °C	65 °C	–	–	–	–	–	–
700 mA	–	–	–	–	–	–	75 °C	65 °C	70 °C	60 °C
hrs.	30,000	50,000	30,000	50,000	30,000	50,000	30,000	50,000	30,000	50,000

K52

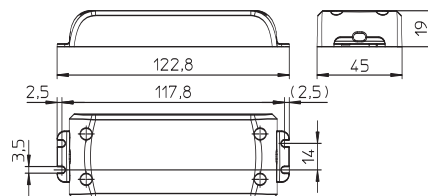

K54

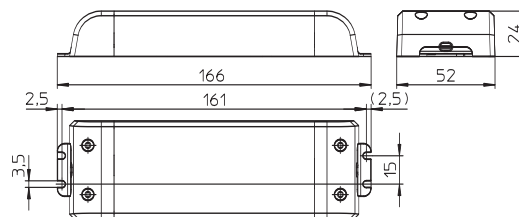

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K52 – Dimensions: 122.8x45x19 mm											
12.6	ECXe 350.078	186341	220–240	100–70	350 ±5%	8.4–36	< 60	> 83	-15 to 45	75	65
15	ECXe 500.082	186349	220–240	90–70	500 ±5%	8–30	< 60	> 83	-15 to 45	75	70
20	ECXe 350.142	186431	220–240	110–95	350 ±5%	16–57	< 60	> 85	-15 to 45	70	140
20.3	ECXe 700.083	186350	220–240	115–100	700 ±5%	8–29	< 60	> 83	-15 to 45	75	70
K54 – Dimensions: 166x52x24 mm											
25.2	ECXe 700.086	186353	220–240	130–115	700 ±8%	22–36	< 60	> 88	-15 to 45	70	140

EasyLine LED Drivers

350–1050 mA / max. 30–60 W

The LED constant-current drivers are designed for use in residential lighting.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

Screw terminals: 0.5–2.5 mm²

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.					
	186430		186351, 186522		186548	
350 mA	70 °C	60 °C	–	–	–	–
750 mA	–	–	–	–	75 °C	65 °C
1050 mA	–	–	75 °C	65 °C	–	–
hrs.	30,000	50,000	30,000	50,000	30,000	50,000

K53

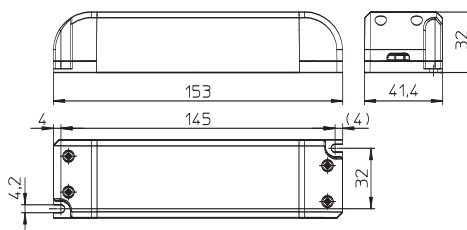

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	--------------------------	------------------	----------------------	---------------------	--------------------------------	-----------------------------------	------------------------------	-----------------------------	----------

K53 – Dimensions: 153x41.4x32 mm

30	ECXe 350.141	186430	220–240	160–140	350 ±6%	57–86	< 90	> 89	–15 to 45	70	200
31.5	ECXe 1050.084	186351	220–240	150–145	1050 ±6%	20–30	< 60	> 88	–15 to 45	75	140
60	ECXe 700.206	186548*	220–240	320–294	700 ±8%	43–86	< 120	> 85	–15 to 45	75	180
60	ECXe 1050.183	186522*	220–240	320–294	1050 ±8%	40–58	< 70	> 85	–15 to 45	75	180

* Products under development; preliminary technical datas

PrimeLine LED Drivers – Dimmable with Programmable Current

350–1050 mA / max. 75 W
350–1050 mA / max. 150 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.
 Power factor at full load: > 0.9
 Constant lumen output



Dimming

The dimming function is achieved by applying an analogue dimming signal to the nominal current.
 Dimming range: 10 to 100%
 If no dimming interface is connected, brightness will stay at 100%.

Programmability

The output current can be freely adjusted in 1 mA steps between 350 mA and 1050 mA (factory setting: 350 mA). An iProgrammer (Ref. No. 186428) and a PC running the respective VS software are required for programming purposes.



Connection details

Mains voltage: 220–240 V
 Mains frequency: 50–60 Hz
 Pre-assembled connection leads:
 primary: 0.75 mm², length: 300 mm
 secondary: 0.75 mm², length: 300 mm



Safety features

Protection against transient main peaks up to 6 kV (between L and N)



Double isolated

Electronic short-circuit protection
 Overload protection
 Protection against "no load" operation
 Degree of protection: IP65



Potection class II

The LEDs are thermally protected by the driver's NTC interface, which ensures the current will be reduced when a critical temperature is reached




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. all types	
	80 °C	70 °C
350–1050 mA	50,000	100,000
hrs.		

M47

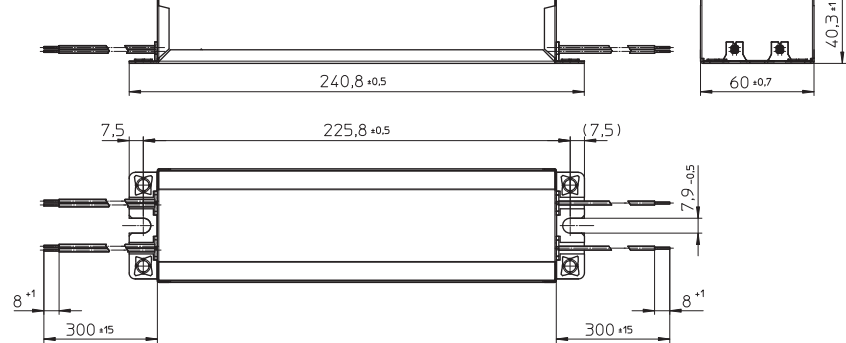

Products under development; preliminary technical datas

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output*	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			50–60 Hz		DC	DC	DC	% (230 V)	t_a	t_c	g
			V	mA	mA	V	V		°C	°C	

Dimensions: 240.8x60x40.3 mm

75	ECXd 1050G.145	186440	220–240	387–355	350–1050 ±5%	30–110	< 150	> 88	–40 to 60	80	1050
150	ECXd 1050G.146	186442	220–240	757–694	350–1050 ±5%	85–260	< 310	> 90	–40 to 60	80	1050

* Depends on the adjusted current output



PrimeLine LED Drivers – Dimmable

700, 1000, 1400 mA / max. 90 W

The nominal current can be set to 700 mA, 1000 mA, 1400 mA with a dip switch or it can be adjusted with a DALI signal.

Electrical characteristics

Secondary side switching of LED modules is allowed (hot wiring).

Power factor at full load: > 0.98

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 10 to 100%

If no dimming interface is connected, brightness will stay at 100%.

MidNight – Multi-Step dimming

The MidNight concept is based on dimmable ballasts for integration in lampposts; these ballasts can be programmed to create different light scenes with different dimm settings.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.75-2.5 mm²

Safety features

Protection against transient main peaks

up to 2 kV (between L and N) and

up to 4 kV (between L, N and PE)

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.		
	186367		
700 mA	70 °C	60 °C	
1000 mA	80 °C	70 °C	
1400 mA	85 °C	75 °C	
hrs.	50,000	100,000	



See page 235-242

K37

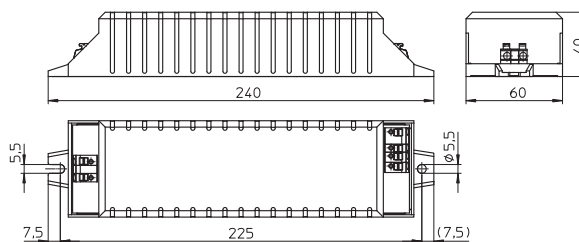

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			50-60 Hz		DC	DC	DC	% (230 V)	t_a	t_c	
			V	mA	mA	V	V		°C	°C	g

K37 – Dimensions: 240x60x40 mm

82	ECXd 1400.096	186367	220-240	450-150	700 ±5%	43-117	< 120	> 90	-40 to 50	70	445
90					1000 ±5%	33-91			-40 to 45	80	
					1400 ±5%	22-64			-40 to 40	85	

ComfortLine LED Drivers – Dimmable

700 mA / max. 75, 100 and 150 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Dimming

The dimming function is achieved by applying an analogue dimming signal to the nominal current.

Dimming range: 10 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 120-277 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 2x0.75 mm²

secondary: 4x0.75 mm²

Safety features

Protection against transient main peaks up to 6 kV (between L and N)

Electronic short-circuit protection

Overload protection

Overtemperature protection (186402)

Protection against "no load" operation

Degree of protection: IP65

Protection class II



Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.			
	186400	186402	186401	
700 mA	85 °C	75 °C	80 °C	70 °C
hrs.	50,000	100,000	50,000	100,000




See page 264

M59.1

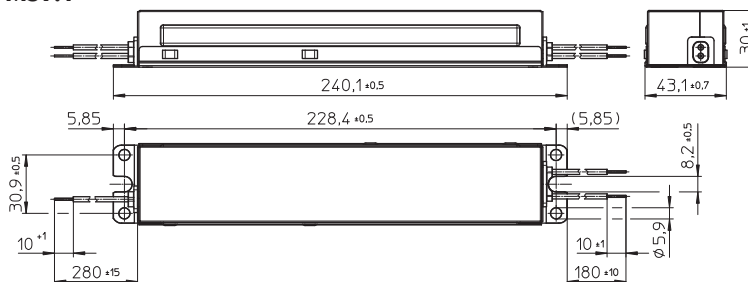

M59.2

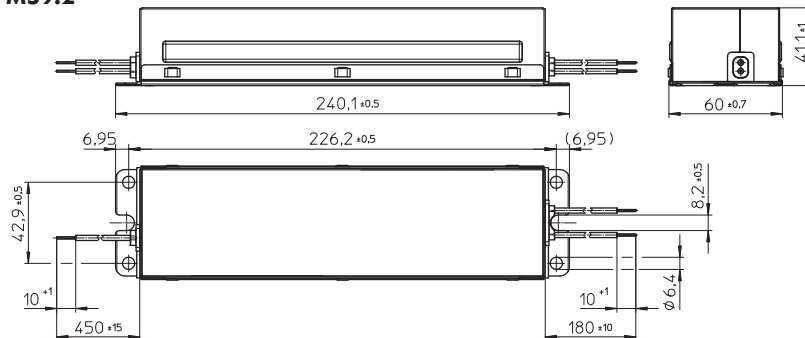

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			50-60 Hz		DC	DC	DC	% (230 V)	t_a	t_c	g
			V	mA	mA	V	V		°C	°C	
M59.1 – Dimensions: 240.1x43.1x30 mm											
75	ECXd 700G.117	186400	120-277	700-304	700 ±5%	54-107	< 250	> 88	-40 to 55	85	625
M59.2 – Dimensions: 240.1x60x41.1 mm											
100	ECXd 700G.118	186401*	120-277	917-398	700 ±5%	70-143	< 250	> 88	-40 to 55	80	1070
150	ECXd 700G.119	186402	120-277	1363-591	700 ±5%	107-210	< 250	> 88	-40 to 55	85	1070

* Products under development; preliminary technical datas

ComfortLine LED Drivers – Dimmable

1050 mA / max. 60 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.96

Dimming

The dimming function is achieved by applying an analogue dimming signal to the nominal current.

Dimming range: 10 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ± 10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 2x0.75 mm², length: 300 mm

secondary: 6x0.75 mm², length: 300 mm

Safety features

Protection against transient main peaks

up to 4 kV (between L and N)

Electronic short-circuit protection


Overload protection

Protection against "no load" operation

Degree of protection: IP67

Protection class II

SELV

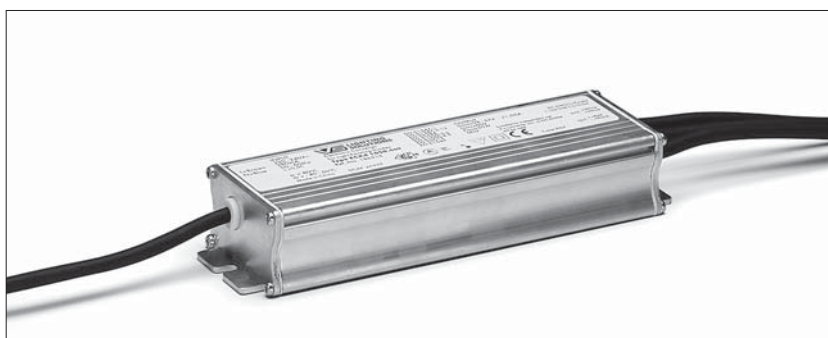

Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. 186316	
1050 mA	80 °C	70 °C
hrs.	50,000	100,000



See page 264

M57

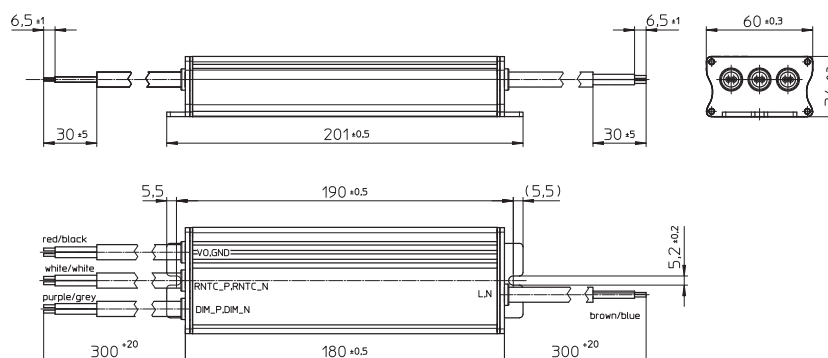

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			50-60 Hz		DC	DC	DC	% (230 V)	t_a	t_c	g
			V	mA	mA	V	V		°C	°C	
M57 – Dimensions: 201x60x34 mm											
60	ECXd 1050.069	186316	220-240	310-280	1050 ±5%	28-57	< 60	> 88	-40 to 50	80	730

ComfortLine LED Drivers – Dimmable

700 mA / max. 40 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.96

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 120-277 V $\pm 10\%$

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 2x0.75 mm², length: 228 mm

secondary: 4x0.75 mm², length: 228 mm

Safety features

Protection against transient main peaks up to 6 kV (between L and N)


Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP65

Protection class II

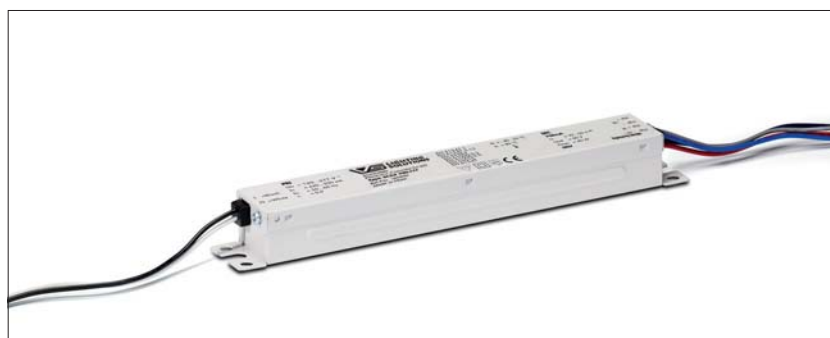

Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. 186490	
700 mA	80 °C	70 °C
hrs.	50,000	100,000



See page 264

M59

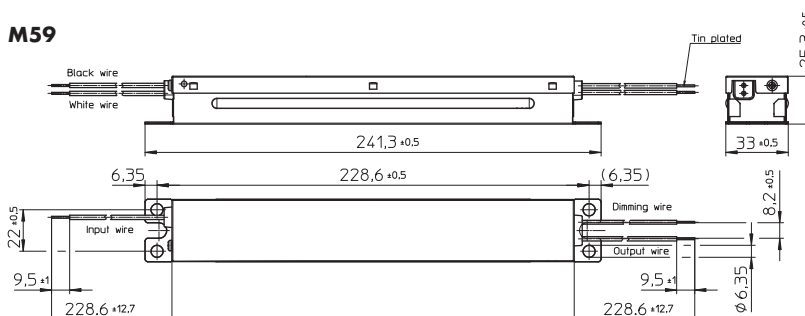

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			V	mA	DC mA	DC V	V	% (230 V)	t_a °C	t_c °C	g

M59 – Dimensions: 241.3x33x25.3 mm

40	ECXd 700G.177	186490	120-277	440-200	700 $\pm 5\%$	32-55	60	> 85	-30 to 55	80	398
----	---------------	---------------	---------	---------	---------------	-------	----	------	-----------	----	-----

ComfortLine LED Drivers – for Power Reduction

700/400 mA / max. 75, 100 and 150 W

These electronic LED constant current drivers are especially designed for use in street lighting systems. They provide a simple power-reduction option by connecting a further phase, which makes it possible to switch between 700 mA and 400 mA.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 120-277 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 3x0.75 mm²

secondary: 2x0.75 mm²

Power reduction

The nominal current output will be reduced by connecting the control phase (L_{ST}) to 57%.

Connecting L (black) and L_{ST} (orange) to the mains voltage reduces output by lowering the output current. If this function is not used, an additional terminal should be provided in the luminaire to fix the L_{ST} wire.



Safety features

Protection against transient main peaks up to 6 kV (between L and N)



Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP65


Protection class II

Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.			
	186397	186509	186398	
700 mA	85 °C	75 °C	80 °C	70 °C
hrs.	50,000	100,000	50,000	100,000

M59.1

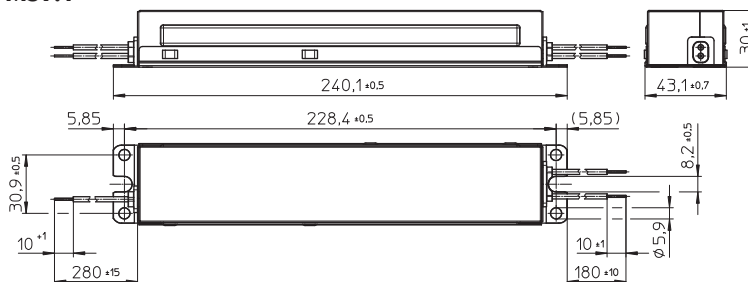

M59.2

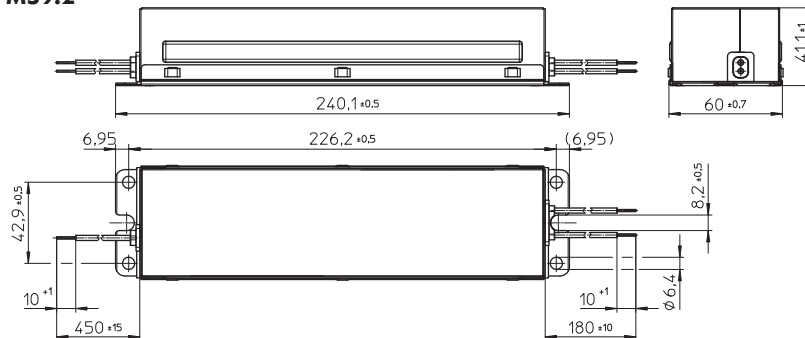

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			V	mA	DC mA	DC V	V	% (230 V)	t _a °C	t _c °C	g
M59.1 – Dimensions: 240.1 x 43.1 x 30 mm											
75	ECXe 700G.114	186397	120-277	700-304	700 ±5% 400 ±5%	54-107	< 250	> 88	-40 to 55	85	625
M59.2 – Dimensions: 240.1 x 60 x 41.1 mm											
100	ECXe 700G.115	186398*	120-277	917-398	700 ±5% 400 ±5%	70-143	< 250	> 88	-40 to 55	80	1070
150	ECXe 700G.190	186509*	120-277	1363-591	700 ±5% 400 ±5%	107-210	< 250	> 88	-40 to 55	85	1070

* Products under development; preliminary technical datas

ComfortLine LED Drivers

700 mA / max. 40 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 120-277 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 2x0.75 mm², length: 228 mm

secondary: 2x0.75 mm², length: 228 mm

Safety features

Protection against transient main peaks up to 6 kV (between L and N)


Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP65

Protection class II

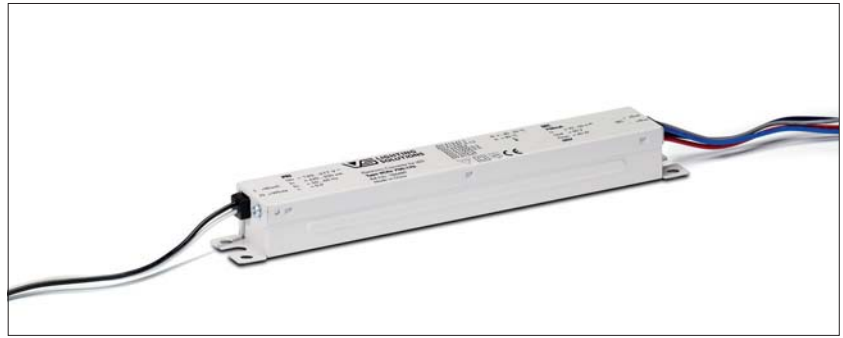


Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
700 mA	80 °C	70 °C
hrs.	50,000	100,000

M59

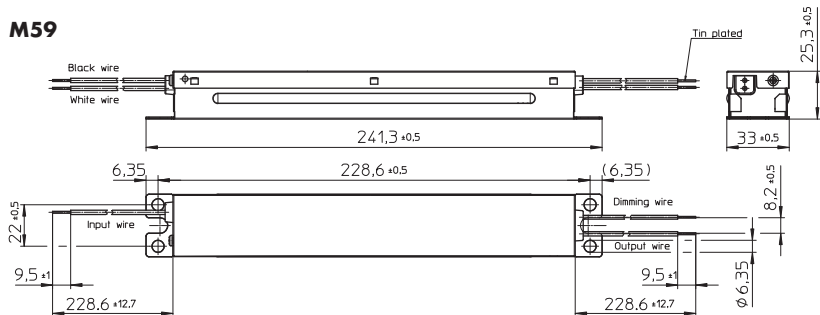

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			V	mA	DC mA	DC V	V	% (230 V)	t_a °C	t_c °C	g
M59 - Dimensions: 241.3x33x25.3 mm											
40	ECXe 700G.176	186489	120-277	440-200	700 ±5%	32-55	60	> 85	-30 to 55	80	393

ComfortLine LED Drivers

700 mA / max. 150 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 120-277 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

primary: 2x0.75 mm², length: 450 mm

secondary: 2x0.75 mm², length: 180 mm

Safety features

Protection against transient main peaks up to 6 kV (between L and N)



Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP65

Protection class II




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186399	
700 mA	85 °C	75 °C
hrs.	50,000	100,000

M59.2

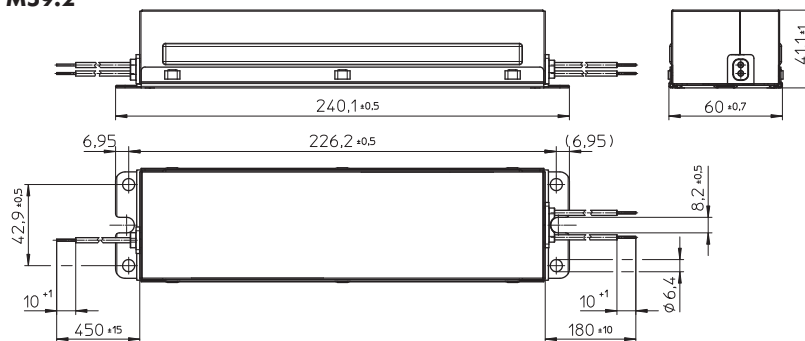

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	Ambient temperature	Casing temperature	Weight
W			V	mA	DC mA	DC V	V	% (230 V)	t_a °C	t_c °C	g

M59.2 - Dimensions: 240.1x60x41.1 mm

150	ECXe 700G.116	186399	120-277	1363-591	700 ±5%	107-210	< 250	> 88	-40 to 55	85	1070
-----	---------------	---------------	---------	----------	---------	---------	-------	------	-----------	----	------

ComfortLine LED Drivers

350 mA / max. 40 W

700 mA / max. 40 W

1050 mA / max. 40 W

These electronic LED constant current drivers are especially designed for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 120-277 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.75-2.5 mm²

Safety features

Protection against transient main peaks up to 4 kV (between L and N)

Electronic short-circuit protection

Overload protection


Protection against "no load" operation

Degree of protection: IP20

Protection class II



K39.2

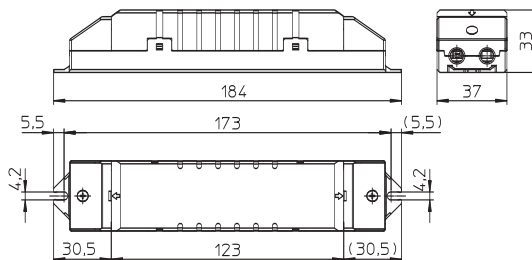

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.					
	186550		186551		186552	
350 mA	70 °C	60 °C	-	-	-	-
700 mA	-	-	70 °C	60 °C	-	-
1050 mA	-	-	-	-	75 °C	65 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000

Products under development; preliminary technical datas

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
Dimensions: 184 x 37 x 33 mm											
40	ECXe 350.207	186550	120-277	387-168	350 ±5%	78-114	< 120	> 86	-25 to 50	70	160
40	ECXe 700.208	186551	120-277	387-168	700 ±5%	39-57	< 60	> 86	-25 to 50	70	160
40	ECXe 1050.209	186552	120-277	387-168	1050 ±5%	26-38	< 60	> 86	-25 to 50	75	160

ComfortLine LED Drivers

350 mA / max. 42 W

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.97

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Push-in terminals: 0.75-2.5 mm²

Safety features

Protection against transient main peaks

up to 3 kV (between L and N) and

up to 4 kV (between L, N and PE)

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV equivalent




Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
	186175	
350	70 °C	60 °C
hrs.	50,000	100,000

K30

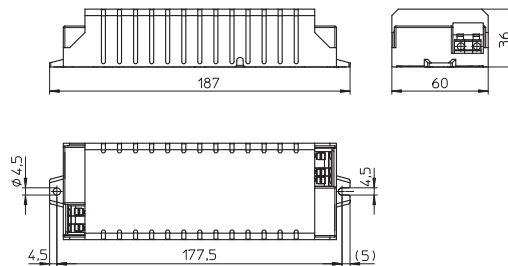

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
------------------	------	----------	--------------------------------	---------------------	----------------------------	---------------------------	--------------------------------------	--------------------------------------	------------------------------------	-----------------------------------	-------------

K30 - Dimensions: 187 x 60 x 36 mm

42	ECXe 350.015	186175	220-240	210-190	350 ±5%	40-115	120	> 90	-30 to 60	70	270
----	--------------	---------------	---------	---------	---------	--------	-----	------	-----------	----	-----

ComfortLine LED Drivers – Dimmable

700 mA / max. 112 W
1050 mA / max. 126 W
With 12 V interface

These electronic LED constant current drivers are designed for use in industrial hall lighting systems.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Standby losses: < 0.5 W

Dimming

The dimming function is achieved by applying a PWM signal to the nominal current.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ± 10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

The LEDs are thermally protected by the driver's NTC interface, which ensures the current will be reduced when a critical temperature is reached.

NTC at LED module 10 kΩ (Type Nurate NCP18XH103J03RB)	
R (kΩ)	Nominal current (%)
10	100
< 1.49	60
< 1.13	0 (off)



See page 235-242



See page 264




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No.							
	186299		186303		186300		186304	
700 mA	70 °C	60 °C	-	-	80 °C	70 °C	-	-
1050 mA	-	-	75 °C	65 °C	-	-	90 °C	80 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000	50,000	100,000

M36

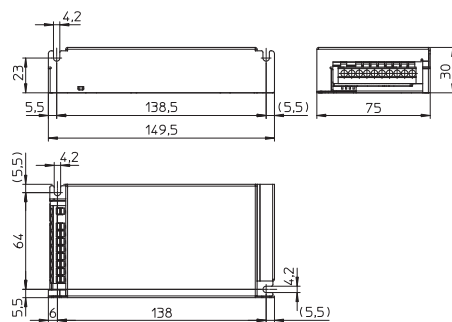

K38 with cord grip

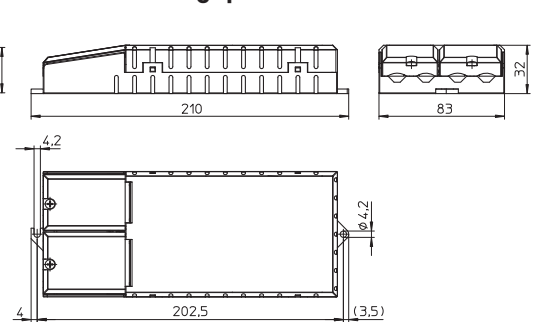

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	12 V interface	Ambient temperature	Casing temperature	Weight
W			0 Hz, 50-60 Hz V	mA	DC mA	DC V	DC V	% (230 V)	max. 2 W	t _a °C	t _c °C	g

M36 – Dimensions: 149.5 x 75 x 30 mm

112	ECXd 700.058	186299	198-264	595-445	700 ±5%	85-160	< 450	> 91	yes	-25 to 50	70	288
			220-240	550-510								
126	ECXd 1050.060	186303	198-264	660-495	1050 ±5%	85-120	< 450	> 91	yes	-25 to 50	75	288
			220-240	630-590								

K38 with cord grip – Dimensions: 210 x 83 x 32 mm

112	ECXd 700.058	186300	198-264	595-445	700 ±5%	85-160	< 450	> 91	yes	-25 to 50	80	335
			220-240	550-510								
126	ECXd 1050.060	186304	198-264	660-495	1050 ±5%	85-120	< 450	> 91	yes	-25 to 50	90	335
			220-240	630-590								

ComfortLine LED Drivers – Dimmable and Adjustable

900/1050/1200/1400 mA / max. 60.2 W

The dial can be used to set the current output to 900 mA (1), 1050 mA (2), 1200 mA (3) or 1400 mA (4).

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Dimming

The dimming function is achieved by applying a PWM signal.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ± 10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

Push-in terminals: 0.2-1.5 mm²

(NTC interface: 0.2-0.5 mm²)

Safety features

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV

The LEDs are thermally protected by the driver's NTC interface, which ensures the current will be reduced when a critical temperature is reached.



NTC at LED module 220 kΩ	
R (kΩ)	Nominal current (%)
34	100
27	60
16	0 (off)

1-10V	
--------------	--




See page 264

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 186208	
all	85 °C	75 °C
hrs.	50,000	100,000

K3

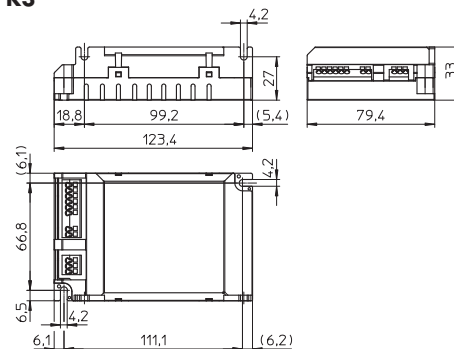

Max. output W	Type	Ref. No.	Mains voltage 0 Hz, 50/60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t _a °C	Casing temperature t _c °C	Weight g
K3 – Dimensions: 123.4x79.4x33 mm											
38.7/ 45.1/ 51.6/ 60.2	ECXd 1400.025	186208	198-264 220-240	315-290 350-265	900 +5/-10%/ 1050 +5/-10%/ 1200 +5/-10%/ 1400 +5/-10%	20-43	< 52	> 85	-20 to 50	85	230

ComfortLine LED Drivers – Dimmable and Adjustable

350/500/600/700 mA / max. 39.9 W

The dial can be used to set the current output to 350 mA (1), 500 mA (2), 600 mA (3) or 700 mA (4).

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: 0.95

Dimming

The dimming function is achieved by applying a PWM signal.

Dimming range: 3 to 100%

If no dimming interface is connected, brightness will stay at 100%.

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz

Push-in terminals: 0.2-1.5 mm²

(NTC interface: 0.2-0.5 mm²)

Safety features

Electronic short-circuit protection

Overload protection


Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV

The LEDs are thermally protected by the driver's NTC interface, which ensures the current will be reduced when a critical temperature is reached.

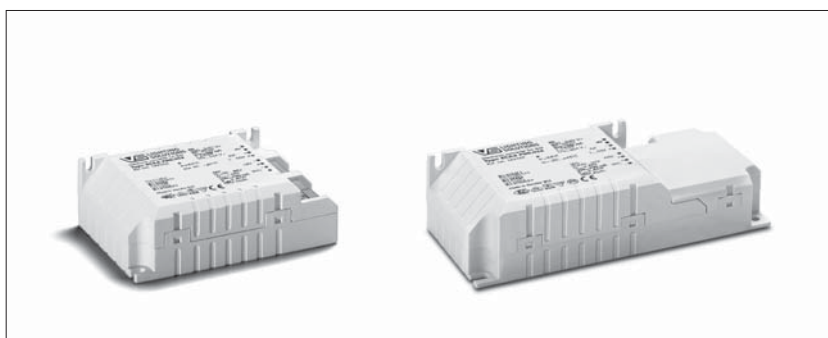

NTC at LED module 220 kΩ	
R (kΩ)	Nominal current (%)
34	100
27	60
16	0 (off)

1-10V	
-------	--




See page 264

Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
	75 °C	65 °C
hrs.	50,000	100,000

K2



K2 with cord grip

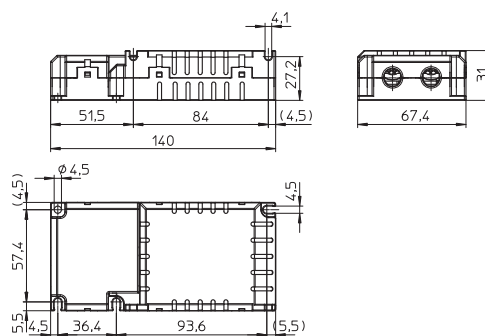

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency	Ambient temperature	Casing temperature	Weight
W			0 Hz, 50/60 Hz		DC	DC	DC	at full load	t _a	t _c	g
			V	mA	mA	V	V	% (230 V)	°C	°C	

K2 – Dimensions: 103.6x67.4x31 mm

19.95/28.5/34.2/39.9	ECXd 700.024	186326	176-264	265-175	350 +5/-10% /	20-57	60	> 85	-20 to 50	75	190
			220-240	220-200	500 +5/-10% /						
					600 +5/-10% /						
					700 +5/-10%						

K2 with cord grip – Dimensions: 140x67.4x31 mm

19.95/28.5/34.2/39.9	ECXd 700.024	186327	176-264	265-175	350 +5/-10% /	20-57	60	> 85	-20 to 50	75	220
			220-240	220-200	500 +5/-10% /						
					600 +5/-10% /						
					700 +5/-10%						

ComfortLine LED Drivers

700 mA / max. 112 W
1050 mA / max. 126 W
With 12 V interface

These electronic LED constant current drivers are designed for use in industrial hall lighting systems.



Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.95

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 198-264 V DC, 0 Hz

(can be reduced to 176 V with reduced service life time)

Push-in terminals: 0.2-1.5 mm²

Safety features

Electronic short-circuit protection

Overload and overtemperature protection

Protection against "no load" operation

Degree of protection: IP20

Protection class I

The LEDs are thermally protected by the driver's NTC interface, which ensures the current will be reduced when a critical temperature is reached.

NTC at LED module 10 kΩ


(Type Nurate NCP18XH103J03RB)

R (kΩ)	Nominal current (%)
10	100
< 1.49	60
< 1.13	0 (off)

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.							
	186297		186301		186298		186302	
700 mA	70 °C	60 °C	–	–	80 °C	70 °C	–	–
1050 mA	–	–	75 °C	65 °C	–	–	90 °C	80 °C
hrs.	50,000	100,000	50,000	100,000	50,000	100,000	50,000	100,000

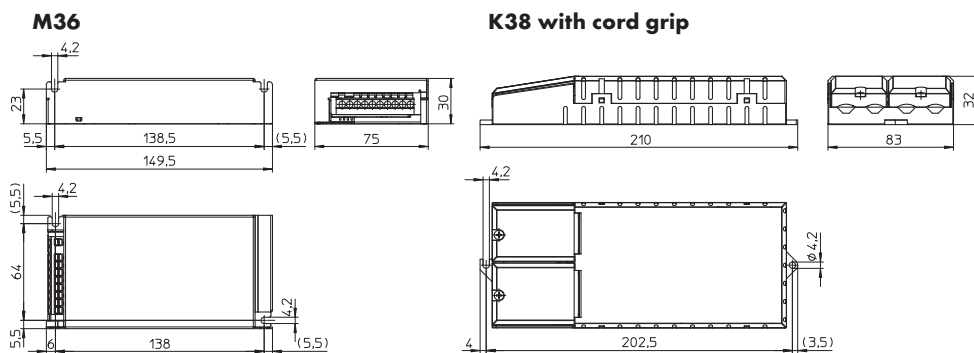

Max. output	Type	Ref. No.	Mains voltage	Mains current	Current output	Voltage output	Max. voltage without load	Efficiency at full load	12 V interface	Ambient temperature	Casing temperature	Weight
W			0 Hz, 50-60 Hz	mA	DC	DC	DC	% (230 V)	max. 2 W	t_a °C	t_c °C	g

M36 – Dimensions: 149.5 x 75 x 30 mm

112	ECXe 700.057	186297	198-264	595-445	700 ±5%	85-160	< 450	> 91	yes	-25 to 50	70	288
			220-240	550-510								
126	ECXe 1050.059	186301	198-264	660-495	1050 ±5%	85-120	< 450	> 91	yes	-25 to 50	75	288
			220-240	630-590								

K38 with cord grip – Dimensions: 210 x 83 x 32 mm

112	ECXe 700.057	186298	198-264	595-445	700 ±5%	85-160	< 450	> 91	yes	-25 to 50	80	335
			220-240	550-510								
126	ECXe 1050.059	186302	198-264	660-495	1050 ±5%	85-120	< 450	> 91	yes	-25 to 50	90	335
			220-240	630-590								

EasyLine LED Drivers

700–3200 mA / max. 50–230 W

These electronic LED constant current drivers are especially designed for use in industrial hall lighting systems as well as for use in street lighting systems.

Electrical characteristics

Secondary side switching of LED modules is not allowed.

Power factor at full load: > 0.9

Connection details

Mains voltage: 220–240 V ±10%

Mains frequency: 50–60 Hz

Pre-assembled connection leads:

primary: 3x2.08 mm², length: 320 mm

secondary: 2x2.08 mm², length: 320 mm

Safety features

Protection against transient main peaks

up to 1.5 kV (between L and N)

Electronic short-circuit protection

Overload protection

Protection against "no load" operation

Degree of protection: IP67

Protection class I




Expected service life time


at operation temperatures at t_c point

Operation current	Ref. No. all types	
		75 °C
hrs.	30,000	50,000


M56

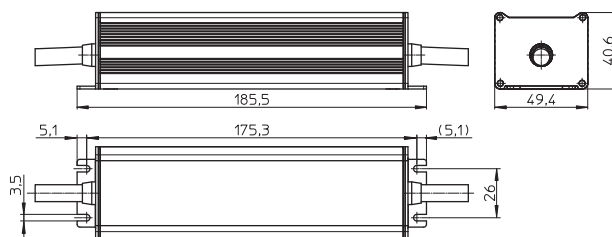

M58

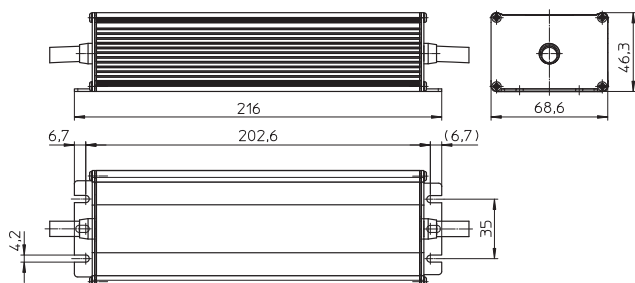

M58.1

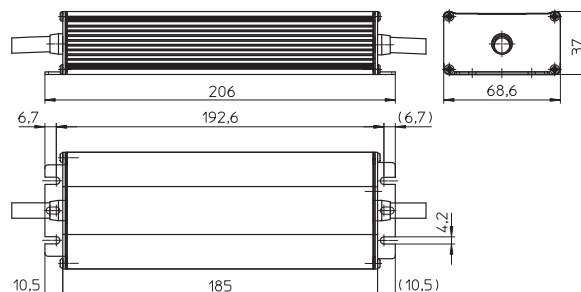

Max. output W	Type	Ref. No.	Mains voltage 50–60 Hz V	Mains current mA	Current output DC mA	Voltage output DC V	Max. voltage without load DC V	Efficiency at full load % (230 V)	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
M56 – Dimensions: 185.5x49.4x40.6 mm											
50	ECXe 700.156	186452	220–240	255–235	700 ±5%	35–72	75	> 88	-30 to 50	75	520
75	ECXe 1050.157	186453	220–240	380–350	1050 ±5%	35–72	75	> 88	-30 to 50	75	520
M58 – Dimensions: 216x68.6x46.3 mm											
100	ECXe 1400.158	186454	220–240	510–470	1400 ±5%	30–72	75	> 90	-30 to 50	75	600
125	ECXe 1700.159	186455	220–240	625–580	1700 ±5%	30–72	75	> 90	-30 to 50	75	600
M58.1 – Dimensions: 206x68.6x37 mm											
150	ECXe 2100.160	186456	220–240	750–690	2100 ±5%	45–72	85	> 90	-30 to 50	75	840
175	ECXe 2400.167	186510*	220–240	910–850	2400 ±5%	45–72	85	> 85	-30 to 50	75	840
200	ECXe 2800.168	186477*	220–240	1040–960	2800 ±5%	45–72	85	> 85	-30 to 50	75	840
230	ECXe 3200.169	186478*	220–240	1200–1100	3200 ±5%	45–72	85	> 85	-30 to 50	75	840

*Products under development

iProgrammer

For programming LED drivers

The iProgrammer is designed to let you configure LED drivers using the 3C function.

Using DALI commands, the iProgrammer enables various functions to be configured on all VS LED drivers that feature the "3C" symbol.

As an example, not only can the current be set to a precise level, but programming functions for the street lighting zone can also be transferred.

Please refer to the manual at product page under www.vossloh-schwabe.com for detailed configuration procedures.

Technical notes

Configuration interface: DALI

Ambient temperature t_a : 5 to 50 °C

Push-in terminals: 0.2-1.5 mm²

Degree of protection: IP20

Connections

- Mains connection: 220-240 V AC/50-60 Hz
- Max. power consumption: 5 W
- USB 2.0

Software download


See product page under www.vossloh-schwabe.com

Functions


Configuring "3C" LED drivers



K3.2

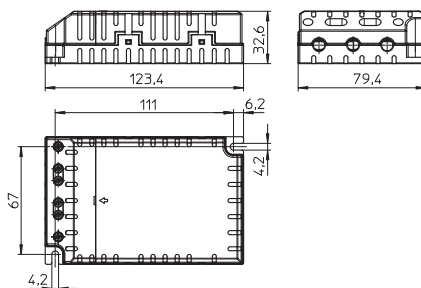

Connection

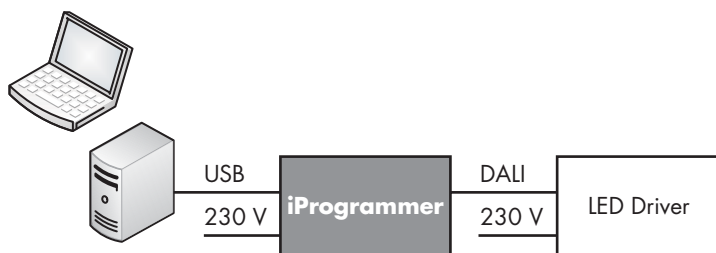

Type	Ref. No.	Connection to PC/Laptop	Functions	Dimensions (LxWxH) mm	Weight g
iProgrammer	186428	USB 2.0	Configuring "3C" LED drivers	123.4x79.4x32.6	135

LUMINAIRE PROTECTION AND POWER ADJUSTMENT



LUMINAIRE PROTECTION AND POWER ADJUSTMENT

This chapter presents inrush current limiters, electronic components to protect luminaires against mains surges, power reduction products and components with which the output current of LED drivers can be adjusted.



Luminaire Protection Device

For electronic devices

When electronic components form part of lighting systems, it is often necessary to protect such components against electric overloads (power surges).

These can be caused by switching inductive loads or by atmospheric discharges such as lightning striking the mains or the ground. A further cause can be induced voltages from neighbouring cables when working with leading-edge phase-cutting controls.

The protection unit reduces over-voltages at the connection terminals of electronic components. The remaining residual voltage is then reduced to a respective protective level, based on the discharge current.

SP 230/10 K


Suitable for luminaires of protection class II

Dimensions (LxWxH): 32x22x13 mm

Weight: 20 g

Connecting: solid wire, length: 50 mm

Ref. No.: 147230



SPC 230/10 K

If the protective luminaire component overloads, the connected lighting circuit will be interrupted. This cut-out function makes it easier to detect the end of life of the protective component, facilitates quick replacement by maintenance staff and provides reliable protection for lighting components.

Suitable for luminaires of protection class II


Type 3 product

Dimensions (LxWxH): 53x28x27 mm

Weight: 50 g

Screw terminals: 0.5-1.5 mm²

Ref. No.: 142736



SP 3/230/10 K

Suitable for luminaires of protection class I


Type 3 product

Dimensions (ØxH): Ø 36x75 mm

Weight: 60 g

Screw terminals: 0.75-4 mm²

Ref. No.: 147233

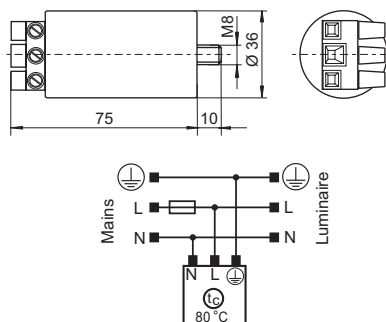

Type	Ref. No.	Voltage 50/60 Hz V ±10%	Max. load current A	Max. impulse voltage U _{OC} (V)	Discharge current (8/20 μs)		Protection level at discharge current of 1000 A	Fuse max. A	Max. permitted casing temperature °C	Min. permitted ambient temperature °C	Fixation
					I _N (A)	I _{max.} (A)					
SP 230/10 K	147230	220-240	—	10000	5000	10000	≤ 850 V	25	80	-30	—
SPC 230/10 K	142736	220-240	16	10000	5000	10000	≤ 850 V	16	80	-30	M8x10
SP 3/230/10 K	147233	100-277	—	10000	5000	10000	≤ 1000 V	25	80	-30	M8x10

Luminaire Protection Device

For electronic devices

These protective components are fitted with an LED indicator. Once the end of the component's life has been reached, the green LED goes out or the red LED lights up and the protective component has to be replaced.

SPC 230/10 K/i

If the protective luminaire component overloads, the connected lighting circuit will be interrupted. This cut-out function makes it easier to detect the end of life of the protective component, facilitates quick replacement by maintenance staff and provides reliable protection for lighting components.

Suitable for luminaires of protection class II

Type 3 product





These protective luminaire components feature a green indicator LED that goes out if the protective function fails.

Dimensions (LxWxH): 74x34x27 mm

Weight: 100 g

Screw terminals: 0.5-2.5 mm²

Ref. No.: 142737

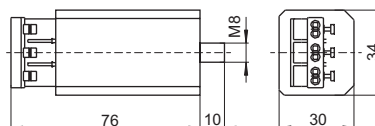

SP 3/230/10 K/i

Suitable for luminaires of protection class I

Type 3 product

These protective luminaire components feature an indicator LED that lights up in red if the protective function fails.

With an integrated thermal fuse

Dimensions (LxWxH): 76x34x30 mm

Weight: 105 g

Screw terminals: 1-2.5 mm² for solid leads

Ref. No.: 142739

Type	Ref. No.	Voltage 50/60 Hz V ±10%	Max. load current A	Max. impulse voltage U _{OC} (V)	Discharge current (8/20 μs) I _N (A) I _{max} (A)	Protection level at discharge current of 1000 A	Fuse max. A	Max. permitted casing temperature °C	Min. permitted ambient temperature °C	Fixation
SPC 230/10 K/i	142737	220-240	16	10000	5000 10000	≤ 1000 V	16	80	-30	M8x10
SP 3/230/10 K/i	142739	100-277	6	10000	5000* 10000*	≤ 1000 V	16	80	-30	M8x10

* Discharge current: at 5000 A up to 10 strikes; at 10000 A up to 1 strike

Luminaire Protection Device

For electronic devices

These protective components are fitted with an LED indicator. Once the end of the component's life has been reached, the LED goes out and the protective component has to be replaced. With an integrated thermal fuse

SPC 3/230/10 K/i

Suitable for luminaires of protection class I

Type 3 product


At the end of the service life time of a protective luminaire component, the voltage supply to the LED driver is permanently disrupted; this status is shown by the green indicator LED going out.

Dimensions (LxWxH): 74x34x27 mm, Weight: 100 g

Screw terminals: 0.75-2.5 mm²

Lead ground terminal: stranded conductor, 2.5 mm², silicone insulation, length: 150 mm

Ref. No.: 142738

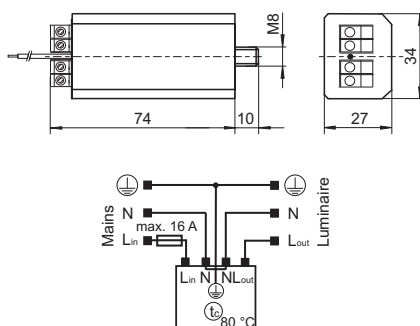

SP230/10 K/HS/i

Type 3 product



The green LED light will go out if the protective function fails.

Dimensions (LxWxH): 90x17.2x63 mm, Weight: 45 g

Screw terminals: 0.5-2.5 mm²

Fixation on DIN installation rail

Ref. No.: 147240

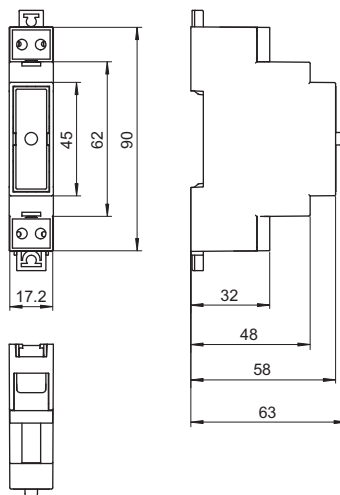

Type	Ref. No.	Voltage 50/60 Hz V ±10%	Max. load current (A)	Protection level at discharge current of 1000 A L-N (V) L-PE (V)	Max. impulse voltage U _{OC} (V)	Discharge current* (8/20 μs) I _N (A) I _{max} (A)	Fuse max. A	Max. permitted casing temperature (°C)	Min. permitted ambient temperature (°C)	Fixation
SPC 3/230/10 K/i	142738	100-277	16	< 1100 1520	10000	5000 10000	16	80	-30	M8x10
SP230/10 K/HS/i	147240	220-240	16	< 1000 -	10000	5000 10000	16	80	-30	-

* Discharge current: at 5000 A up to 10 strikes; at 10000 A up to 1 strike



Inrush Current Limiter ESB-6K

Limits capacitive inrush currents of electronic ballasts and converters for LED modules

Due to their capacitive nature, these products generate high inrush currents. By temporarily activating a limiting resistor, the inrush current is reduced to an uncritical value (see graph below).

Several LED drivers or electronic ballasts can be connected downstream under consideration of the maximum permissible continuous current of the inrush current limiter.

The device thus prevents any automatic circuit breakers from being triggered or any damage from being caused to upstream relay contacts.

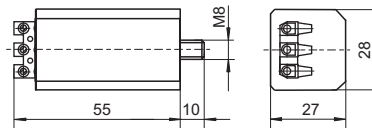

ESB-6K

Casing: PC

Dimensions (LxWxH): 55x28x27 mm

Weight: 61 g

Screw terminals: 0.5-1.5 mm²

Ref. No.: 149820


Type	Ref. No.	Nominal voltage 50-60 Hz V ±10%	Power consumption W	Max. direct current A	Limiting resistor Ω	Period of limitation ms	Max. permitted casing temperature (°C)	Min. permitted ambient temperature (°C)	Fixation
ESB-6K	149820	220-240	0.25	6	20	approx. 18	80	-30	M8x10

Example using an 150 W LED driver

Brown: with ICL (ESB)

Blue: without ICL (ESB)

1 V = 1 A

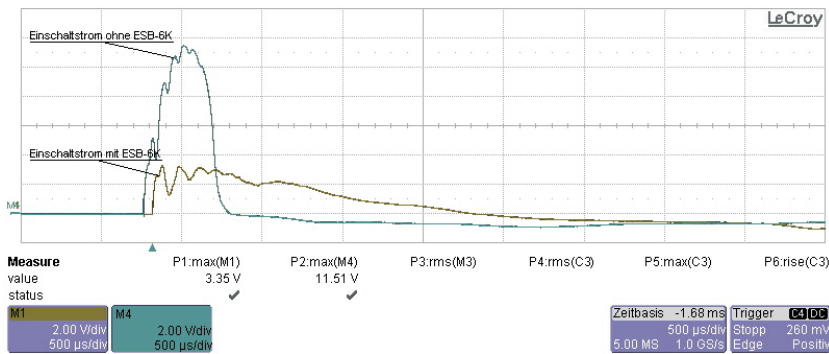

Power Switch PS 16 K

For electronic LED drivers

Given centralised control of an LED driver's L_{ST} control input, the existing cable capacities of the control line can lead to switching errors.

This can be prevented by installing a PS 16 K power switch, which features a potential-free and galvanically isolated switching contact.

The PS 16 K power switch complies with EN 61347 and is also suitable for use in luminaires of protection class I and II.

The power switch complies with the specification of DIN EN 61347.

PS 16 K



Casing: PC

Dimensions (LxWxH): 74x34x27 mm

Weight: 100 g

Screw terminals: 0.75-2.5 mm²

Ref. No.: 142185

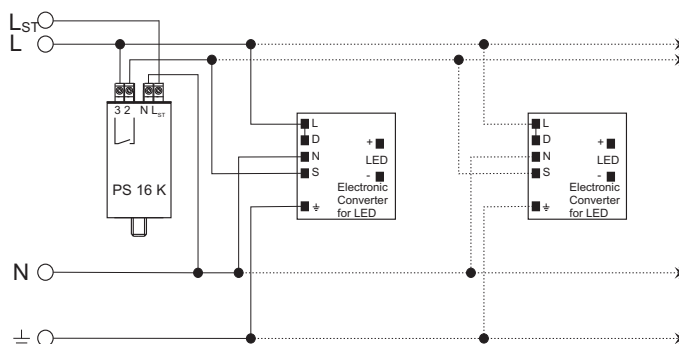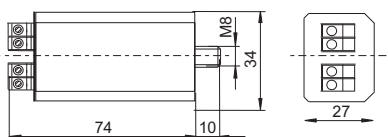

Type	Ref. No.	Control voltage V ±10%	Max. switching capacity (VA)	Max. switching voltage (V)	Max. contact current A λ = 1 λ = 0.6	Inherent heating K	Max. permitted casing temperature (°C)	Min. permitted ambient temperature (°C)	Fixation
PS 16 K	142185	230 V/50 Hz 220 V/60 Hz	4000	400	16 10	< 25	80	-30	M8x10



Automatic Power Switch for LED Drivers – PR 12 K LC

The PR 12 K LC can be used for power switching of LED drivers with LST control input. A control phase is not needed. Once it's connected to the mains supply voltage the power switch will switch automatically.

The power switch complies with the specification of DIN EN 61347 and is suitable for the application in luminaires of protection class I and II.


PR 12 K LC

Casing: PC
 Dimensions (LxWxH): 76x34x30 mm
 Weight: 100 g
 Screw terminals: 0.75 - 2.5 mm²
Ref. No.: 142170

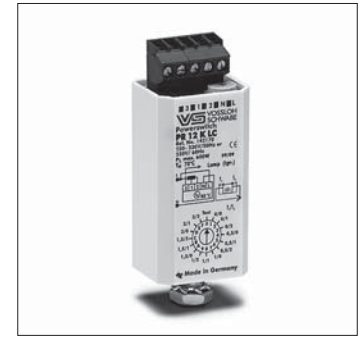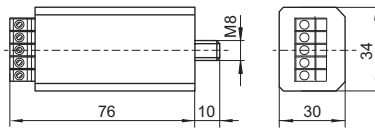

Wiring diagram

For example with VS LED drivers ECXd 700.023 (Ref. No. 186509)

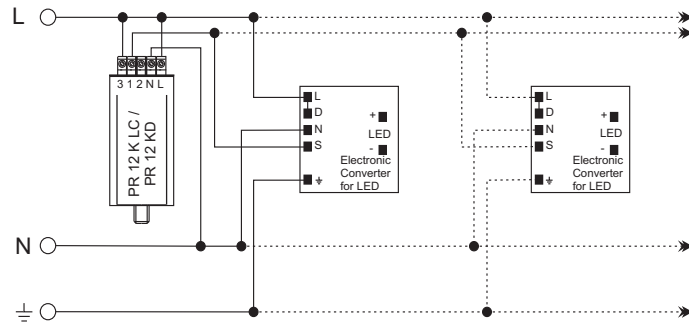

Type	Ref. No.	Nominal voltage/frequency V ±10%	Max. switching capacity (VA)	Max. contact current (A) λ = 0.5 λ = 1	Internal loss W	Inherent heating K	Switching-time	Max. permitted casing temperature (°C)	Min. permitted ambient temperature (°C)	Fixation
PR 12 K LC	142170	220-230 V/50 Hz 220 V/60 Hz*	3000	8 12	< 1	< 12	selectable	80	-30	M8x10

* 120-240 V ±10% available on request


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Programmable Power Switch for LED Drivers – PR 12 KD

The PR 12 KD can be used for power switching of LED drivers with LST control input. A control phase is not needed. The constant switching-time is selectable.

The left side of the rotary switch is used for reset to full power after eleven hours; the right side is for continuous power reduction after programmed time has been reached.

The power switch complies with the specification of DIN EN 61347 and is suitable for the application in luminaires of protection class I and II.

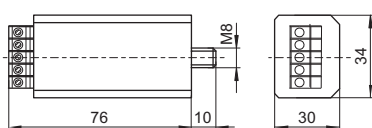

PR 12 KD

Casing: PC

Dimensions (LxWxH): 76x34x30 mm


Weight: 100 g

Screw terminals: 0.75–2.5 mm²

Ref. No.: 142150

Wiring diagram

For example with VS LED drivers ECXd 700.023 (Ref. No. 186509)

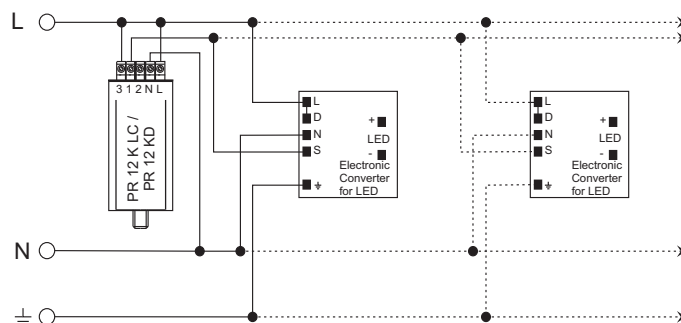

Type	Ref. No.	Nominal voltage/frequency V ±10%	Max. switching capacity (VA)	Max. contact current (A) $\lambda = 0.5$ $\lambda = 1$	Internal loss W	Inherent heating K	Switching-time*	Max. permitted casing temperature (°C)	Min. permitted ambient temperature (°C)	Fixation
PR 12 KD	142150	220–230 V/50 Hz 220 V/60 Hz**	3000	8 12	< 1	< 12	selectable	80	–30	M8x10

* Switching-time selectable: 3 | 3.5 | 4 | 4.5 | 5 | 5.5 | 6 hrs. at 50 Hz

** 120–240 V ±10% available on request

Switch Units for Electronic Operating Devices with 1–10 V Interface

Vossloh-Schwabe's switch units are designed to enable one-step power reduction of lamps (FL, CFL, LED, HS, HI and C-HI) with the help of the respective electronic ballast or converter.

To this end, the switch units utilise the 1–10 V interface of the control gear unit. The switch unit is mainly intended for outdoor luminaires in systems with or without a control phase.

Dimensions (LxWxH): 56x28x27 mm

Casing: PC

Screw terminals: 0.75–2.5 mm²

Max. permissible casing temperature t_c : 80 °C

Min. permissible ambient temperature t_a : -30 °C

Fastening: plastic male nipple with pre-assembled washer and nut

Power reduction SU 1–10 V K for lighting systems featuring an L_{ST} control phase


The switch unit employs a positive switching to reduce power, i.e. power is reduced when the control phase is switched off (L_{ST} = 0 V).

The 1–10 V interface of the electronic ballast is addressed at the moment that power reduction is effected.


Power reduction PR 1–10 V K LC for lighting systems without a control phase

This switch unit can be used to effect power reduction in lighting systems that do not feature a control phase.


The 1–10 V interface is addressed on the basis of the fundamental operating principle used by Vossloh-Schwabe's PR 12 K LC power switch (details of which can be made available on request). This power switch is capable of determining the starting time of reduced-power operation over the measured operating time of a lighting system. As a result, it is no longer necessary to spend valuable time modifying the power-reduction unit to suit the continually changing day-night cycle; changing the clocks in line with daylight saving measures in the summer and winter is equally unnecessary. The 1–10 V interface of the electronic ballast is addressed as soon as the system is switched to reduced power.



Circuit diagram SU 1–10 V K

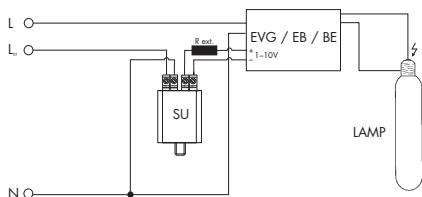

Circuit diagram PR 1–10 V K LC

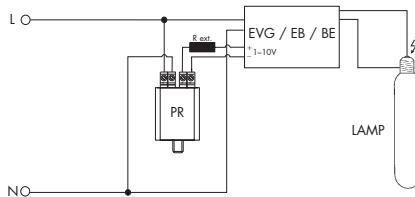

Type	Ref. No.	Control voltage L _{ST} V ±10%, 50/60 Hz	Externally (on site) connected resistor (R _{ext.}) kΩ (min. 0.1 W)	Inherent heating K	Weight g
For lighting systems with control phase					
SU 1–10 V K	149992	220–240	1–70	< 10	50
For lighting systems without control phase					
PR 1–10 V K LC	149993	–	1–70	< 10	50

Resistor Network for LED Drivers

This resistor network is used to adjust the output currents of LED drivers. 255 different resistance values can be adjusted in 10-Ohm steps within a range from 0 to 2550 Ohm by connecting the SU 1-10 V K and PR 1-10 V K LC power switches. As an example, this makes it possible to even out differences in luminous flux common to LED luminaires.

The component is designed for use in protection class II luminaires.

R10-1280

Casing: PC

Dimensions [LxWxH]: 32x25x15 mm


Weight: 20 g

Connection leads, solid: 0.5 mm²

Lead length: 50 mm

Ref. No.: 149800

Resistor network for LEDset interfaces on request



Type	Ref. No.	Number of dip switch pcs.	Max. internal loss of resistors W	Max. voltage at resistors V	Max. permitted casing temperature °C	Min. permitted ambient temperature °C
R10-1280	149800	8	0,25	200	80	-30

LED COMPONENTS FOR 24 V SYSTEMS



With its 24 V system, Vossloh-Schwabe is responding to the trend towards market harmonisation and simplification of LED control technology.

The modules are operated at 24 V DC converters and the constant-current control is effected on the LED circuit board.

Typical applications

- General lighting
- Furniture lighting
- Architectural lighting
- Lighting of complex structures
- Entertainment
- Shop design


The specifications contained in this catalogue can change due to technical innovations. Any such changes will be made without separate notification.

Please read the safety and installation instructions on the individual products as well as further technical information provided in the extensive product descriptions at www.vossloh-schwabe.com.

LEDLine Flex SMD Professional Indoor White

Built-in PCB lighting modules

The LEDLine Flex SMD Professional Indoor is fitted with SMD LEDs on a flexible printed circuit board of only approx. 0.4 mm thickness. Even the most complex structures can be illuminated thanks to the use of an extremely pliable foil. LEDLine Flex SMD Professional Indoor can be separated into segments of 100 mm lengths without loss of function. This product is available in a continuous length of up to 10 m. Installation is achieved via double-sided adhesive tape affixed to the rear of the PCB.



Technical notes

Dimensions LEDLine Flex SMD Professional Indoor


LxW mm	LEDs pcs.	Single steps	Length mm	SMDs pcs.
10000x10	600	100	100	6

Allowed operating temperature at t_c point:
-20 to 75 °C

Wide beam angle: 120°

Voltage supply: 24 V

Power consumption per step (100 mm): 0.53 W

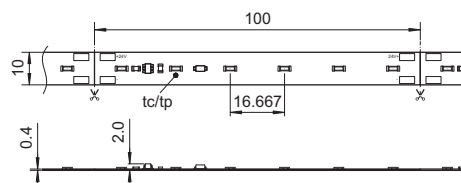

Typical applications

- Architectural lighting
- Illumination of complex structures
- Entertainment, shop design
- Marking paths, stairs, etc.
- Furniture lighting
- Light advertising

Type	Ref. No.	Colour	Correlated colour temperature K	Current A	Typ. luminous flux* lm	Beam angle* °	Max. power W	CRI R _a
WU-M-456-27K	551700	warm white	2700 -120/+170	2.2	4100	120	53	> 80
WU-M-456-30K	550532	warm white	3000 -130/+220	2.2	4200	120	53	> 80
WU-M-456-40K	550533	neutral white	4000 -290/+260	2.2	4600	120	53	> 80
WU-M-456-50K	550534	cool white	5000 -255/+310	2.2	4900	120	53	> 80
WU-M-456-65K	550535	cool white	6500 -480/+540	2.2	5200	120	53	> 80

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes. The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.

LEDLine Flex SMD Professional Indoor White – High Brightness

Built-in PCB lighting modules

The LEDLine Flex SMD Professional Indoor High Brightness is fitted with SMD LEDs on a flexible printed circuit board of only approx. 0.4 mm thickness. Even the most complex structures can be illuminated thanks to the use of an extremely pliable foil. LEDLine Flex SMD Professional Indoor High Brightness can be separated into segments of 80 mm lengths without loss of function.

This product is available in a continuous length of up to 3.2 m. Installation is achieved via double-sided adhesive tape affixed to the rear of the PCB.

Technical notes

Dimensions LEDLine Flex SMD Professional Indoor

LxW mm	LEDs pcs.	Single steps	Length mm	SMDs pcs.
3200x10	280	40	80	7

Allowed operating temperature at t_c point:
-20 to 65 °C

Wide beam angle: 120°

Voltage supply: 24 V



Power consumption per step (80 mm): 1.02 W

Typical applications

- Architectural lighting
- Illumination of complex structures
- Entertainment, shop design
- Marking paths, stairs, etc.
- Furniture lighting
- Light advertising

Type	Ref. No.	Colour	Correlated colour temperature K	Current A	Typ. luminous flux* lm	Beam angle* °	Max. power W	CRI R_a
WU-M-465-27K	554932	warm white	2700 -55/+90	1.7	3500	120	40.8	> 80
WU-M-465-30K	554933	warm white	3000 -50/+125	1.7	3600	120	40.8	> 80
WU-M-465-40K	554934	neutral white	4000 -165/+105	1.7	3800	120	40.8	> 80
WU-M-465-50K	554935	cool white	5000 -130/+150	1.7	3900	120	40.8	> 80
WU-M-465-65K	554936	cool white	6500 -265/+220	1.7	3900	120	40.8	> 80

* The values mentioned above represent only statistical variables on account of the complex manufacturing process of light emitting diodes. The values do not necessarily correspond exactly to the actual parameters of every single product which can vary from the typical specification.



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

AluLED IP64

AluLED IP64 is ideal for outdoor protected applications under humid conditions (excluding direct UV and water exposure) and the slim & flat design is extremely flexible for low profile lighting design mounting.

It is available in different CCTs and RGB to suit different application needs.

Technical notes

Voltage supply: 24 V DC

Beam angle: 120°

Allowed ambient temperature t_a : -30 to 85 °C

Allowed storage temperature: -40 to 85 °C

Degree of protection: IP64


Maximum bridging current load: 3 A

Lumen maintenance for white AluLED



$L70/B20 > 50,000$ hrs. at $t_p/t_c = 50$ °C



White

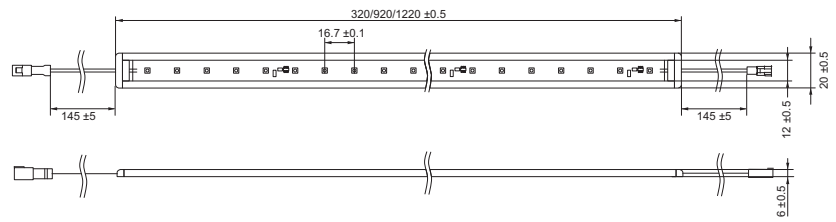

RGB

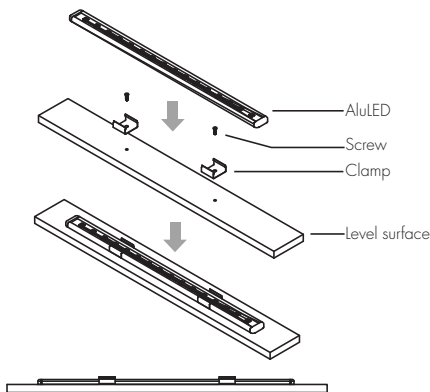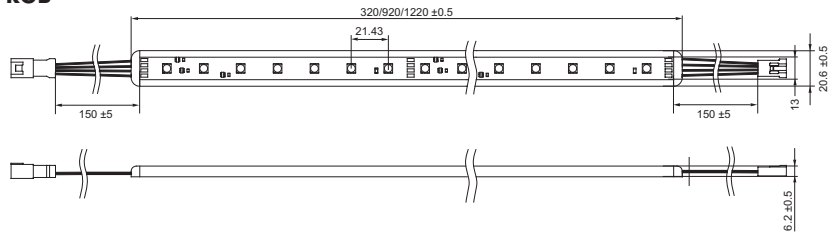

Optical characteristics

at $t_p = 50$ °C

White Modules										
Type	Ref. No.	Length mm	No. of LEDs	Current mA	Colour	Colour temperature (K)	Luminous flux lm	Beam angle °	Power W	Packaging unit pcs.
AluLED-320-3000-II Fully Coated	561698	320	18	140	warm white	3000 ±300	240	120	3.4	20
AluLED-920-3000-II Fully Coated	561699	920	54	420	warm white	3000 ±300	720	120	10.1	20
AluLED-1220-3000-II Fully Coated	561700	1220	72	560	warm white	3000 ±300	960	120	13.5	20
AluLED-320-6000-II Fully Coated	on request	320	18	140	cool white	6000 ±300	280	120	3.4	20
AluLED-920-6000-II Fully Coated	on request	920	54	420	cool white	6000 ±300	840	120	10.1	20
AluLED-1220-6000-II Fully Coated	on request	1220	72	560	cool white	6000 ±300	1120	120	13.5	20

RGB Modules													
Type	Ref. No.	Length mm	No. of LEDs	Current mA	Luminous flux (lm)			Dom. wavelength (nm)			Beam angle °	Power W	Packaging unit pcs.
					red	green	blue	red	green	blue			
AluLED-320-RGB	543320	320	14	120	18	40	9	620-630	520-535	465-475	120	2.8	20
AluLED-920-RGB	543321	920	42	360	54	120	28	620-630	520-535	465-475	120	8.6	20
AluLED-1220-RGB	543322	1220	56	480	72	160	36	620-630	520-535	465-475	120	11.5	20

Note: Further colours for AluLED are available upon request.

EasyConnect Cable for AluLED

Max. permissible current: 3 A

Number of strands: 2/4

(Strand diameter: 0.35 mm²/22 AWG)

For monochrome modules with 2 strands


Ref. No.: 543426 25 cm, feed-in connector

Ref. No.: 543427 50 cm, PCB to PCB connector

For RGB modules with 4 strands

Ref. No.: 543428 25 cm, feed-in connector

Ref. No.: 543429 50 cm, PCB to PCB connector



Shrink caps

For sealing exposed connection wires

(Strand diameter: 0.35 mm²/22 AWG)

Adhesive coating on the inside

Ref. No.: 543430 transparent

Ref. No.: 543431 black

Colour Control Modules – DigiLED CA

The DigiLED CA series is based on a system design that combines simplicity, flexibility and reliability. The DigiLED CA series is suitable for operating both high-power RGB CA modules and low-power RGB CA modules.

In the simplest case, a keypad enables manual colour control. In addition to custom colour control, it is also possible to call up pre-set colour programs for example colour sequences.

The CA series of VS colour control modules are available with both a manual operating pad and a DALI interface or "PUSH" or DMX variant.

Furthermore the DigiLED Mono is available. The DigiLED Mono enables the dimming of single-colour (e. g. white) LED modules.

All DigiLED not suitable for the US market.

Technical notes

Dimensions (LxWxH): 93 x 58 x 29 mm

Ambient temperature t_a : 0 to 45 °C

Operating voltage: 24 V

Max. current on the supply line: 5 A

Push-in terminals: 0.25-1.5 mm², grid: 3.5 mm

DigiLED Manual CA

Colour controls via key pads (6 keys)

Individual colour control or selection of


pre-set programs

$t_c = 55$ °C max.

Max. current per control channel: 1.25 A

Type: WU-ST-001-Digi-manuell-CA

Ref. No.: 186136



DigiLED Manual CA

DigiLED DALI CA


Digital colour controls via DALI light management

$t_c = 60$ °C max.

Max. current per control channel: 1.25 A

Type: WU-ST-004-Digi-DALI-CA

Ref. No.: 186138



DigiLED DALI CA

DigiLED DMX CA


Digital colour controls via DMX light management

$t_c = 60\text{ }^\circ\text{C max.}$

Max. current per control channel: 1.25 A

Type: WU-ST-003-Digi-DMX-CA

Ref. No.: 186153



DigiLED DMX CA

DigiLED IR CA

Colour adjustment by a portable remote control

Call up of pre-adjusted setting possible


Data transfer via infra-red

$t_c = 55\text{ }^\circ\text{C max.}$

Max. current per control channel: 1.25 A

Type: WU-ST-005-Digi-IR-CA

Ref. No.: 186154



DigiLED IR CA

DigiLED RF CA


Easy operation possible via radio frequency (RF) and a keypad with 7 buttons. The operation via radio frequency (RF) enables a flexible installation. Optical "line of sight" or cables are not necessary due to RF operation.

Ambient temperature t_a : $-20\text{ to }45\text{ }^\circ\text{C}$

Max. current per control channel: 1.25 A

Type: WU-ST-012-DigiLED-RF CA

Ref. No.: 186181



DigiLED RF CA

Walltransmitter


Required to activate the programs in the DigiLED RF

Dimensions (LxWxH): 86x86x15 mm

Colour: white

Type: WU-ST-009-Walltransmitter

Ref. No.: 536843



Walltransmitter

DigiLED Push CA

Colour adjustment by separate push button


Permits retrieval of pre-set programs

$t_c = 55\text{ }^\circ\text{C max.}$

Max. current per control channel: 1.25 A

Type: WU-ST-006-DigiLED-Push CA

Ref. No.: 186144

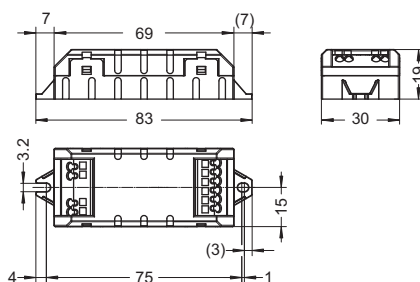

DigiLED Push CA

DigiLED Mono CA


For dimming of single-colour LED modules
Dimming via 1-10 V interface or external PWM signal

$t_c = 55\text{ }^\circ\text{C max.}$

Max. current per control channel: 5 A

Type: WU-ST-010-DigiLED-Mono CA

Ref. No.: 186155

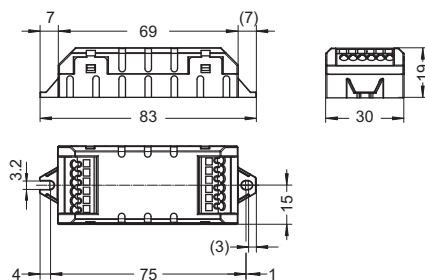

DigiLED Mono CA

DigiLED Slave CA

Increase of the system performance for 24 V CA LED built-in system


Signal amplification on channels RGB(W)

$t_c = 65\text{ }^\circ\text{C max.}$

Max. current per control channel per slave: 1.25 A

Type: WU-ST-002-DigiLED-Slave CA

Ref. No.: 186142

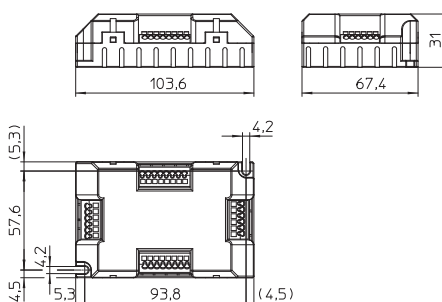

DigiLED Slave CA

Passive Slave CA


Increase of the system performance for 24 V CA LED built-in system

No signal amplification on channels RGB(W)

$t_c = 65\text{ }^\circ\text{C max.}$

Type: WU-ST-011-Passive-Slave CA

Ref. No.: 186172

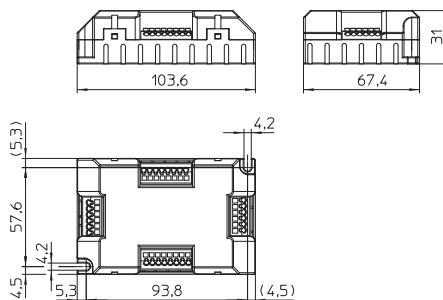

Passive Slave CA

Passive Slave PCB CA

PCB for increase of the system performance for 24 V CA LED built-in system


Without casing

No signal amplification on channels RGB(W)

$t_c = 65\text{ }^\circ\text{C max.}$

Type: WU-VB-004-Slave-PCB CA

Ref. No.: flatband cable



Passive Slave PCB CA

Table 1: Terminal connection

Pole	Colour coding	Function	Max. current-carrying capacity	Colour coding System flatband cable
1	red	supply line for LED built-in modules (+24 V)	5 A	blue
2	orange	PWM signal line for channel 1	1.25 A	grey
3	green	PWM signal line for channel 2	1.25 A	grey
4	blue	PWM signal line for channel 3	1.25 A	grey
5	light grey	PWM signal line for channel 4	1.25 A	grey
6	black	supply line for LED built-in modules (GND)	5 A	grey

ComfortLine LED Constant Voltage Drivers

24 V / max. 20 W

These flat LED constant-voltage drivers are designed for use in applications with small capacity range of up to 20 W.

Electronic characteristics

Power factor at full load: > 0.5

Connection details

Mains voltage: 220-240 V $\pm 10\%$

Mains frequency: 50-60 Hz

With connection lead on primary side

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV equivalent




Expected service life time

at operation temperatures at t_c point

	Ref. No. 186129	
t_c temperature	75 °C	65 °C
hrs.	50,000	100,000

K62 with cord grip

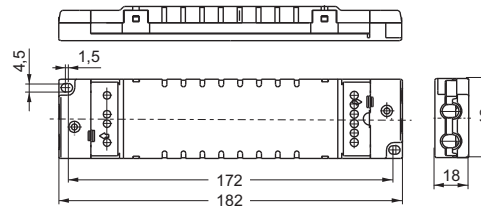

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V $\pm 10\%$	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	---	---------------------	---------------------	---------------------	---------------------------------	--------------------------------	-------------

K62 with cord grip – Dimensions: 182x42x18 mm

20	EDXe 120/24.009	186129	220-240	24 ± 0.5	230-210	0.0-0.85	- 20 to 45	75	155
----	-----------------	---------------	---------	--------------	---------	----------	------------	----	-----

ComfortLine LED Constant Voltage Drivers

**24 V / max. 50 W, max. 70 W
and max. 130 W**

These LED constant-voltage drivers are designed for use in applications with medium and high capacity range of up to 50 W, 70 W or 130 W.

Electronic characteristics

Power factor at full load: > 0.97

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz
(only EDXe 150)

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV




Expected service life time


at operation temperatures at t_c point

	Ref. No.			
	186103, 186104, 186218, 186219		186131, 186132	
t_c temperature	70 °C	60 °C	75 °C	65 °C
hrs.	50,000	100,000	50,000	100,000

K30 / K30.1

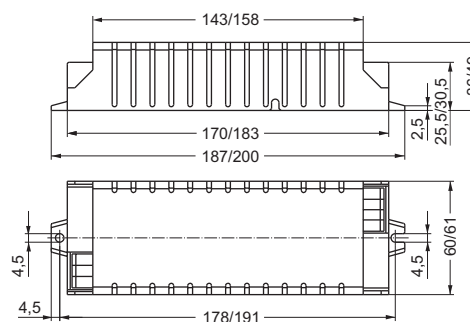

K30 / K30.1 with cord grip

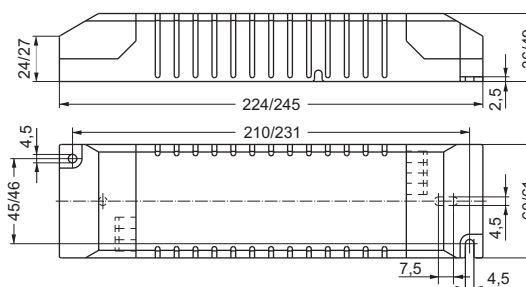

Max. output W	Type	Ref. No.	Mains voltage 0 Hz 50-60 Hz V ±10%	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K30 – Dimensions: 187x60x36 mm									
50	EDXe 150/24.035	186218	176-264 220-240	24 ±0.72	325-218 260-240	0.0-2.1	-40 to 45	70	320
K30.1 – Dimensions: 200x61x49 mm									
70	EDXe 170/24.010	186103	220-240	24 ±0.48	360-310	0.0-2.9	-20 to 45	70	340
130	EDXe 1130/24.014	186131	220-240	24 ±0.48	640-585	0.0-5.4	-20 to 45	75	370
K30 with cord grip – Dimensions: 224x60x36 mm									
50	EDXe 150/24.035	186219	176-264 220-240	24 ±0.72	325-218 260-240	0.0-2.1	-40 to 45	70	370
K30.1 with cord grip – Dimensions: 245x61x49 mm									
70	EDXe 170/24.010	186104	220-240	24 ±0.48	360-310	0.0-2.9	-20 to 45	70	360
130	EDXe 1130/24.015	186132	220-240	24 ±0.48	640-585	0.0-5.4	-20 to 45	75	390

ComfortLine LED Constant Voltage Drivers

24 V / max. 70 W and max. 130 W – IP67

These LED constant-voltage drivers are designed for use in IP67 applications with medium and high capacity range of up to 70 W or 130 W.

Electronic characteristics

Power factor at full load: > 0.97

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads

primary side: 5x1 mm², length: 200 mm

secondary side: 2x1 mm², length: 200 mm

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP67

Protection class I

SELV




Expected service life time

at operation temperatures at t_c point

	Ref. No.	
	186105, 186133	
t_c temperature	70 °C	60 °C
hrs.	50,000	100,000

K37 with cord grip

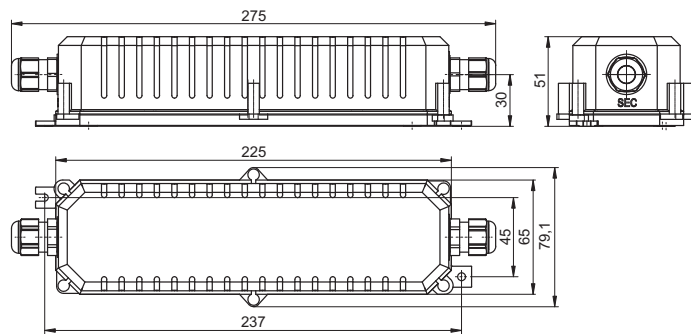

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V ±10%	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K37 with cord grip – Dimensions: 275 x 79.1 x 51 mm									
70	EDXe 170/24.010	186105	220-240	24 ±0.48	360-330	0.0-2.9	-20 to 45	70	515
130	EDXe 1130/24.016	186133	220-240	24 ±0.48	640-585	0.0-5.4	-20 to 45	70	545

EasyLine LED Constant Voltage Drivers

**24 V / max. 75 W, max. 100 W
and max. 150 W – IP67**

These LED constant-voltage drivers are designed for use in IP67 applications with high capacity range of up to 75 W, 100 W or 150 W.

Electronic characteristics

Power factor at full load: > 0.95

Connection details

Mains voltage: 220-240 V \pm 10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads:

K30.2: HO5RN-F

primary: 2x0.75 mm²

secondary: 2x1 mm²

M58.1:

primary: 2x2.08 mm²

secondary: 2x2.08 mm²

Safety features

Short-circuit protection: electronic

Overload protection

Protection against "no load" operation

Degree of protection: IP67

Protection class I

Protection class II (186432)

SELV




Expected service life time


at operation temperatures at t_c point

	Ref. No. all types	
t_c temperature	80 °C	70 °C
hrs.	30,000	50,000

K30.2

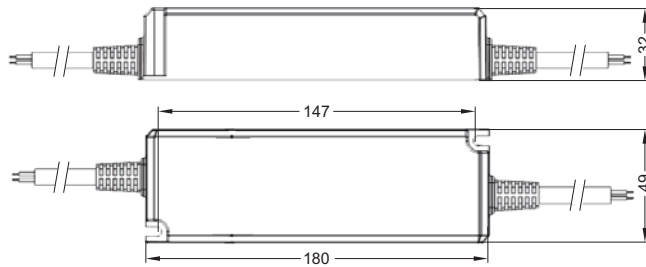

M58.1

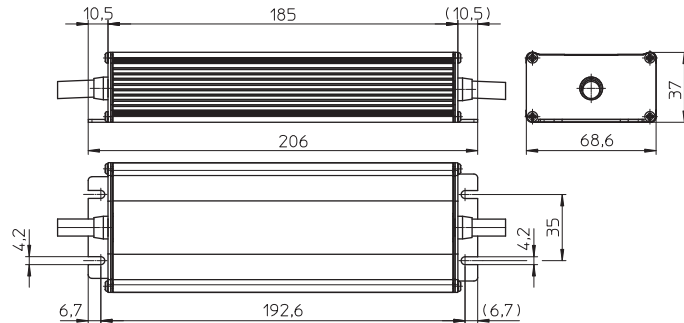

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V \pm 10%	Output voltage V	Mains current mA	Output current A	Ambient temperature t_a (°C)	Casing temperature t_c (°C)	Efficiency at full load % (230 V)	Weight g
K30.2 – Dimensions: 180x49x32 mm										
75	EDXe 175/24.040	186432	220-240	24 \pm 0.5	385-355	0.0-3.125	-15 to 45	80	89	440
M58.1 – Dimensions: 206x68.6x37 mm										
100	EDXe 1100/24.041	186433	220-240	24 \pm 0.5	505-465	0.0-4.2	-15 to 45	80	90	840
150	EDXe 1150/24.042	186434	220-240	24 \pm 0.5	760-700	0.0-6.25	-15 to 45	80	90	840

ComfortLine LED Constant Voltage Drivers

12 V / max. 12 W

The compact LED constant-voltage drivers are designed for use in applications with small capacity range of up to 12 W.

Electronic characteristics

Power factor at full load: > 0.57

Connection details

Mains voltage: 220-240 V $\pm 10\%$

Mains frequency: 50-60 Hz

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV-equivalent




Expected service life time

at operation temperatures at t_c point

	Ref. No. 186204	
t_c temperature	75 °C	65 °C
hrs.	50,000	100,000

K39.1



Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V $\pm 10\%$	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
---------------	------	----------	---	---------------------	---------------------	---------------------	---------------------------------	--------------------------------	-------------

K39.1 – Dimensions: 103.5 x 36 x 22 mm

12	EDXe 112/12.033	186204	220-240	12 ± 0.6	120	0.0-1.0	-20 to 50	75	60
----	-----------------	---------------	---------	--------------	-----	---------	-----------	----	----

EasyLine LED Constant Voltage Drivers

12 V / max. 6 W

This LED constant-voltage driver is designed for use in applications with capacity range of up to 6 W.

Electronic characteristics

Power factor at full load: > 0.5

Connection details

Mains voltage: 220-240 V \pm 10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads

primary: 2x0.75 mm², length: 180 mm

secondary: 2x0.5-0.75 mm², length: 180 mm

Safety features

Short-circuit protection: electronic


Overload protection

Protection against "no load" operation

Degree of protection: IP20

Protection class II

SELV

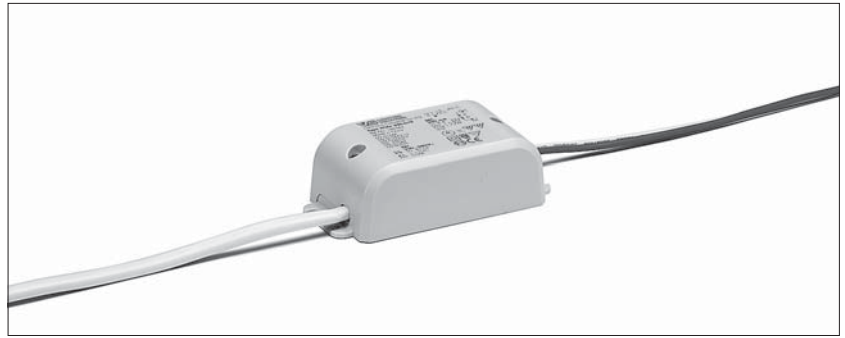


Expected service life time

at operation temperatures at t_c point

	Ref. No. 186412	
t_c temperature	80 °C	70 °C
hrs.	30,000	50,000

K51

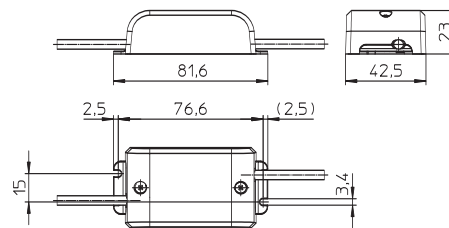

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V \pm 10%	Output voltage V	Mains current mA	Output current A	Ambient temperature t_a °C	Casing temperature t_c °C	Efficiency at full load % (230 V)	Weight g
---------------	------	----------	--	---------------------	---------------------	---------------------	---------------------------------	--------------------------------	--------------------------------------	-------------

K51 - Dimensions: 81.6x42.5x23 mm

6	EDXe 106/12.037	186412	220-240	12 \pm 0.5	70-60	0.0-0.5	-15 to 45	65	72	44
---	-----------------	---------------	---------	--------------	-------	---------	-----------	----	----	----

ComfortLine LED Constant Voltage Drivers

12 V / max. 50 W and max. 70 W

The compact LED constant-voltage drivers are designed for use in applications with medium capacity range of up to 50 W or 70 W.

Electronic characteristics

Power factor at full load: > 0.97

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

DC operation: 176-264 V DC, 0 Hz

(only EDXe 150)

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP20

Protection class I

SELV




Expected service life time


at operation temperatures at t_c point

	Ref. No. all types	
t_c temperature	70 °C	60 °C
hrs.	50,000	100,000

K30 / K30.1

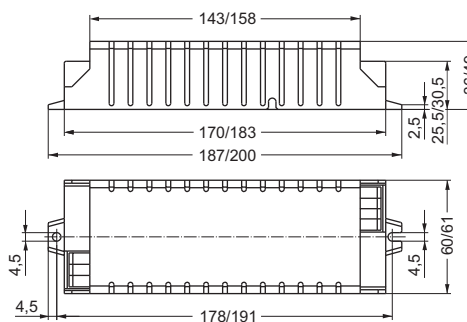

K30 / K30.1 with cord grip

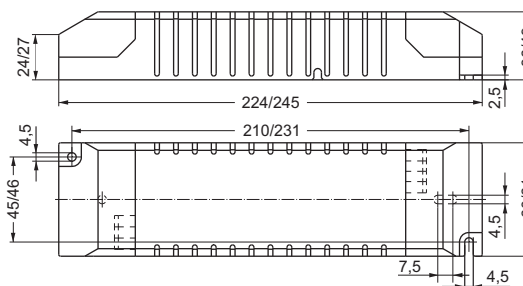

Max. output W	Type	Ref. No.	Mains voltage 0 Hz 50-60 Hz V ±10%	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K30 – Dimensions: 187x60x36 mm									
50	EDXe 150/12.034	186216	176-264	12.1 ± 0.24	325-218	0.0-4.2	-40 to 45	70	375
			220-240		260-240				
K30.1 – Dimensions: 200x61x49 mm									
70	EDXe 170/12.011	186112	220-240	12.1 ± 0.24	365-335	0.0-5.8	-20 to 45	70	340
K30 with cord grip – Dimensions: 224x60x36 mm									
50	EDXe 150/12.034	186217	176-264	12.1 ± 0.24	325-218	0.0-4.2	-40 to 45	70	425
			220-240		260-240				
K30.1 with cord grip – Dimensions: 245x61x49 mm									
70	EDXe 170/12.012	186113	220-240	12.1 ± 0.24	365-335	0.0-5.8	-20 to 45	70	360

ComfortLine LED Constant Voltage Drivers

12 V / max. 70 W – IP67

These LED constant-voltage drivers are designed for use in IP67 applications with medium capacity range of up to 70 W.

Electronic characteristics

Power factor at full load: > 0.97

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

Pre-assembled connection leads

primary side: 5x1 mm², length: 200 mm

secondary side: 2x1 mm², length: 200 mm

Safety features

Electronic short-circuit protection

Overload and temperature protection: reversible

Protection against "no load" operation

Degree of protection: IP67

Protection class I

SELV equivalent




Expected service life time

at operation temperatures at t_c point

	Ref. No. 186114	
t_c temperature	70 °C	60 °C
hrs.	50,000	100,000

K37 with cord grip

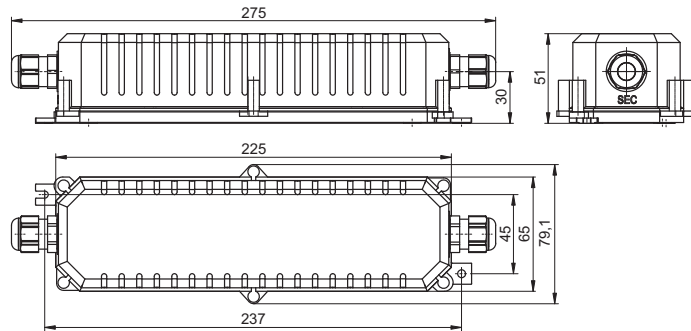

Max. output W	Type	Ref. No.	Mains voltage 50-60 Hz V ±10%	Output voltage V	Mains current mA	Current output A	Ambient temperature t_a °C	Casing temperature t_c °C	Weight g
K37 with cord grip – Dimensions: 275 x 79.1 x 51 mm									
70	EDXe 170/12.013	186114	220-240	12.1 ±0.24	365-335	0.0-5.8	-20 to 45	70	515

EMERGENCY LIGHTING DEVICES FOR LED APPLICATIONS



ELECTRONIC EMERGENCY LIGHTING DEVICES FOR LED APPLICATIONS

For nominal operating periods of 1 hour or 3 hours

Emergency lighting systems spring to life any time normal main lighting systems fail. Emergency lighting is designed to ensure that staff can safely leave any rooms and that there is sufficient lighting to illuminate rescue paths/routes as well as to avoid panic situations.

VS emergency lighting devices are designed for use with LED applications and can be operated as part of a combined system with electronic LED drivers.

VS emergency lighting devices test the presence of and the charge left on batteries during regular cycles and display the existing status via a bi-colour LED (self-testing function). This both simplifies battery maintenance and ensures necessary emergency lighting in the event of a mains power cut. During normal operation, the batteries are recharged with mains power.



Emergency Lighting Modules for 3 Hours Operating Time

50, 130 or 220 V voltage output

VS emergency lighting modules are suitable for LED luminaires.

Ambient temperature: 5 to 50 °C

Electrical characteristics

Power consumption: 4 VA

Constant output: > 3 W

Weekly automatic self-diagnosis and daily testing of system status

Battery charge is checked during regular testing cycles.

Optical status display via two-colour LED

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

LED emergency light devices must be connected in line with the installation manual.

Technical notes – Rechargeable batteries

Choice of rechargeable battery depends on the operating device.

Charging time of rechargeable batteries: max. 24 hrs.

Rechargeable batteries: nickel-cadmium (NiCd)

Safety features


Protection class I

Degree of protection: IP20


SELV [186498]




M5.1

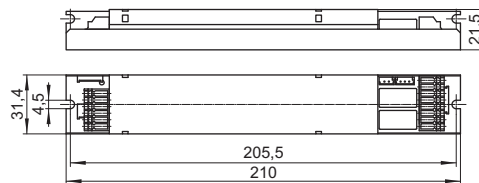

LED

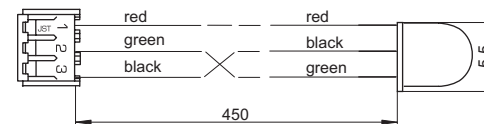

Rechargeable batteries

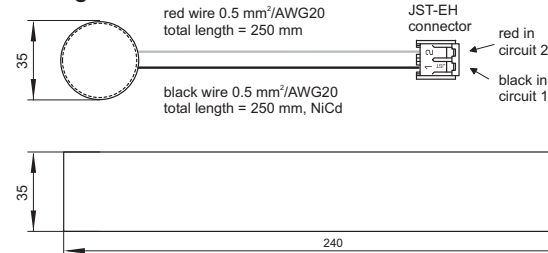

Type	Ref. No. EL Module	Ref. No. Battery	Battery type	Nominal operating period (hrs.)	Mains current at 230 V (mA)	Current output (mA)	Voltage output (V)	Weight (g) EL Module	Battery
M5.1 – Dimensions EL module: 210x31.4x21.5 mm									
EMCc 180.003	186498	188824	4.8V/4.5Ah	3	22	250-60	12-50	145	490
EMCc 180.004	186499	188824	4.8V/4.5Ah	3	22	150-23	20-130	145	490
EMCc 180.005	186500	188824	4.8V/4.5Ah	3	22	100-13	30-220	145	490


Holders for rechargeable batteries for emergency LED lighting modules

It is recommended to use two holders per rechargeable battery to ensure optimum hold.

Material: PBT

For rechargeable battery type: 4.8V/4.5Ah NiCd

Ref. No.: 188828



Emergency Lighting Modules for 1 Hour Operating Time

50, 130 or 220 V voltage output

VS emergency lighting modules are suitable for LED luminaires.

Ambient temperature: 5 to 50 °C

Electrical characteristics

Power consumption: 3.5 VA

Constant output: > 3 W

Weekly automatic self-diagnosis and daily testing of system status

Battery charge is checked during regular testing cycles.

Optical status display via two-colour LED

Connection details

Mains voltage: 220-240 V ±10%

Mains frequency: 50-60 Hz

LED emergency light devices must be connected in line with the installation manual.

Technical notes – Rechargeable batteries

Choice of rechargeable battery depends on the operating device.

Charging time of rechargeable batteries: max. 24 hrs.


Rechargeable batteries: nickel-cadmium (NiCd)

Safety features


Protection class I

Degree of protection: IP20


SELV [186495]

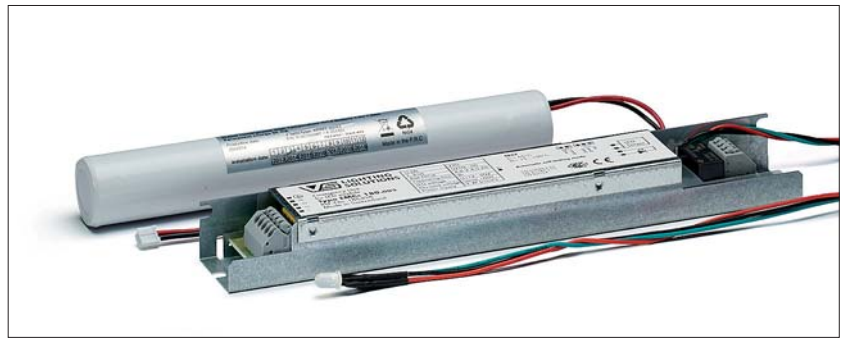


M5.1

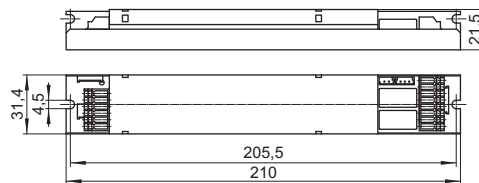

LED

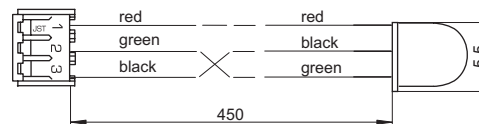

Rechargeable batteries

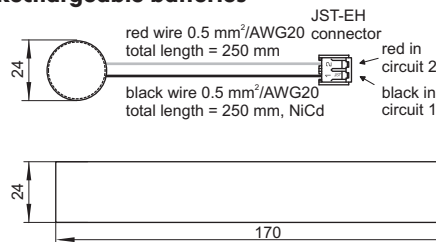

Type	Ref. No. EL Module	Ref. No. Battery	Battery type	Nominal operating period (hrs.)	Mains current at 230 V (mA)	Current output (mA)	Voltage output (V)	Weight (g)	
								EL Module	Battery
M5.1 – Dimensions EL module: 210x31.4x21.5 mm									
EMCc 60.000	186495	188823	4.8V/1.8Ah	1	16	250-60	12-50	145	200
EMCc 60.001	186496	188823	4.8V/1.8Ah	1	16	150-23	20-130	145	200
EMCc 60.002	186497	188823	4.8V/1.8Ah	1	16	100-13	30-220	145	200


Holders for rechargeable batteries for emergency LED lighting modules

It is recommended to use two holders per rechargeable battery to ensure optimum hold.

Material: PC

For rechargeable battery type: 4.8V/1.8Ah NiCd

Ref. No.: 188827



LED LAMPS

MR16, AR111, GU10



LED - THE GREEN FUTURE LIGHTING

LEDs contain no mercury and are low on energy consumption, as a result of which they lead the field when it comes to "green lighting". Thanks to their eco-friendly properties, they can make a valid contribution to reducing your carbon footprint and countering the greenhouse effect. Moreover, LEDs start instantaneously at full brightness and are available in many colours.

In addition to providing UV- and IR-free light, LEDs are vibration-proof and have a very long service life that further increases the overall efficiency of any lighting system. As LED lamps are now powerful enough to replace both incandescent and low-voltage halogen lamps, they are becoming increasingly popular beyond the field of decorative lighting.




Low-voltage LED Lamps

Suitable for magnetic halogen transformers, electronic halogen converters (12 V AC) and electronic LED drivers (12 V DC)


MR16 – 5.5 W

Design style: COB lens
 Operating temperature: 0 to 40 °C
 Storage temperature: -20 to 60 °C
 Input voltage: 12 V AC/DC
 Non dimmable
 Base: GU5.3



MR16 – 7 W

Design style: COB reflector
 Operating temperature: 0 to 40 °C
 Storage temperature: -20 to 60 °C
 Input voltage: 12 V AC/DC
 Dimmable (Magnetic with leading-edge dimmers/
 Electronic preferred with trailing-edge dimmers)
 Base: GU5.3




Type	Ref. No.	Colour	Colour temperature K	Typ. luminous flux (lm)	Light intensity cd	Beam angle (°)	Field angle (°)	CRI R _a	Power factor	Power W	Energy efficiency
MR16 – 5.5 W											
MR16-5-3000-24-III	553212	warm white	3000	350	1300	24	48	≥ 80	0.7	5.5	A
MR16-5-3000-36-III	553213	warm white	3000	350	700	36	72	≥ 80	0.7	5.5	A+
MR16 – 7 W											
MR16-7-3000-24-III	553214	warm white	3000	500	1280	24	48	≥ 80	0.9	7	A
MR16-7-3000-36-III	553215	warm white	3000	500	1000	36	72	≥ 80	0.9	7	A

Note: Further colour temperatures are available on request.

Typical luminance of MR16 at 1, 2 and 3 meters

Intensity (lux)	MR16 – 5.5 W						MR16 – 7 W					
	24°			36°			24°			36°		
	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m
Warm White 3000 K	1300	325	140	700	175	80	1280	320	150	1000	250	110

Typical light distribution curves

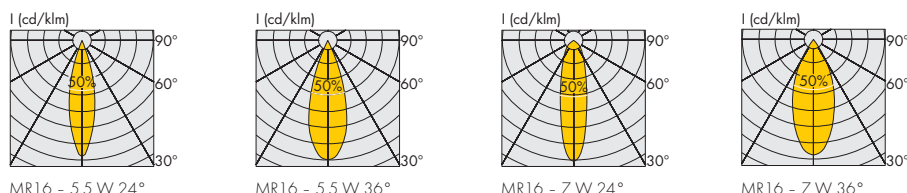

LED Lamps

Replacement for low-voltage incandescent lamps



Suitable for 12 V AC magnetic transformers,
12 V DC electronic drivers and
12 V AC electronic converters

AR111 – 16 W

Operating temperature: -20 to 40 °C
Storage temperature: -40 to 60 °C
Input voltage: 12 V AC/DC
Not dimmable
Base: G53

AR111 – 13 W

Operating temperature: -20 to 40 °C
Storage temperature: -40 to 60 °C
Input voltage: 12 V AC/DC
Phase-cut dimmable (trailing-edge dimmers are preferred)
Base: G53

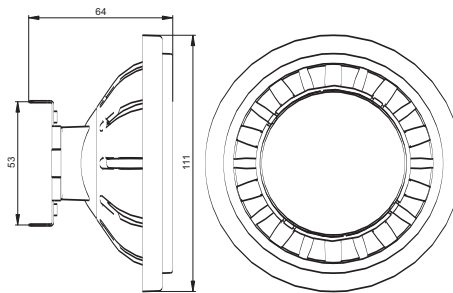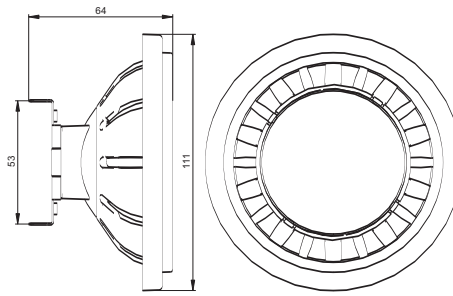


Type	Ref. No.	Colour	Colour temperature K	Typ. luminous flux (lm)	Light intensity cd	Beam angle °	Field angle °	CRI R _a	Power factor	Power W	Energy efficiency
AR111 – 16 W											
AR111-16-3000-24-III	556794	warm white	3000	1000	3200	24	48	≥ 80	> 0.9	16	A
AR111-16-3000-36-III	556795	warm white	3000	1000	1600	36	72	≥ 80	> 0.9	16	A
AR111 – 13 W											
AR111-13-3000-24-III	556796	warm white	3000	800	2600	24	48	≥ 80	> 0.9	13	A
AR111-13-3000-36-III	556797	warm white	3000	800	1400	36	72	≥ 80	> 0.9	13	A

Further colour temperatures are available on request.

Typical luminance of AR111 at 1, 2 and 3 meters

Intensity (lux)	AR111 – 16 W						AR111 – 13 W					
	24°			36°			24°			36°		
	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m
Warm White 3000 K	3200	800	360	1600	400	180	2600	650	290	1400	350	160

Typical light distribution curves

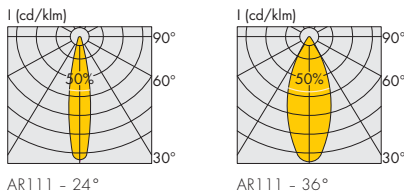

AR111 – 24°

AR111 – 36°

Electronic Converters for LED Lamps 12 V

You will find LED converters for the LED lamps MR16 and AR111 on page 210–213.

Important Notice for LED Lamps

For replacement of low-voltage halogen incandescent lamps

- Do not connect more than one unit to one transformer
- Do not use in ambient temperatures of more than 40 °C
- Unsuitable for installation in enclosed or airtight luminaires
- For indoor use only
- Unsuitable for use outdoors or in high-moisture environments

For replacement of mains voltage incandescent lamps

- Unsuitable for operation with an additional driver
- Integrated high-frequency driver
- Do not use in ambient temperatures of more than 40 °C
- Unsuitable for installation in enclosed or airtight luminaires
- For indoor use only
- Unsuitable for use outdoors or in high-moisture environments
- Dimmable with phase-cutting dimmers (designated lamps only); minimum dimmer load has to be respected.
The compatibility of the lamp to the dimmer has to be confirmed prior to installation to avoid flickering and/or noises.
Trailing-edge dimmers are preferred.


Caution: Always disconnect equipment from the mains before replacing lamps!

LED Lamps

With integrated driver for replacement of high-voltage halogen incandescent lamps

GU10 – 4 W

Design style: SMD reflector
 Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Non dimmable
 Base: GU10




1

2

GU10 – 4.5 W and 6 W

Design style: SMD reflector
 Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Phase-cut dimmable (trailing-edge dimmers are preferred)
 Base: GU10




3

4

GU10 – 5.5 W

Design style: COB lens
 Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Non dimmable
 Base: GU10




5

6

7

GU10 – 7 W

Design style: COB reflector
 Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Phase-cut dimmable (trailing-edge dimmers are preferred)
 Base: GU10




8

9

GU10 – 7 W

Design style: SMD lens
 Operating temperature: 0 to 35 °C
 Storage temperature: -20 to 85 °C
 Input voltage: 220-240 V AC
 Non dimmable
 Base: GU10



10

11

12

LED Lamps

With integrated driver for replacement of high-voltage halogen incandescent lamps


Type	Ref. No.	Colour	Colour temperature K	Typ. luminous flux (lm)	Light intensity cd	Beam angle °	Field angle °	CRI R _a	Power factor	Power W	Energy efficiency
4 W – SMD reflector											
GU10-4-3000-36-R	556798	warm white	3000	290	550	36	72	≥ 80	0.4	4	A+
4.5 W – SMD reflector											
GU10-4.5-2700-36-R	554601	warm white	2700	230	520	36	72	≥ 80	0.4	4.5	A+
5.5 W – COB lens											
GU10-5-3000-24-III	553218	warm white	3000	350	1300	24	48	≥ 80	0.5	5.5	A+
GU10-5-3000-36-III	553219	warm white	3000	350	700	36	72	≥ 80	0.5	5.5	A+
6 W – SMD reflector											
GU10-6-3000-36-R	556799	warm white	3000	380	680	36	72	≥ 80	0.6	6	A+
7 W – COB reflector											
GU10-7-3000-24-III	553220	warm white	3000	450	1000	24	48	≥ 80	0.9	7	A+
GU10-7-3000-36-III	553221	warm white	3000	450	800	36	72	≥ 80	0.9	7	A+
7 W – SMD lens											
GU10-7-2700-36-R	550086	warm white	2700	460	1250	36	72	≥ 80	0.5	7	A+
GU10-7-5000-36-R	550087	cool white	5000	520	1500	36	72	≥ 80	0.5	7	A+

Further colour temperatures are available on request.

Typical luminance of GU10 at 1, 2 and 3 meters

Intensity (lux)	Typical luminance of GU10 at 1, 2 and 3 meters																				
	GU10 – 4 W			GU10 – 4.5 W			GU10 – 5.5 W			GU10 – 6 W			GU10 – 7 W								
	36°	36°	36°	36°	36°	36°	24°	36°	36°	36°	36°	36°	24°	36°	36°	36°	36°	36°			
Colour temperature K	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m
Warm white 2700 K	–	–	–	520	130	60	–	–	–	–	–	–	–	–	–	–	–	–	1250	313	139
Warm white 3000 K	550	140	60	–	–	–	1300	325	140	700	175	80	680	170	80	1000	250	120	–	–	–
Cool white 5000 K	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	1500	375	167

Typical light distribution curves

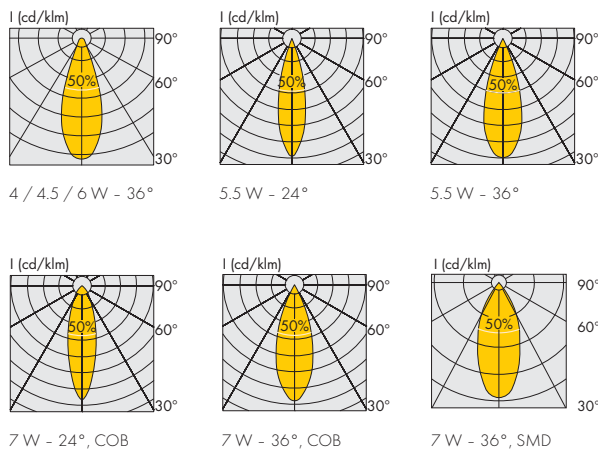

General information on LED technology

Thanks to the constant developmental progress made in LED semiconductor technology, the fields of application for LEDs are growing continuously. Mood and architectural lighting, for instance, are already benefiting from the saturated colours of and possibilities afforded by RGB colour control. Ever higher light efficiency levels at higher currents are making white LEDs increasingly attractive for general lighting. Among others, further decisive advantages are great longevity, low energy consumption, neither UV or IR beam nor any hazardous substances.

The key basis of modern optoelectronics is the availability of high-performance LEDs in the three primary colours red, green and blue as well as white and warm white. By assembling these on circuit boards and in combination with converters and control systems, lighting systems can be created for the most diverse areas of use.

Vossloh-Schwabe's production of LED modules is based on tried-and-tested COB and SMD technology. This makes it possible to design modules in various dimensions and performance classes. COB (Chip On Board) technology enables super-flat designs with very high chip densities. SMD (Surface Mounted Device Technology) enables convenient, quick and simultaneous assembly of LED and electronics devices.

Working principle of light emitting diodes (LEDs)

An LED semiconductor chip is a semiconductor component that is made up of two differently doped crystal-layers, one of which positive (p) and the other negative (n). Light is emitted at the depletion-layer pn boundary for a current flow in forward direction.

An LED converts applied electric energy into visible electromagnetic radiation. The construction and doping of a semiconductor depends on the desired wavelength λ (colour), which can only be monochromatic (red, orange, yellow, green or blue). Colour blends are created by varying the number of LEDs in the individual colours. By adding certain converter materials, LEDs can also produce white and warm white light. This type of light generation using a semiconductor is generally referred to as luminescence, i.e. the generation of cold light whose rays contain no warmth and are emitted without infrared (IR).


Semiconductor materials for LED chips

Irrespective of the specific model, an LED always consists of the following components: leadframe, LED chip and contacting using conductive adhesive and bonding.

While the leadframe can be made of a PCB or ceramics, plastics and other materials, the LED chips are mounted on a die-cut reflector (cathode) using conductive adhesive to achieve higher light intensities with a focused beam of light. The anode is connected using bonding wire.

The optical viewing angle (φ) of an LED is determined by the geometry of the casing including reflector and the position of the chip within the casing.

Small in size and highly resistant against mechanical impact/stress, LEDs are an ideal component for lighting applications. Special modular solutions are also available for applications involving differing ambient conditions (humidity, ambient temperature, etc.).

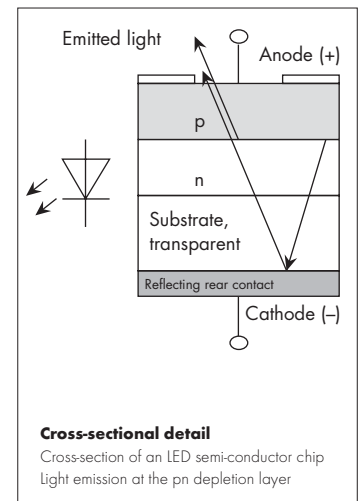

1

2

3

4

5

6

7

8

9


10

11

12

Visible light within the electromagnetic spectrum

Visible light only accounts for a small part of the electromagnetic spectrum. The part of the electromagnetic spectrum that is visible for humans ranges from ultraviolet ($\lambda = 380 \text{ nm}$) to dark red ($\lambda = 780 \text{ nm}$).

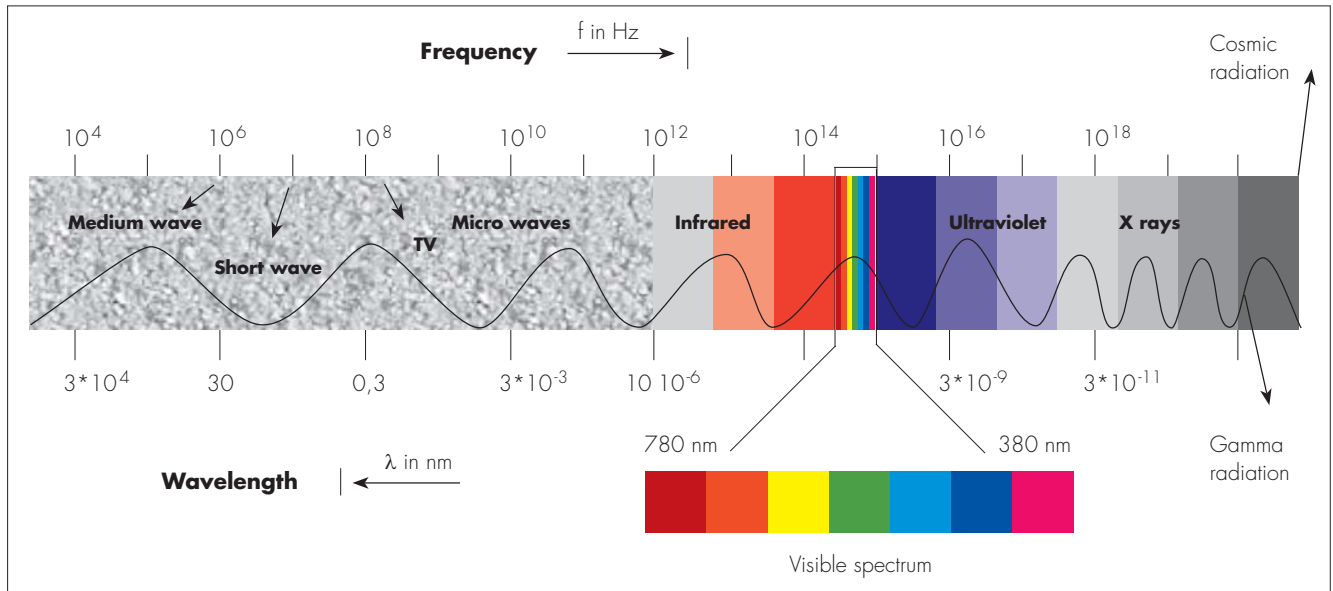

Light sensitivity of the human eye


By day, the maximum light sensitivity (K_m) of the human eye for green is at $\lambda = 555 \text{ nm}$ and drops to $\lambda = 510 \text{ nm}$ by night. Light sensitivity falls off sharply for both higher and lower wavelengths and only totals 1% of day vision for blue at $\lambda = 430 \text{ nm}$ and dark red at $\lambda = 720 \text{ nm}$. Thus, in order for the human eye to perceive light of these wavelengths at the same intensity as yellow-green light, its luminance L_V needs to be 100 times greater.

Service life of LEDs

The service life of an LED is determined by various factors:

- the degradation rate of the semiconductor material and the encapsulation material
- the applied operating current I_F
- the ambient temperature t_a during operation and
- the thermal resistance

The term degradation describes the decrease in brightness of an LED chip as a result of the applied forward current during normal operation. Given normal operating conditions ($t_a = 25^\circ\text{C}$ at $I_F = 10\text{-}30 \text{ mA}$), LEDs will provide a service life of up to 100,000 operating hours (typically 50,000 hours for High Power applications), after which time the brightness of the LED will have dropped typically to 70% of its original value.

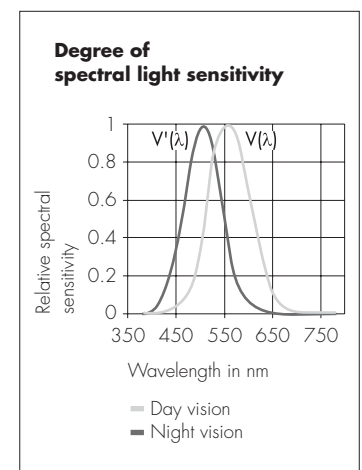


LED efficiency

In theory, the internal efficiency of an LED chip is 90%, meaning that 90% of the applied electrical energy is converted into visible light at the pn junction layer.

However, a part of the light emitted at the pn junction layer cannot pass through the semiconductor structure and it remains a major technological challenge to optimise the coupling of light out of the chip with the help of innovative designs. These processes determine the external degree of LED efficiency, which denotes the magnitude of visible output that can pass through the semiconductor structure when, for instance, 1 W of electrical power is applied to an LED.

Colour design with LEDs

CIE Chromaticity Chart (CIE 1931 according to DIN 5033)

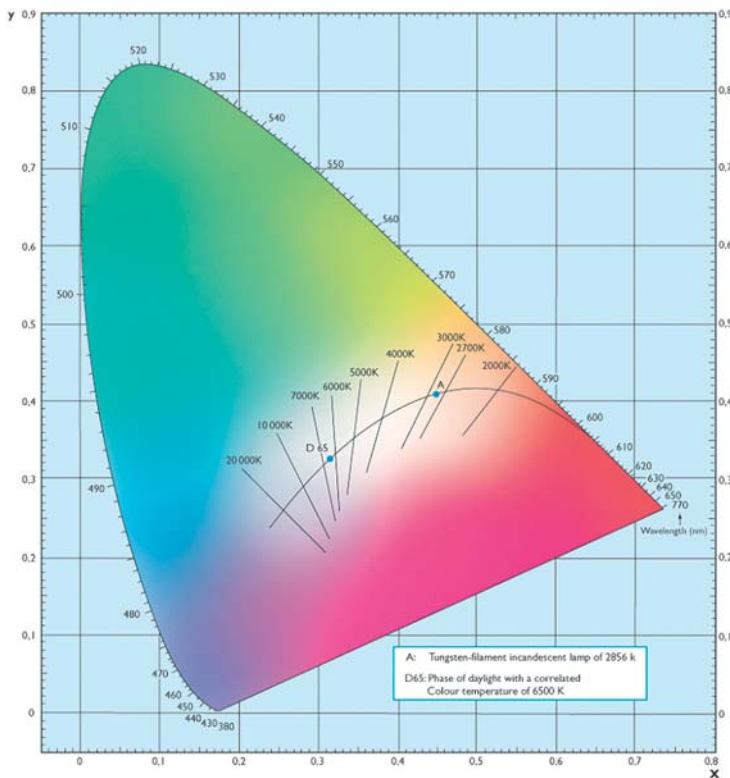

The CIE chromaticity triangle (standardised CIE 1931 chromaticity chart according to DIN 5033) makes it possible to precisely plot the colours of light sources and objects using two standardised (and previously gauged) chromaticity coordinates, the x and y values. Every point in this chart represents the chromaticity location of a certain chroma. Colours of the same chromaticity only differ from each other in terms of their intensity (colour saturation). The so-called "no-colour point" (white, grey and black, depending on brightness) is situated in the middle of the chart at $x = 0.33$ and $y = 0.33$.

The boundary of the chromaticity chart is made up of the gamut of spectral colours from 380 nm (blue-violet) to 780 nm (dark red) and the so-called purple boundary. As a result of additive mixing of two or more coloured light sources the chromaticity coordinates are always along a direct line between the starting coordinates.

1

2

3

4

5

6

7

8

9

10

11

12

When using LED lighting, different colours can be created using additive colour mixing (RGB) or by transforming the wavelengths a diode emits by adding a luminescent material in a manner similar to fluorescent lamps. In the case of additive colour mixing/control, appropriate control devices are used to adjust the brightness of the individual LED colours (RGB) to create the desired light colour.

LED system components

- LED modules
- LED optics
- LED operating devices
- LED control modules
- LED connection technology

When selecting LED components, it is important to take account of their technical specifications, especially with regard to voltage range, current and temperature. VS provides a large range of components for the various areas that all go to build a perfectly matched system. The technical specifications of the various components can be found on the product pages.

Assembly Instructions for LEDs

For mounting and installing LED components

Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 60838-2-2	Miscellaneous lampholders – part 2-2: particular requirements – connectors for LED-modules
EN 61347-1	Lamp controlgear – part 1: general and safety requirements
EN 61347-2-11	Controlgear – part 2-11: particular requirements for miscellaneous electronic circuits used with luminaires
EN 61347-2-13	Lamp controlgear – part 2-13: particular requirements for DC or AC supplied electronic controlgear for LED modules
EN 62031	LED modules for general lighting – safety specifications
EN 62384	DC or AC supplied control gear for LED modules – performance requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61000-3-2	Electromagnetic compatibility (EMC) – part 3-2: limits – limits for harmonic current emissions (equipment input current = 16 A per phase)
EN 61000-3-3	Electromagnetic compatibility (EMC) – part 3-3: limits – limitation of voltage fluctuations and flicker (equipment input current = 16 A per phase)
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 62471	Photobiological safety of lamps and lamp systems

Mechanical mounting of LED operating devices

Surface	Solid, flat surface for good heat discharge required. Avoid mounting protruding surfaces.
Mounting location	Converters must be protected against moisture and heat.
Installation in external luminaires	Luminaire requires water protection rate of = 4 (e.g. IP54 required).
Heat transfer	If the converter is destined for installation in a luminaire, sufficient heat transfer must be ensured between the converter and the luminaire casing. Converters should be mounted with the greatest possible clearance to sources of heat. During operation, the temperature measured at the t_c point of the converter must not exceed the specified maximum value.

Additional mounting instructions for independent LED operating devices

Mounting position	Any
Clearance	Min. of 0.10 m from walls, ceilings, insulation Min. of 0.10 m from other electronic ballasts Min. of 0.25 m from sources of heat (LEDs or other lamps)
Surface	Solid; device must not be allowed to sink into insulation materials

Safety, assembly and handling information for LED modules

Installation and maintenance must always be performed by a qualified fitter in accordance with relevant legislation. The following instructions must be strictly observed. Vossloh-Schwabe Deutschland GmbH accepts no liability for any possible inaccuracies during installation, any non-compliance with these instructions or for any possible omissions in this publication.

In addition, Vossloh-Schwabe Deutschland GmbH reserves the right to make modifications at any time and without prior notification. This data sheet is an integral part of the equipment and its safety devices and should therefore be kept in a safe place for easy reference. The equipment must always be disconnected from the mains prior to undertaking any maintenance work. The safety instructions on the type plate of the components must be strictly observed.

Installation must be conducted at zero potential after disconnection from the line. Modules can have sharp edges or corners. Please take special care during installation to avoid injury. The modules can get hot. Please provide warning notices at the luminaire body if necessary.

LED modules and all PCB components must not be subjected to undue mechanical stress:

- LED modules must not be handled as bulk cargo.
- Shear and pressure stress must be avoided on SMD LEDs and the grouting material of COB LEDs during assembly and handling.

The circuit path must not be damaged or interrupted. We recommend using clips or plastic screws for installation purposes to avoid short circuits and damage to the modules.

The LED modules are not protected against short-circuiting, overloading or overheating. The use of Vossloh-Schwabe electronic power supply units is therefore absolutely essential. Using other power supply units is not recommended. Please ensure you choose the correct electronic power supply unit for the module in question and that the respective output parameters (current, voltage, wattage) are correct (see www.vossloh-schwabe.com).

1

2

3

4

5

6

7

8

9

10

11

12

Safe operation is only possible by the use of external constant-current sources.

Power supply units must be used for operation, in which the following protective measures are ensured:

- Short-circuit protection
- Overload protection
- Overheating protection
- SELV (Safety Extra Low Voltage)

Please ensure standard ESD (electrostatic discharge) protection measures are employed when handling and installing LED modules. Electrostatic discharge can damage LEDs.

Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.

The maximum output of the power supply must be observed.

For optimal load of used constant-current driver the LEDSpots can only be connected in series. The quantity of LEDSpots is limited by the sum of forward voltage and the capacity of used constant-current driver.

A parallel connection of the modules is not allowed.

The modules are not protected against dust or moisture (except LEDLine Flex SMD Professional Outdoor, LEDSpots IP54, Roadway Light and Industrial Light IP66/IP67). When LED modules are operated in unduly moist or dusty environments, care must be taken to ensure each module is built into a protective casing in compliance with the correct IP classification or provided with corrosion protection. Damage caused by moisture and/or corrosion will not be recognised as a material or manufacturing defect.

To ensure smooth module operation, care must be taken that module temperatures at the t_c point never exceed the maximum values stipulated in the data on catalogue pages.

Due to the numerous installation options and differing operating conditions, no precise installation guidelines can be provided that will ensure the maximum temperature values are never exceeded. In principle, the LED modules can be mounted on a flat metal surface (heat sink) that must, however, provide a large enough surface area to ensure the generated heat can be dissipated to the surroundings.

Under no circumstances may LED modules ever be covered by insulation material or similar. Air ventilation must be ensured.

Please ensure adhesive pads or other products with adhesive areas (LEDLine Flex SMD Professional, LEDLine Flex SMD Professional Outdoor) are only used on dry and clean surfaces that are free of grease, oil, silicone and dirt particles. Owing to the varying application options and different types of surface as well as ambient conditions, VS accepts no liability for the quality of the adhesive bond achieved when mounting these products.

Tests have shown the following chemicals to be harmful to LEDs used on the modules. It is recommended not to use the under-mentioned chemicals anywhere in an LED system. The fumes from even small amounts of these chemicals may damage the LEDs.

- Chemicals that might outgas aromatic hydrocarbons (e.g., toluene, benzene, xylene)
- Methyl acetate or ethyl acetate (i.e., nail polish remover)
- Cyanoacrylates (i.e., "Superglue")
- Glycol ethers
(including Radio Shack®, Precision Electronics Cleaner - dipropylene glycol monomethyl ether)
- Formaldehyde or butadiene (including Ashland PLIOBOND® adhesive)
- Dymax 984-LVUF conformal coating
- Loctite Sumo glue
- Gorilla glue
- Clorox bleach
- Clorox Clean-Up cleaner spray
- Loctite 384 adhesive
- Loctite 7387 activator
- Loctite 242 threadlocker

Safety, assembly and handling information for ReadyLine modules

The ReadyLine LED modules are designed for direct mains operation (230 V AC). Installation must be carried out under observation country specific relevant safety regulations and standards.

The LED module is a built-in lighting module to assemble into luminaires. Clearance and creepage distances of the LED module are designed for class II luminaires.

Additional insulating material could be required in order to reach the sufficient isolation acc. country specific standards (e.g. EN 60598 and EN61547 Tab. 10 for Europe).

1

2

3

4

5

6

7

8

9

10

11

12

DALI LIGHT CONTROL GEAR AND ACCESSORIES



INTELLIGENT INDOOR LIGHTING

With its new XSW Wireless Light Controllers, Vossloh-Schwabe has opened up a new chapter in light control. The Wireless Light Controller offers users particularly easy and flexible integration of light control options into a system or luminaire – with a special emphasis on simple, intuitive operation.

The VS Light Controllers are light management systems that were developed as a convenient means of controlling and regulating light.

Communication between the Light Controller and the luminaire is achieved using the standard DALI protocol. The Light Controllers comply with the IEC 62386:2008 DALI standard. The Light Controllers of the LiCS System Network series automatically interconnect to form a centrally controllable TCP/IP network.

The entire lighting system was designed to permit easily comprehensible configuration. Any later modifications to the system can thus be carried out without any problems.

Light Controllers provide users with a convenient means of integrating numerous control options, from controlling individual luminaires via a smartphone right up to a light management system.

Typical applications

- Offices, industrial spaces and warehouses
- Shops, supermarkets and malls
- Hotels and gastronomy
- Public buildings (e.g. museums, schools and hospitals)
- Stairwells and hallways
- Sanitary facilities






Light Controller IP/DALI and LightBox







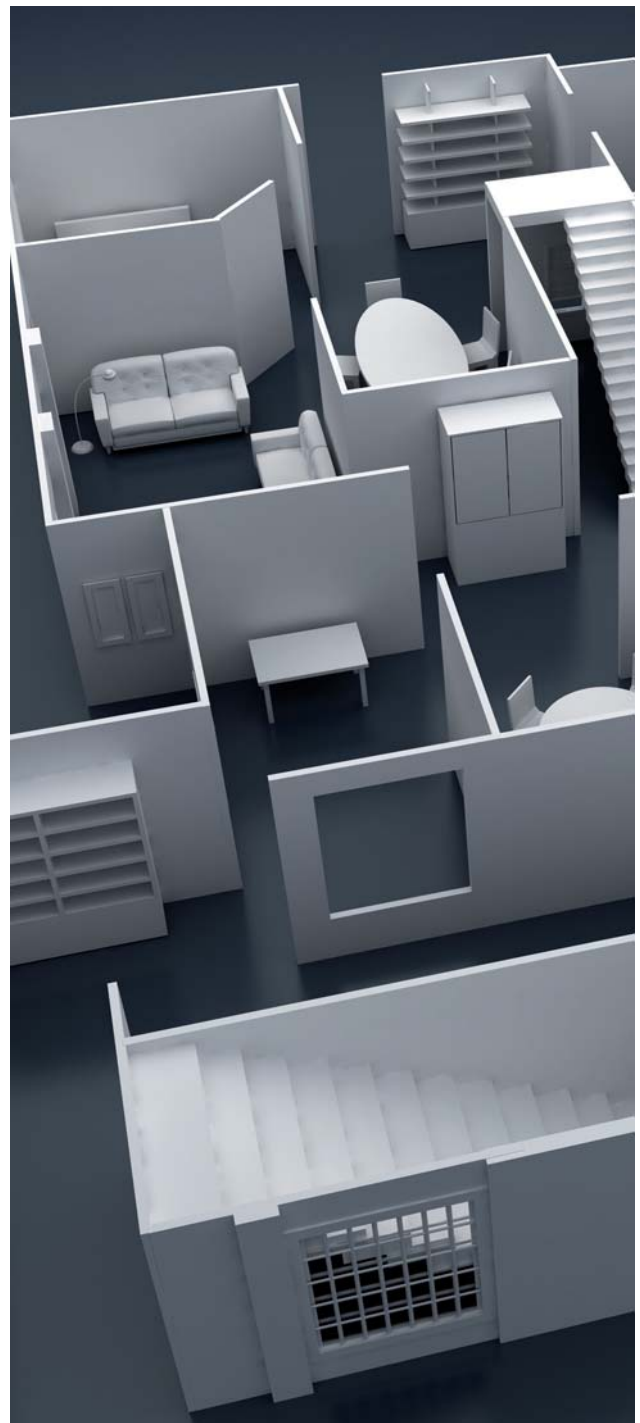


Light Controller XSW-E6 and XSW-E64

System overviews	232–234
Light Controller IP/DALI, LightBox and DALI Push-button Interface	235–236
Light Controller XSW-E6 and XSW-E64	237–238
Light Controller L / LS and LW / LSW	239
Antennas	240
Light Controller S / XS	241–242
Extender / Extender Flex	243
MultiSensors	244
Industry Sensors High Bay	245
Technical details	246–259
Light Controller IP/DALI	246–247
Light Controller L / LS and LW / LSW	248–249
Light Controller S / XS	250–253
Circuit diagrams Light Controller XSW	252
Extender	253–254
MultiSensors	254–255
Industry Sensors High Bay	256–259






- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Overview of the LiCS Indoor System

Product matrix	Light Controller L / LS	Light Controller LW / LSW	Light Controller S	Light Controller XS
	 for integration into the distribution board	 for integration into the distribution board - EnOcean wireless version	 for independent operation	 for built-in into luminaires
MultiSensors	 MultiSensors (movement and brightness)			
High Bay Sensors	 High Bay Sensors (movement) or brightness (constant light control)			
Extender				
Input devices	max. 6 buttons (mains voltage-compatible)	antenna (magnetic-base or screw-base); max. 6 buttons (mains voltage-compatible); EnOcean wireless modules (max. 16 pcs.)	button (mains voltage-compatible)	button (mains voltage-compatible)

Functions	Light Controller		Light Controller		Light Controller	Light Controller
	L	LS	LW	LSW	S	XS
Control options	single and group	group	single and group	group	broadcast	broadcast
No. of groups	max. 16		max. 16		–	–
No. of operating devices (DALI-EBs, LiCS-Extender, HB sensors)	max. 64		max. 64		max. 64	max. 10
No. of MultiSensors	max. 36		max. 36		max. 36	max. 4
Motion detection (automatic and semi-automatic)		●		●	●	●
Constant light control		●		●	●	●
Scene settings	●	–	●	–	–	–
Push function (on/off, up and down)	●		●		●	●
Dimming (only up or only down)	●		●		–	–
ON/OFF function	●		●		●	●
Overriding central control	●		●		–	–
Stairwell function (timer)	●		●		–	–
With integrated timer clock	–	●	–	●	–	–
Discourage burglaries	–	●	–	●	–	–
System analysis software		●		●	–	–
Password protection		●		●	–	–
Minimising standby losses		●		●	–	–
Menu navigation in	German, English, French, Italian, Spanish		German, English, French, Italian, Spanish		–	–
Configuration using	rotary push key and screen		rotary push key and screen		dip switch	dip switch

Overview of the LiCS Indoor System Network

Product matrix	Light Controller IP/DALI	Light Controller IP/DALI W
MultiSensors	 <p>MultiSensors (movement and brightness)</p>	
High Bay Sensors	 <p>Industrial Sensors (movement or constant light control)</p>	
Extender*		
Input devices	8 buttons (mains voltage-compatible) DALI buttons (4 channel)	8 buttons (mains voltage-compatible), EnOcean wireless modules DALI buttons (4 channel)

* Functionality limitations of the system possible; please observe the notes in the controller operation manuals.

■ SYSTEM INFORMATION

Server (Win 7) or LightBox

Optional: Access Point for operating elements

■ FUNCTIONS LIGHT CONTROLLER IP/DALI

- Network-compliant:
 - Intelligent networking of DALI devices
- Lighting control:
 - 3 level motion detection (automatic and semi-automatic)
 - Constant light control
 - Intelligent day- and time-dependent switching functions
 - Astro function
 - Scene settings
 - Push function (on/off, up and down)
 - Chain command (push button-controlled sequence of commands)
 - Dimming (only up or only down)
 - ON function, OFF function
 - Light value
 - Stairway function (timer)
 - Retrieval of various sensor-gauged values
 - Logic functions
- Push-key and operating element:
 - Classic push buttons
 - Touch4Light
 - Tablet
 - EnOcean
 - DALI buttons
- Documentation:
 - Device documentation
 - Save/Load
 - Automated error detection (email report)
 - User accounts (password protection)
- Language:
 - German
 - English
 - Further language on request
- Further functions:
 - Minimising standby losses
 - Intelligent device exchange


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Overview of the LiCS Indoor System Wireless

General Functions

- Selection of the operating mode via a dip switch (for the XSW-E6 Light Controller)
- Scalable systems - from standalone right up to interlinked network operation
- Maintenance-free EnOcean wireless communication
- Connection to standard-compliant DALI luminaires
- An independent version (XSW-E64 Light Controller) and a version for integration into a luminaire (XSW-E6 Light Controller) are available
- All the functions of a wired system plus the advantages of flexible installation

Operating Mode 1 - Network

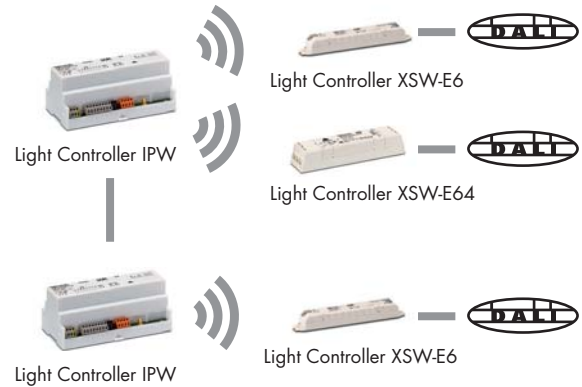


Functions

- Wireless integration into a LiCS system network: commissioning, configuration and control
- Wireless integration of a further DALI universe per IPW Light Controller

Light Controller XSW-E64/XSW-E6



Operating Mode 2 - Mesh Network

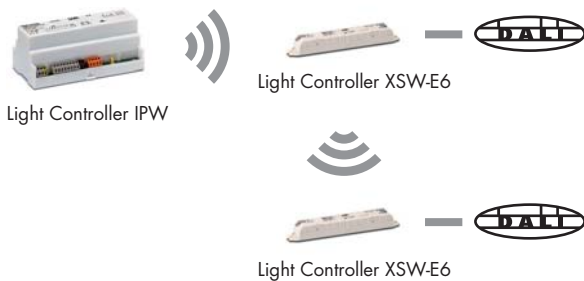

Functions

- Wireless integration into a LiCS system network: commissioning, configuration and control
- Larger range thanks to mesh functionality

Operating Mode 3 - Standalone



Functions

- Configuration via PC/Laptop
- Control via wireless push buttons (EnOcean)
- Definition of scenes and groups

Light Controller IP/DALI

For installation in a distribution board

This light control gear (gateways) is designed for installation in a distribution board.

Technical notes

Configuration interface: via browser via tablet/PC

Ambient temperature t_a : 5 to 50 °C

(186484, 186485 t_a : 5 to 45 °C)

Push-in terminals with lever opener: 0.5-2.5 mm²

Degree of protection: IP20, Protection class I

RFI-suppressed



The MultiSensors and DALI push-button interfaces are connected directly to the DALI bus.

Connections


- Mains connection: 220-240 V AC, 50-60 Hz
- Max. power consumption 12 W
- 2xRJ45 (Ethernet TCP/IP) 10/100MBit/s, Daisy Chain
- 1 DALI bus: max. current on DALI bus = 200 mA (see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.
- 8 independently configurable push button inputs, cables must be rated for mains voltage
- Minimising standby losses

Software download

See product page under www.vossloh-schwabe.com

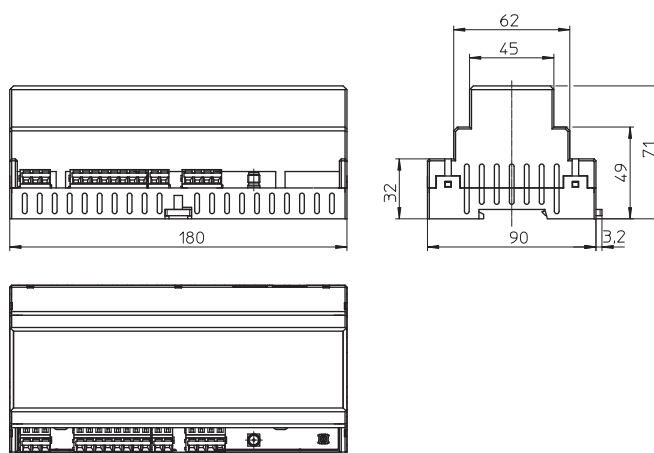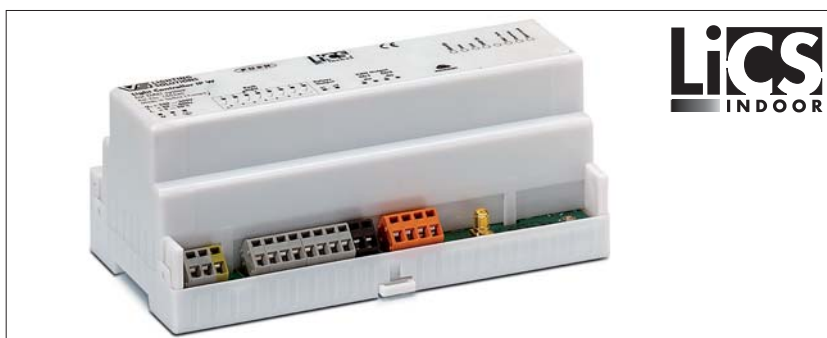

System architecture

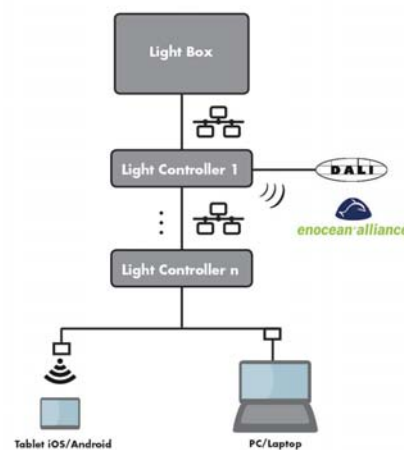

Light Controller IP/DALI W 2CH / IP/DALI W

Suitable for wireless operation with EnOcean

No. of wireless modules: 16 pcs.

Radio signal with a frequency of 868 MHz

Antenna needed



Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	No. of MultiSensors or DALI push-button interfaces (pcs./controller)	EnOcean	Dimensions (LxWxH) mm	Horizontal pitches (hp)	Weight g
IP/DALI 2CH	186484	2x64	2x36	no	180x90x71	10	340
IP/DALI	186339	64	36	no	180x90x71	10	340
IP/DALI W 2CH	186485	2x64	2x36	yes	180x90x71	10	340
IP/DALI W	186340	64	36	yes	180x90x71	10	340

LightBox

For operating Light Controllers of the IP/DALI series

The LightBox serves to manage the tasks performed of up to ten Light Controllers IP and is pre-configured for plug-and-play operation.

Technical notes


- Mains switch for powering up the LightBox (activates automatically once mains power is restored following a power cut).
- Indicator: green status LED at the front
- As an alternative to client-based configuration (e.g. using a tablet, etc.), a monitor or input device can be connected during operation for configuration purposes.
- Optional Mailserver, Internet remote access
- The Windows 8.1N operating system merely needs to be personalised and activated by telephone.

Connections


- Mains switch
- Mains connection with power supply unit
- RJ45 connection (Ethernet)
- 6 x USB
- HDMI output
- Display port
- Wi-Fi antenna



System architecture LightBox with DHCP

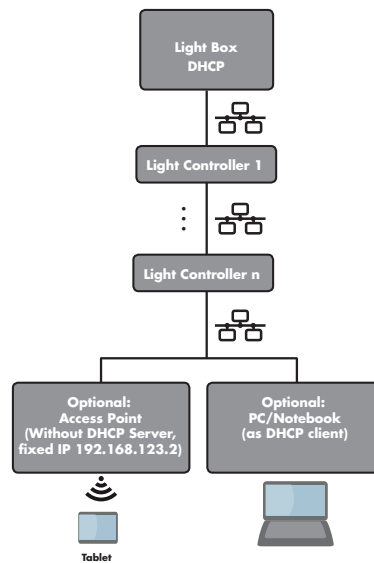

System architecture LightBox without DHCP

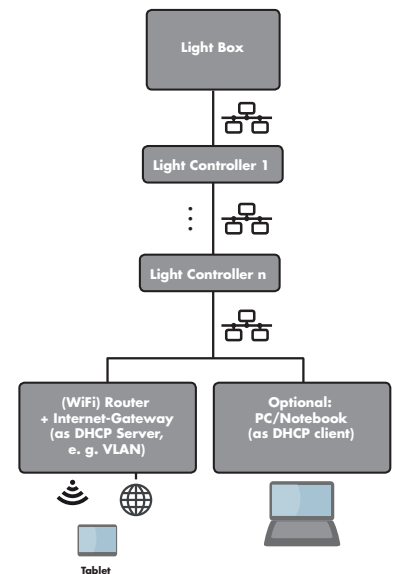


Type	Suitable for	Ref. No.	Max. No. of Light Controller per LightBox (pcs.)	Dimensions (LxWxH) mm	Weight g
LightBox	network- and internet-based operation (as a DHCP client)	186512	10	127x127x45	600
LightBox DHCP	stand-alone light management (as a DHCP server)	186513	10	127x127x45	600

DALI Push-button Interface

For extension of up to 4 push buttons to a Light Controller IP/DALI

DALI push-button interfaces make it possible to install additional push-buttons at any point along the DALI bus without needing to connect an additional power supply source.
 For built-in into flush-type boxes
 Control input: DALI acc. to IEC 62386:2008
 DALI current consumption: 4 mA
 With built-in LED (red) for configuration
 Dimensions (LxWxH): 32x22x13 mm, weight: 30 g
 Connection leads: 0,5 mm², ferrules on bare end of core
 Protection class II



Ref. No.: 186476

Light Controller XSW-E6

Suitable for installation in luminaires/ on mounting rails

These light controllers are suitable for installation in luminaires or on mounting rails.

Technical notes

Configuration interface: wireless (EnOcean)
and mode dip switch

Ambient temperature ta: 5 to 50 °C

Push-in terminals with lever opener: 0.5-1.5 mm²

Degree of protection: IP20

For luminaires of protection class II

RFI-suppressed

The MultiSensors are connected directly to the DALI bus.

Connections

- Mains connection: 220-240 V AC, 50-60 Hz
- Max. power consumption 1 W
- 1 DALI bus: max. current on DALI bus = 20 mA
(see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.

Operating modes


1. Network
2. Mesh network
3. Standalone

Functions of the Network version

Wireless training and coupling of the system, integration into Light Controller IP network (Ref. No.: 186485 and 186340), centralised configuration


Functions of Standalone mode

Teach-in function of EnOcean modules, push function (6 synchronised drivers/EBs), ON/OFF function, individual addressing option, group formation, scenes, light values
Software available for download:
see product page under www.vossloh-schwabe.com
Requirement for Standalone mode:
EnOcean USB drive (available on request)

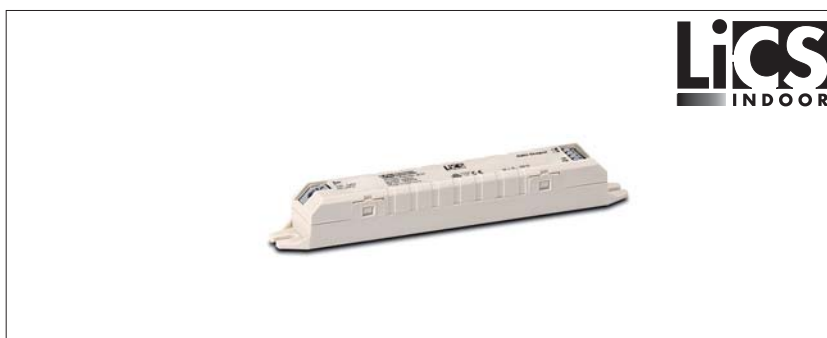

Additional notes

- Sensors and push buttons are only permissible in operating mode 1.
- Max. 4 XSW-E devices per IP DALI controller.
- Max. 58 DALI addresses per mesh network.

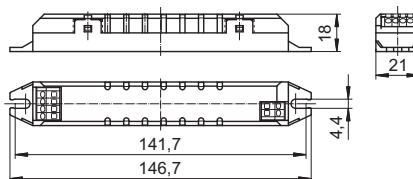

Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	Max. No. of MultiSensors pcs./controller	EnOcean	Dimensions (LxWxH) mm	Weight g
XSW-E6	186516	6	1	yes	146.7x21x18	40

Light Controller XSW-E64

Wireless light controller

These light control devices are suitable for independent operation (e.g. in false ceilings).

Technical notes

Configuration interface: wireless (EnOcean)
 Ambient temperature t_a : 0 to 50 °C
 Max. casing temperature t_c : 65 °C
 Screw terminals: 0.75–2.5 mm²
 Degree of protection: IP20, Protection class II
 RFI-suppressed
 The MultiSensors are connected directly to the DALI bus.

Connections

- Mains connection: 220–240 V AC/50–60 Hz
- Max. power consumption 6.7 W
- 1 DALI bus: max. current on DALI bus = 200 mA (see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.

Operating modes


1. Network

Functions

Wireless training and coupling of the system, integration into Light Controller IP network (Ref. No.: 186485 and 186340), centralised configuration

Additional notes

- 4 XSW-E64 devices (max.) per IP DALI controller.
- Full integration of sensors and DALI bush buttons.

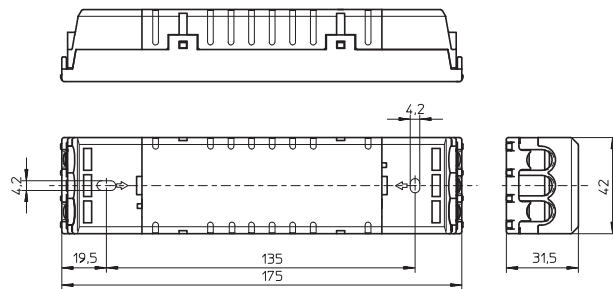

Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	Max. No. of MultiSensors pcs./controller	EnOcean	Dimensions (LxWxH) mm	Weight g
XSW-E64	186517	64	36	yes	175x42x31.5	127

Light Controller L/LW and LS/LSW

For installation in a distribution board

This light control gear is designed for installation in a distribution board.

Technical notes

Configuration interface: display

and rotary push key (on the controller)

Ambient temperature t_a : 5 to 50 °C

Push-in terminals with lever opener: 0.5-1.5 mm²

Degree of protection: IP20, Protection class I

RFI-suppressed

The MultiSensors are connected directly to the DALI bus.

Connections

- Mains connection: 220-240 V AC, 50-60 Hz
- Max. power consumption 9 W
- 1 DALI bus to 3 pairs of terminals: max. current on DALI bus = 200 mA (see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.
- 6 independently configurable push button inputs, cables must be rated for mains voltage
- Minimising standby losses

General functions




Automatic and semi-automatic motion detection, constant light control, push function, ON/OFF function, stairwell function (timer), system analysis software, password protection
Software languages: German, English, French, Italian, Spanish

Additional functions

- Scene settings, control options (single and/or group) (Light Controller L/LW)
- Discourage burglaries, timer clock, control options (group) (Light Controller LS/LSW)



LICS
INDOOR



Light Controller LW/LSW

Suitable for wireless operation with EnOcean
No. of wireless modules: 16 pcs.
Radio signal with a frequency of 868 MHz
Antenna needed



DALI Group Configuration Tool



FMH4-rw Ref. No.: 555534

Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	Max. No. of MultiSensors pcs./controller	EnOcean	Dimensions (LxWxH) mm	Horizontal pitches hp	Weight g
L	186189	64	36	no	126x90x68	7	250
LS	186276	64	36	no	126x90x68	7	250
LW	186190	64	36	yes	126x90x68	7	250
LSW	186323	64	36	yes	126x90x68	7	250

Antennas

To supplement LiCS Indoor System


To ensure faultless wireless operation, an antenna must be connected that is set to the respective frequency.

When fitting the antenna, care must be taken that it is not shielded by metal objects, e.g. steel cabinets, radiators, ventilation shafts etc., to ensure optimum signal reception.

The requisite antenna is provided in two models: the screw-base model comes with a detachable connection cable, while the magnetic-base model is fitted with a non-detachable connection cable.


Magnetic-base antenna with connection cable

Antenna dimensions (ØxH): 29x88 mm
Cable diameter: Ø 6 mm, length: 2.5 m
Min. bending radius of the cable: 50 mm
Impedance: 50 Ω
Capacity: 10 W pulsed
Ambient temperature t_a : -40 to 80 °C
Storage temperature: -40 to 80 °C
Degree of protection: IP66
Weight: 62 g
Ref. No.: 186211



Screw-base antenna

Antenna dimensions (ØxH): 33x89 mm
Impedance: 50 Ω
Capacity: 8 W pulsed
Ambient temperature t_a : -40 to 70 °C
Storage temperature: -40 to 80 °C
Degree of protection: IP66
Weight: 41 g
Ref. No.: 186212



Connection cable for the screw-base antenna

Cable diameter: Ø 6 mm, length: 1.5 m
Min. bending radius of the cable 50 mm
Weight: 66 g
Ref. No.: 186213



Light Controller S

For independent operation

These light control devices are suitable for independent operation (e.g. in false ceilings).

Technical notes

Configuration interface: dip switch (on the device)

Ambient temperature t_a : 0 to 50 °C

Max. casing temperature t_c : 65 °C

Screw terminals: 0.75-2.5 mm²

Degree of protection: IP20, Protection class II

RFI-suppressed


The MultiSensors are connected directly to the DALI bus.

Connections

- Mains connection: 220-240 V AC/DC, 0/50-60 Hz
- Max. power consumption 6.5 W
- 1 DALI bus: max. current on DALI bus = 200 mA (see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.
- 1 configurable push button input: cables must be rated for mains voltage

Functions

Automatic and semi-automatic motion detection, constant light control, push function (64 EBs synchronously), ON/OFF function, stairwell function (timer), control option (broadcast)

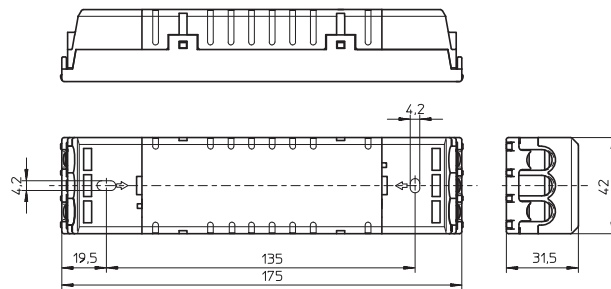

Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	Max. No. of MultiSensors pcs./controller	EnOcean	Dimensions (LxWxH) mm	Weight g
S	186210	64	36	no	175x42x31.5	150

1

2

3

4

5

6

7

8

9

10

11

12

Light Controller XS

For luminaire installation

These light control devices are suitable for operation in luminaires.

Technical notes

Configuration interface: dip switch (on the device)

Ambient temperature t_a : 5 to 50 °C

Max. casing temperature t_c : 60 °C

Service life time: 50,000 hrs.

Push-in terminals with lever opener: 0.5-1.5 mm²

Degree of protection: IP20

RFI-suppressed

For luminaires of protection class I and II

The MultiSensors are connected directly to the DALI bus.

Connections


- Mains connection:
220-240 V AC/DC, 0/50-60 Hz
- Max. power consumption 0.8 W
- 1 DALI bus: max. current on DALI bus = 20 mA
(see the respective data sheet for current consumption of individual components)
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.
- 1 configurable push button input

Functions

Automatic and semi-automatic motion detection, constant light control, push function (10 EBs synchronously), ON/OFF function, control option (broadcast)



LICS
INDOOR

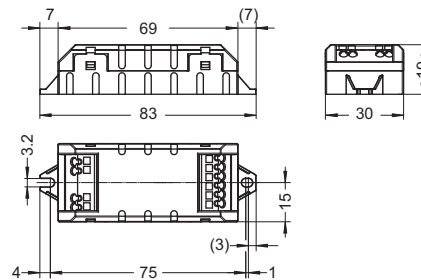

Light Controller	Ref. No.	Max. No. of operating devices pcs./controller	Max. No. of MultiSensors pcs./controller	EnOcean	Dimensions (LxWxH) mm	Weight g
XS	186220	10	4	no	83x30x19	30

Extender

To extend LiCS Indoor system

An extender enables the maximum number of DALI-compliant control gear units within a standard DALI system to be increased.

This means the DALI extender is installed and addressed in instead of the ballast. Up to 64 DALI control gear units can be connected to an extender output. All of these control gear units will either respond in the same way to an incoming signal (Ref. No.: 186194) or, given changed characteristics, will transfer values to the addressed DALI control gear units (Ref. No.: 186481).

The extender for DALI systems can only be used in combination with a DALI controller. When DALI commands are received, the extender behaves just like a DALI-compliant ballast.

Technical notes

Configuration interface:

via a DALI controller

Ambient temperature t_a : 0 to 50 °C

Max. casing temperature t_c : 65 °C

Screw terminals: 0.75 - 2.5 mm²

Degree of protection: IP20, Protection class II

RFI-suppressed

Connections


- Mains connection: 220-240 V AC/DC, 0/50-60 Hz
- Max. power consumption: 6.5 W
- For DALI signals in acc. with IEC 62386
- DALI current consumption: 2 mA
- 1 DALI bus to 3 terminal pairs: max. current on the DALI bus = 200 mA
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- The DALI bus features reversible electronic overload and short-circuit protection.

Functions

Connection of up to 64 ballasts to a single DALI address

Extender Flex serves to transfer characteristics, which permit light to be staged in a more flexible manner, to the connected DALI addresses.

Example: group devices can be dimmed to varying degrees.

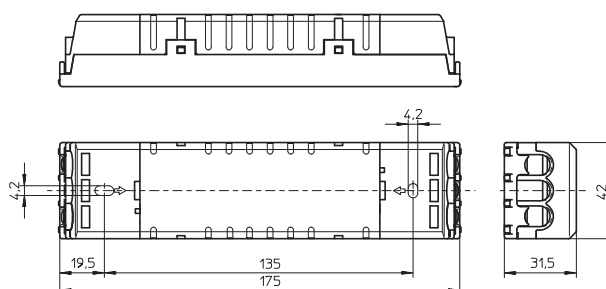

Type	Ref. No.	Max. No. of secondary control gear units per Extender pcs./Extender	Functions	Dimensions (LxWxH) mm	Weight g
Extender	186194	64	Broadcast Classic	175x42x31.5	150
Extender Flex	186481	64	Broadcast Flexible: a compilation of characteristics can be made available on request	175x42x31.5	150

MultiSensors



To supplement LiCS Indoor system

Daylight and motion sensors increase both energy savings and convenience.

VS MultiSensors detect both light levels and motion. In addition, MultiSensors feature a space-saving design and were specifically developed to work with VS Light Controllers. No external power supply is required, as the sensors are supplied via the DALI bus.

Technical notes

Configuration interface:
via the Light Controller

Ambient temperature t_a : 0 to 50 °C

Push-in terminals with lever opener: 0.5 - 1.5 mm²

DALI current consumption: 4 mA

Functions

Motion detection and monitoring of lighting levels. With built-in LED (red): the light flashes during configuration when the sensor is selected.


MultiSensor SM-E

For surface mounting

Dimensions (ØxH): 53x48.5 mm

Weight: 30 g

Ref. No.: 186320



MultiSensor FM-E


For ceiling installation

With cord grip

Dimensions (ØxH): 40x43.8 mm

Weight: 30 g

Ref. No.: 186321

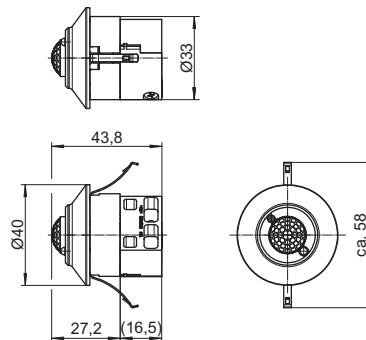


MultiSensor IL-E

For luminaire installation

Dimensions (ØxH): 45x31.9 mm

Weight: 30 g

Ref. No.: 186322





Industrial Sensors High Bay for Industrial Applications

To supplement LiCS Indoor system

Using DALI MovementSensors increases both energy savings and application flexibility.

Vossloh-Schwabe MovementSensors are even capable of detecting motion in rooms with high ceilings (up to 8 m in height). Specifically developed for use with VS Light Controllers, these MovementSensors have been optimised for unprotected installation (HB 65) and to deal with obstructions in the detection field.

VS BrightnessSensors detect light levels in difficult environments that require an IP65 degree of protection. The Brightness systems do not require an external power supply as the DALI lead can simply be connected through.

The fact that the sensors are connected via the DALI bus now makes it possible – and for the very first time – to manage an entire warehouse with just one Light Controller and to define individually adjustable or uniform lighting levels.

Technical notes


Configuration interface: via the Light Controller
Ambient temperature t_a : -5 to 50 °C
Dimensions (LxWxH): 98x73.2x34 mm
Push-in terminals with lever opener: 0.5-1.5 mm²

Functions

Reliable HF motion detection with indication LED (red) (MovementSensor)
Reliable monitoring of light levels with indication LED (red) (BrightnessSensor)

MovementSensor HB 65

For surface mounting
With cord grip
Degree of protection: IP65
Protection class II
DALI current consumption: 2 mA
Weight: 151 g
Ref. No.: 186311

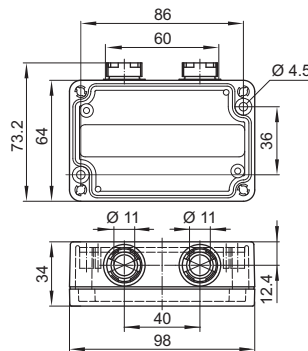

BrightnessSensor IP65

For surface mounting
With cord grip
Degree of protection: IP65
Protection class II
DALI current consumption: 4 mA
Weight: 140 g
Ref. No.: 186370



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12



General safety information

- LiCS products may only be installed and commissioned by authorised and fully qualified staff.
- These instructions must be carefully read before installing and commissioning the system, as this is the only way to ensure safe and correct handling.
- Before any work is carried out on the equipment, it must be disconnected from the mains.
- All valid safety and accident-prevention regulations must be observed.
- The products should never be inexpertly opened as this poses lethal danger due to electrical shock. Repairs may only be undertaken by the manufacturer.
- On no account may the DALI control lead be used to carry mains voltage or any other external voltage as this can destroy individual system components.


Light Controller IP/DALI

- Installation**
- In a distribution board on a 35-mm mounting rail in acc. with DIN 43880; required installation space: 10 hp (horizontal pitches) (180 mm)
 - Hook the light controller over the upper edge of the rail using the two mounting notches. Then carefully press the controller onto the lower part of the rail until the mounting spring on the controller snaps into place over the rail. If required, use a screwdriver to help you with the spring.

- Removal**
- To remove the controller from the mounting rail, use a screwdriver to loosen the spring and ease the controller over the rail flange from the bottom.

Installation instructions

- Conductor cross-section for all terminals: 0,5-2,5 mm² for rigid or flexible conductors
- Cable preparation (see right)
- To protect the equipment, a 10 A or 16 A, Type B automatic circuit breaker must be fitted.
- Push button inputs 1-8: cables must be rated for mains voltage; max. cable length = 100 m.
- As a standard DALI bus is not SELV-compliant, the DALI lead must be rated for mains voltage.
- A max. of 64 DALI operating devices in aggregate can be connected as well as up to 36 MultiSensors or DALI push-button interfaces, which in total must not exceed 200 mA. The exact number of components can be found in the manual.
- The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using 5 x 1,5 mm².
- Please observe the maximum lengths of the DALI lead during installation:



	2.5 mm ²	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	300 m	180 m	130 m	80 m


- The relay contact is a potential-free closing contact. The current load of the relay contact must not exceed an Ohmic load of $I_{max.} = 3$ A. When using the standby contact, an additional external power relay should be used.
- Connection to the LightBox is effected via RJ45 (Ethernet TCP/IP) 10/100 Mbit/s.
- The two RJ45 ports can be used as a (daisy chain) switch.
- It is not recommended to connect atypical network components of a light management system (e.g. printers) directly to the Light Controller.



Additional information

- To ensure faultless wireless operation, an antenna must be connected that is set to the respective frequency. This antenna is not included in the scope of delivery.
- Please refer to the manual at www.vossloh-schwabe.com for exact instructions on how to configure the system using the controller.
- The outputs of different controllers must not be connected with each other.
- To ensure safe operation of the controller, the maximum ambient temperature must not be exceeded.
- Integration of VS Extenders limits the whole system to its basic functions for control. Please observe the notes in the appendix of the controller operation manuals.

Circuit diagram of Light Controller IP/DALI

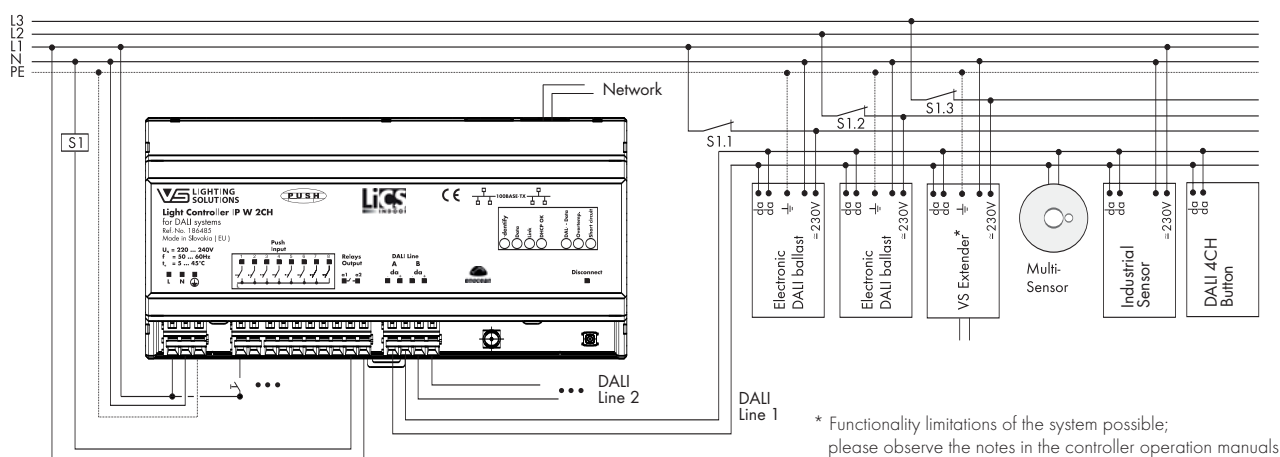

Technical details Light Controller PI/DALI

Light Controller	IP/DALI	IP/DALI W	IP/DALI 2 CH	IP/DALI W 2 CH
Ref. No.	186339	186340	186484	186485
Supply voltage	220–240 V AC, 50–60 Hz			
Power consumption	12 W			
Ambient temperature t_a	5 to 50 °C		5 to 45 °C	
DALI output (da+)	max. 200 mA current drain		2 x max. 200 mA current drain	
No. of operating devices (DALI-EBs, LiCS-Extender, HB sensors)	max. 64 pcs. per Controller (expandable with the Extender)		max. 2 x 64 pcs. per Controller (expandable with the Extender)	
No. of MultiSensors or DALI push-button interfaces	max. 36 pcs.		max. 2 x 36 pcs.	
RF input	–	Antenna for a reception range of 868 MHz	–	Antenna for a reception range of 868 MHz
Wireless modules	–	All radio buttons with PT radio sensors by EnOcean with 868 MHz	–	All radio buttons with PT radio sensors by EnOcean with 868 MHz
No. of wireless modules	–	max. 16 pcs. with up to 4 buttons	–	max. 16 pcs. with up to 4 buttons
Relais (Output a1, a2)	250 V, max. 3 A ohmic load			
Push inputs 1–8	220–240 V AC, 50–60 Hz			
Degree of protection	IP20			
Protection class	I			
Weight	340 g			
CE requirements	EMC in acc. with EN 61547, RFI in acc. with EN 55015, Safety in acc. with EN 61347-2-11			


Light Controller L/LS and LW/LSW

- Installation**
- In a distribution board on a 35-mm mounting rail in acc. with DIN 43880; required installation space: 7 hp (horizontal pitches) (126 mm)
 - The controller must be installed so the display screen is in the upper left corner.
 - Hook the light controller over the upper edge of the rail using the two mounting notches. Then carefully press the controller onto the lower part of the rail until the mounting spring on the controller snaps into place over the rail. If required, use a screwdriver to help you with the spring.

- Removal**
- To remove the controller from the mounting rail, use a screwdriver to loosen the spring and ease the controller over the rail flange from the bottom.

Installation instructions

- Conductor cross-section for all terminals: 0.5–1.5 mm² for rigid or flexible conductors
- Cable preparation (see right)
- To protect the equipment, a 10 A or 16 A, Type B automatic circuit breaker must be fitted.
- Push button inputs 1–6: cables must be rated for mains voltage; max. cable length = 100 m.
- As a standard DALI bus is not SELV-compliant, the DALI cable must be rated for mains voltage.
- A max. of 64 DALI operating devices in aggregate can be connected as well as up to 36 MultiSensors, which in total must not exceed 200 mA. The exact number of components can be found in the manual.
- The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using 5x1.5 mm².
- Three electrically connected DALI outputs make it easier to connect DALI control gear. Please observe the maximum lengths of the DALI bus during installation:




	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	180 m	130 m	80 m

- The relay contact is a potential-free closing contact. The current load of the relay contact must not exceed an Ohmic load of $I_{max.} = 3$ A. When using the standby contact, an additional external power relay should be used.
- Although models of the Light Controller L/LS and LW/LSW feature an antenna-connection jack (located top right on the front), only the jack on the LW/LSW model is functional. This is where the antenna is connected to enable wireless operation (EnOcean) of the Light Controller LW/LSW.

Additional information

- To ensure faultless wireless operation, an antenna must be connected that is set to the respective frequency. This antenna is not included in the scope of delivery.
- Please refer to the manual at www.vossloh-schwabe.com for exact instructions on how to configure the system using the controller.
- The outputs of different controllers must not be connected with each other.
- To ensure safe operation of the controller, the maximum ambient temperature must not be exceeded.

Circuit diagram of Light Controller L/LS and LW/LSW

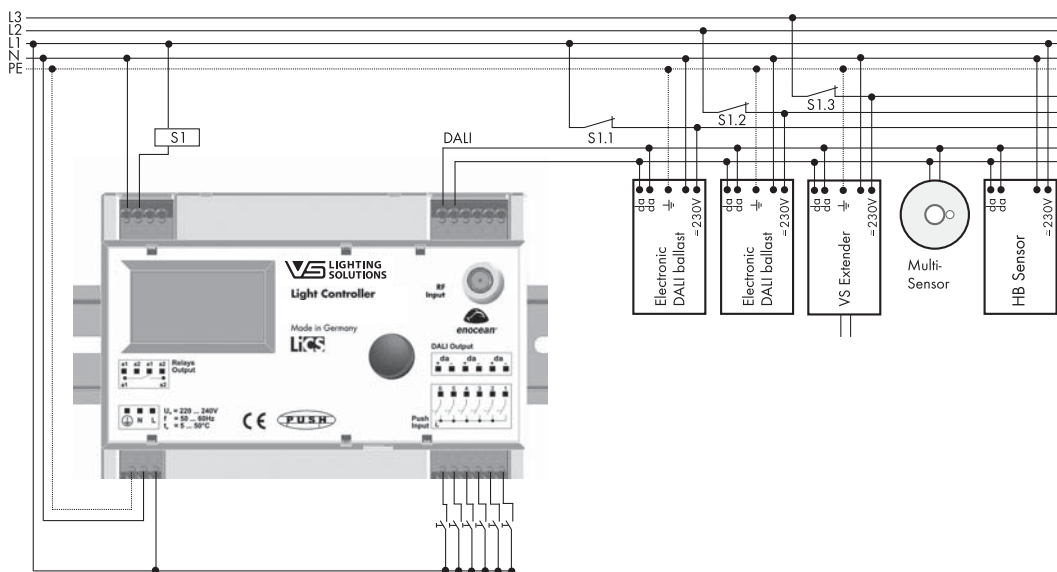

Technical details Light Controller L/LS and LW/LSW

Light Controller	L	LS	LW	LSW
Ref. No.	186189	186276	186190	186323
Supply voltage	220–240 V AC, 50–60 Hz			
Power consumption	9 W			
Ambient temperature t_a	5 to 50 °C			
DALI output (da+ -)	max. 200 mA current drain			
No. of operating devices (DALI-EBs, LiCS-Extender, HB sensors)	max. 64 pcs. per Controller (expandable with the Extender)			
No. of MultiSensors	max. 36 pcs.			
RF input	–	Antenna for a reception range of 868 MHz		
Wireless modules	–	All radio buttons with PTM radio sensors by EnOcean with 868 MHz		
No. of wireless modules	–	max. 16 pcs. with up to 4 buttons		
Relais (Output a1, a2)	250 V, max. 3 A ohmic load			
Push inputs 1–6	220–240 V AC, 50–60 Hz			
Degree of protection	IP20			
Protection class	I			
Weight	250 g			
CE requirements	EMC in acc. with EN 61547, RFI in acc. with EN 55015, Safety in acc. with EN 61347-2-11			

1

2

3

4

5

6

7

8

9

10

11

12

Light Controller S





Installation

- Independent installation, e.g. in false ceilings
- Easy and time-saving installation thanks to end caps that snap into place without needing tools.
- Clearance: min. 0.1 m to walls, ceilings, insulation and other electronic devices; min. 0.25 m to sources of heat (e.g. lamps)
- Surface: solid, must not let the controller sink into insulation material
- Fastening: using 4-mm screws

Installation instructions

- Conductor cross-section for all terminals: 0.75–2.5 mm²
- Cable preparation (see right)
- Screw terminals: max. tightening torque = 0.4 Nm
- A standard DALI bus only features basic insulation. All DALI cables must be rated for mains voltage.
- A max. of 64 DALI operating devices in aggregate can be connected as well as up to 36 MultiSensors, which in total must not exceed 200 mA. The exact number of components can be found in the manual.
- The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using NYM 5x1.5 mm². Please observe the maximum lengths of the DALI bus during installation:



	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	180 m	130 m	80 m

- Push button inputs: cables must be rated for mains power; maximum 100 m.

Light Controller XS

Installation


- Any installation location
- Suitable for installation only in dry rooms or in luminaires, cases, casings or similar. If destined for use in outdoor applications or spaces subject to higher degrees of moisture, the Light Controller XS must be installed in a casing with a suitable degree of protection.
- Fastening with 3 mm or 4 mm screw
- Take care to ensure a solid, flat surface.

Application/Function

- Suitable only for installation in a luminaire; unsuitable for independent operation.
- For constant light control or motion detection, or a combination of both.
- In addition, a target value for constant light control can be set via manual dimming.

Installation instructions

- Conductor cross-section for all terminals: 0.5–1.5 mm²
- Cable preparation (see right)
- A standard DALI bus only features basic insulation. All DALI cables must be rated for mains voltage.
- Operation without sensors: A max. of 10 DALI operating devices can be connected; no MultiSensors are allowed.
- Operation with sensors: If one VS MultiSensor is connected a max of 8 DALI ballasts can be connected in addition.
- Push button inputs: cables must be rated for mains power; maximum 15 m.
- Please observe the maximum lengths of the DALI bus during installation: The DALI lead does not exceed a maximum length of 95 m, e.g. using NYM 5x1.5 mm²
- The power supply and the DALI lead can be laid in a single cable, e.g. using 5x1.5 mm².







Additional information

- The outputs of different Light Controllers S/XS must not be connected with each other.
- All control gear that is connected to the output of the DALI Extender is synchronously operated in "broadcast" mode; the output side is not addressed.
- To ensure safe operation of the Light Controller S/XS, the maximum casing temperature at the measuring point (t_c) must not be exceeded.
- Please refer to the manual at www.vossloh-schwabe.com for exact instructions on how to configure the system using the controller.

Circuit diagram of Light Controller S

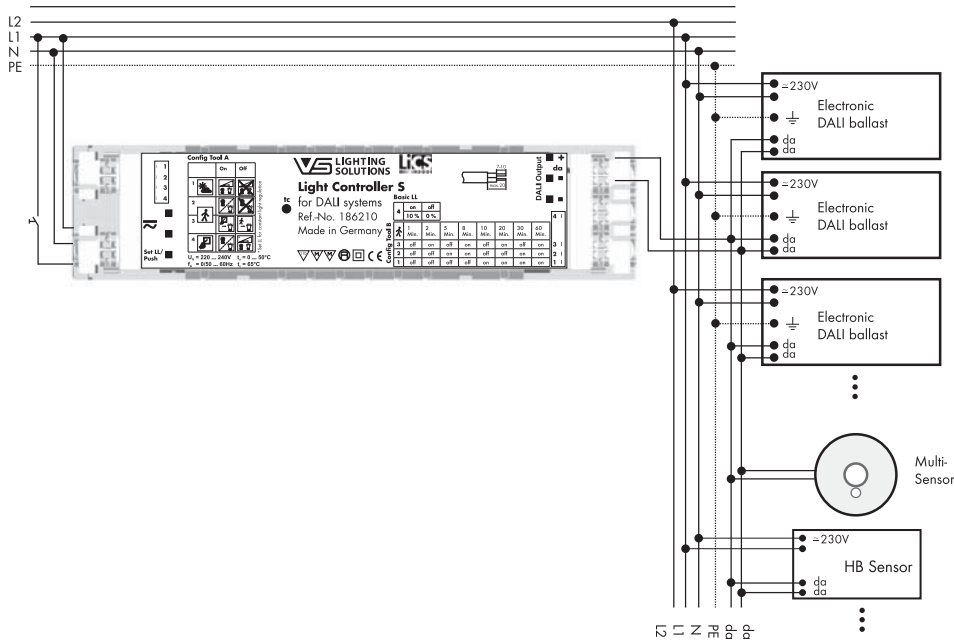


Circuit diagram of Light Controller XS

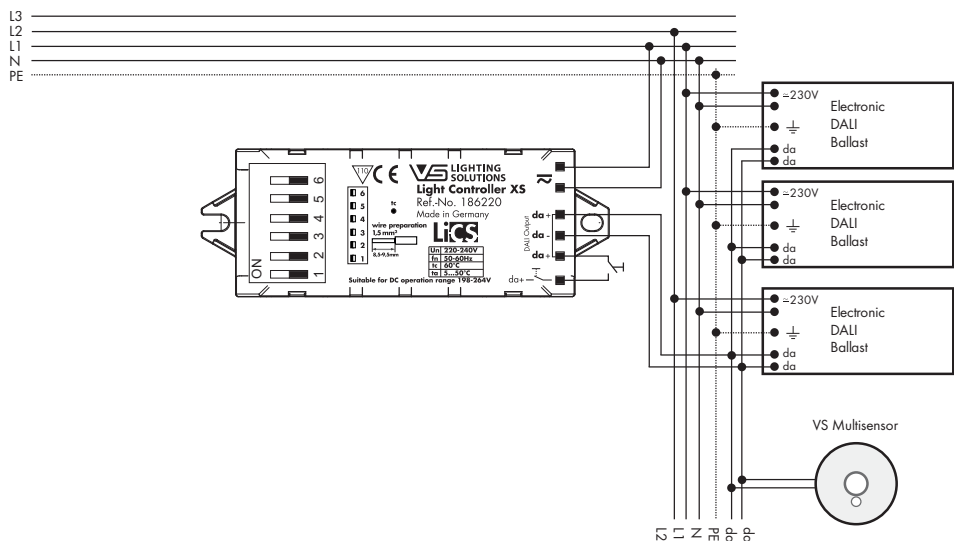


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Circuit diagram of Light Controller XSW-E64

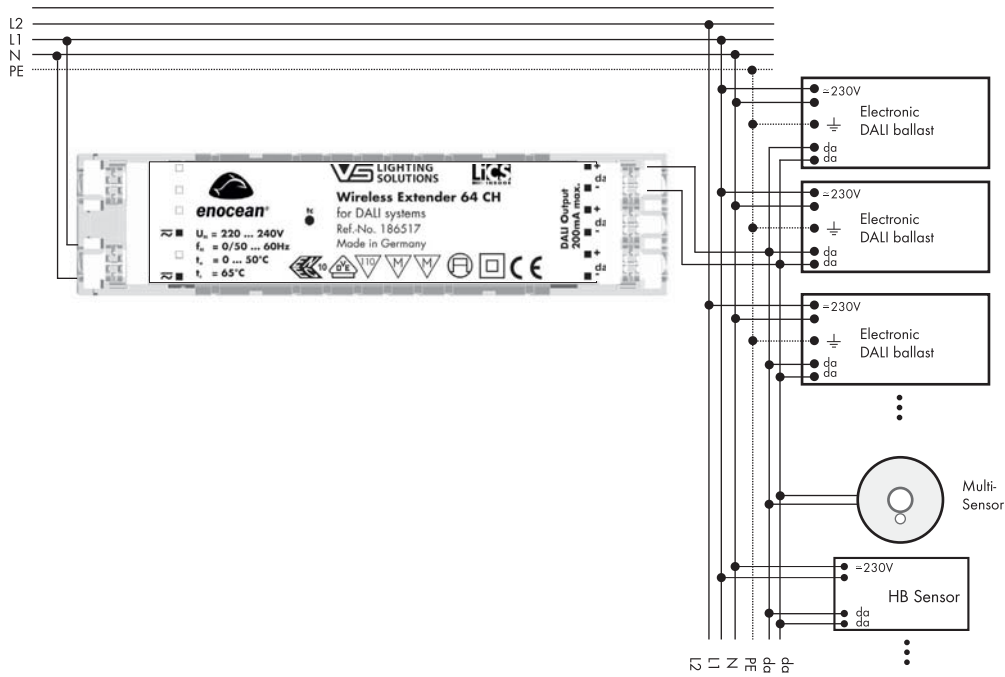

Circuit diagram of Light Controller XSW-E6

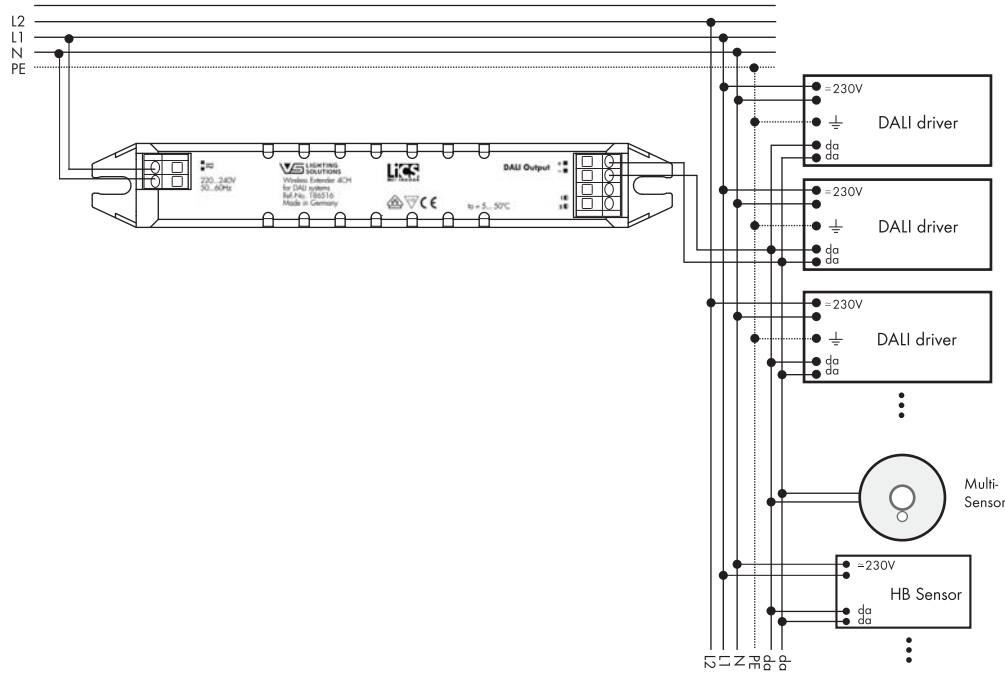



Technical details Light Controller S and XS

Light Controller	S	XS
Ref. No.	186210	186220
Supply voltage	220-240 V AC/DC, 0/50-60 Hz	
Power consumption	6.5 W	0.8 W
Ambient temperature t_a	0 to 50 °C	
DALI output (da+-)	max. 200 mA current drain	max. 20 mA current drain
No. of operating devices (DALI-EBs, LiCS-Extender, HB sensors)	max. 64 pcs. per Controller (expandable with the Extender)	max. 10 pcs. per Controller (without sensors)
No. of MultiSensors	max. 36 pcs.	max. 4 pcs.
RF input	-	
Wireless modules	-	
No. of wireless modules	-	
Relais (Output a1, a2)	-	
Push inputs	220-240 V AC/DC, 0/50-60 Hz	
Degree of protection	IP20	
Protection class	II	I and II
Weight	150 g	30 g
CE requirements	EMC in acc. with EN 61547, RFI in acc. with EN 55015, Safety in acc. with EN 61347-2-11	

Extender

Installation



- Independent installation, e.g. in false ceilings
- Easy and time-saving installation due to end caps that snap into place without needing tools
- Clearance: min. 0.1 m to walls, ceilings, insulation and to other electronic devices; min. 0.25 m to sources of heat (e.g. lamps)
- Surface: solid, must not permit the extender to sink into insulation material
- Fastening: using 4-mm screws

Installation instructions

- Cross-section of primary/secondary conductor: 0.75-2.5 mm²
- Cable preparation (see right)
- Screw terminals: max. tightening torque = 0.4 Nm
- Length of the secondary bus cable: max. 300 m
- A standard DALI bus only features basic insulation. All DALI cables must be rated for mains voltage. The power supply and the DALI lead can be laid in a single cable (max. 100 m).
- Mains power cables and DALI cables should not be laid directly parallel to lamp cables (min. clearance = 0.25 m).
- A maximum of 64 DALI operating devices in total can be connected.

Additional information


- The extender can only be operated if connected to a DALI control unit. Please refer to the respective operating instructions for information on the control unit.
- The DALI extender is integrated into the DALI system using the "random address" assignment method.
- Three electrically connected DALI outputs make it easier to connect DALI ballasts. A maximum of 64 DALI operating devices in total can be connected.
- The outputs of several extenders must not be connected with each other.
- All control gear that is connected to the output of the DALI Extender is synchronously operated in "broadcast" mode; the output side is not addressed.
- To ensure safe operation of the Extender, the maximum casing temperature at the measuring point (t_c) must not be exceeded.



1
2
3
4
5
6
7
8
9
10
11
12



Circuit diagram of the Extender

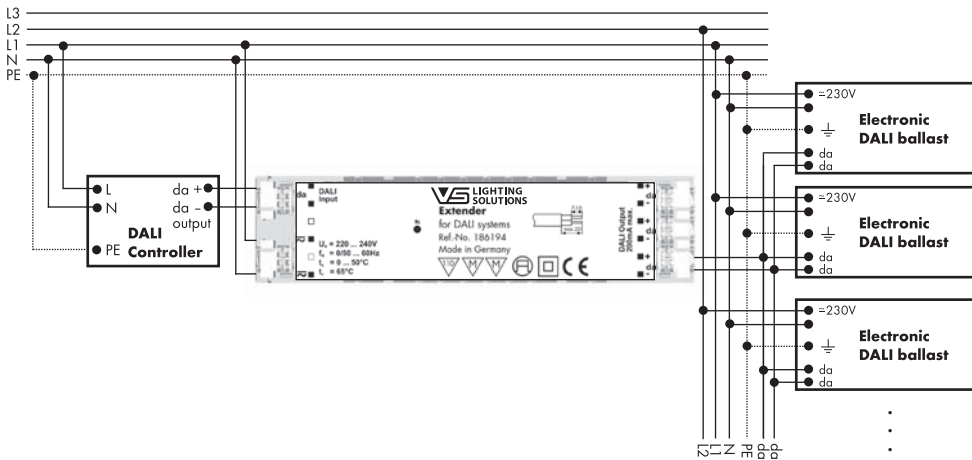

Technical details Extender

Extender	
Ref. No.	186194/186481
Supply voltage	220 - 240 V AC/DC, 0/50-60 Hz
Power consumption	6.5 W
Control input	DALI in. acc. with IEC 62386-102/-201
DALI output	max. 64 pcs. DALI operating devices or max. 200 mA (expandable with the Extender)
Ambient temperature t_a	0 to 50 °C
Casing temperature t_c	max. 65 °C
Degree of protection	IP20
Protection class	II
Weight	150 g
CE requirements	EMC in acc. with EN 61547, RFI in acc. with EN 55015, Safety in acc. with EN 61347-2-11

MultiSensors

Installation SM-E (Surface Mounted)


Prepare the cable accordingly and thread it through the back plate of the sensor at the side or from behind. Attach the back plate in the selected position using the two screws provided, then connect the cable to the sensor. Use two fingers to lightly press the springs of the sensor cover together and allow to lock into place along the guide rails inside the sensor's bottom face (see Fig. 1).

FM-E (Flush Mounted), with or without cord grip

Prepare the cable, connect to the sensor and attach cord grip if appropriate. Use two fingers to lightly press the sensor together and allow to lock into place in the pre-drilled hole (35 mm) in the selected position (see Fig. 2).

IL-E (In Luminaire)

Heed the dimension of the drilling template when inserting the sensor in the metal plate, which is 0.5-1 mm thick. Allow the sensor to lock into place in the precisely pre-drilled hole in the metal plate. Allow the sensor cover ring to lock into place from the other side in the recesses provided (see Fig. 3).

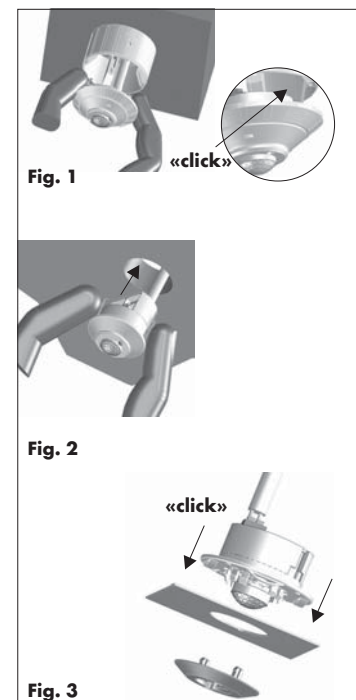




Installation instructions


- Conductor cross-section of all terminals: 0.5-1.5 mm² for both rigid and flexible conductors
- Preparation of the sensor cables (see right)
- As a standard DALI bus is not SELV-compliant, cables must be rated for mains voltage.
- The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using NYM 5x1.5 mm². Please observe the maximum lengths of the DALI bus during installation:

	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	180 m	130 m	80 m

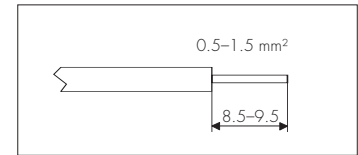


Additional information

- VS MultiSensors can only be operated in combination with a VS Light Controller from the LiCS indoor range.
- Please refer to the manual at www.vossloh-schwabe.com for exact instructions on how to configure the sensors.
- To ensure safe operation of the sensors, the maximum permitted ambient temperature must not be exceeded.
- The sensor must be positioned to ensure its reception range is not obstructed by objects, furniture, etc.
- See Fig. 4 for the sensor range.

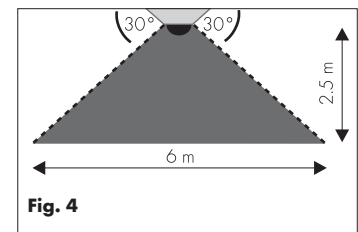

The height specified in Fig. 4 is a reference value. For other and specifically greater heights, it may be necessary to test the sensitivity of the sensors on site as the sensitivity of the motion sensor decreases the higher up it is mounted.

Circuit diagram of Sensors

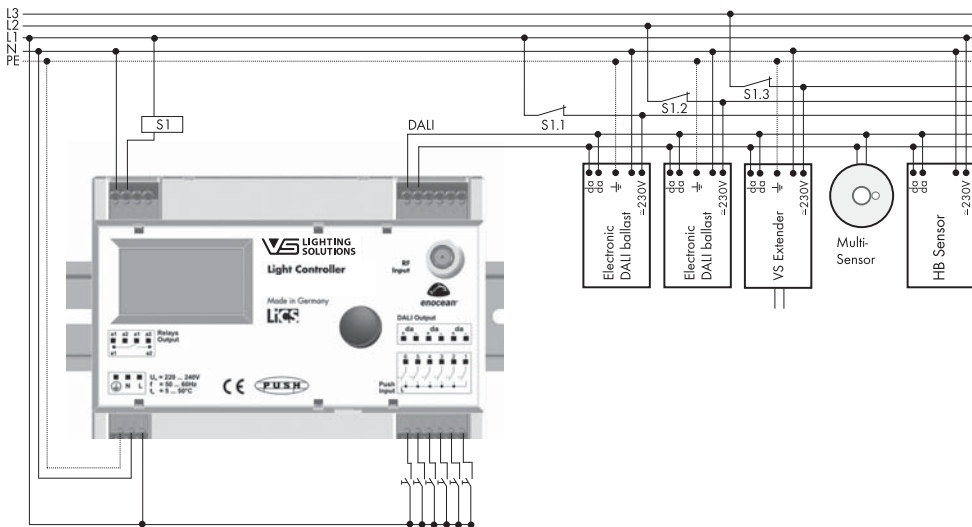

Technical details MultiSensors

MultiSensor	SM-E	FM-E	IL-E
Ref. No.	186320	186321	186322
Control input	DALI in acc. with IEC 62386		
DALI current consumption	4 mA		
Ambient temperature t_a	0 to 50 °C		
Casing temperature t_c	max. 50°C		
Degree of protection	IP20		
Protection class	II		
Weight	30 g		
CE requirements	Safety in acc. with EN 61347-2-11		



MovementSensors HB

Installation MovementSensor HB 65

Prepare the cable accordingly. Open the housing cover and the protective caps for the connections. Thread the connection cables (230 V L, N + DALI control cable) through the protective cap closure and connect with push terminals. Close the protective caps. Before the housing cover is closed, attach the housing with the aid of 4 mm screws in the holes provided. During installation make sure that the sensor component is not touched.

Installation position: any

Installation instructions




- To protect the device, please use a Type B circuit breaker (10 A or 16 A).
 - Conductor cross-section of all terminals: 0.5-1.5 mm² for both rigid and flexible conductors
 - Preparation of the sensor cables (see on the right)
 - As a standard DALI bus is not SELV-compliant, cables must be rated for mains voltage.
 - The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using NYM 5x1.5 mm².
- Please observe the maximum lengths of the DALI bus during installation:

	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	180 m	130 m	80 m

- The sensor must never be placed inside a luminaire.
- The sensor must be installed with a clearance of 1 m to the respective luminaire.

Additional information


- VS HB sensors can only be operated in combination with a VS Light Controller from the LiCS indoor range.
- Please refer to the controller manual for exact instructions on how to configure the sensor.
- To ensure safe operation of the sensors, the maximum permitted ambient temperature must not be exceeded.
- The sensor must be positioned to ensure its reception range is not obstructed by objects, furniture, etc.
- Moving objects e.g. fans may be enough to lead to movement detection.
- See Fig. 1 to 3 for detection range.

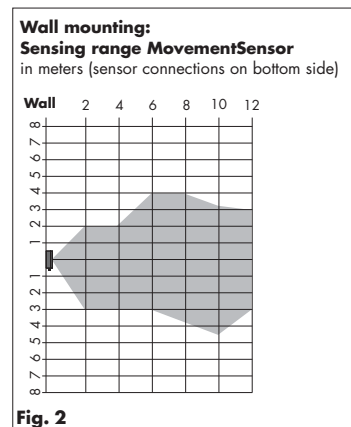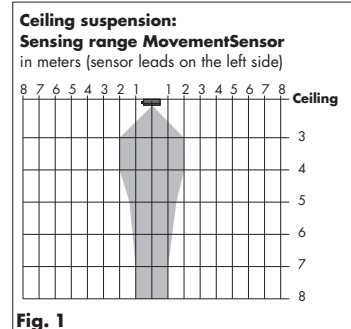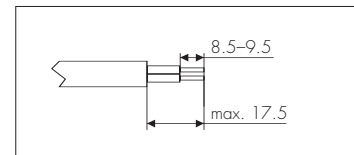

Distance	Sensing Range of MovementSensors Wall	Sensing Range of MovementSensors Ceiling
4 m		
6 m		
8 m		
10 m		—
12 m		—

Fig. 3

Circuit diagram of MovementSensors HB

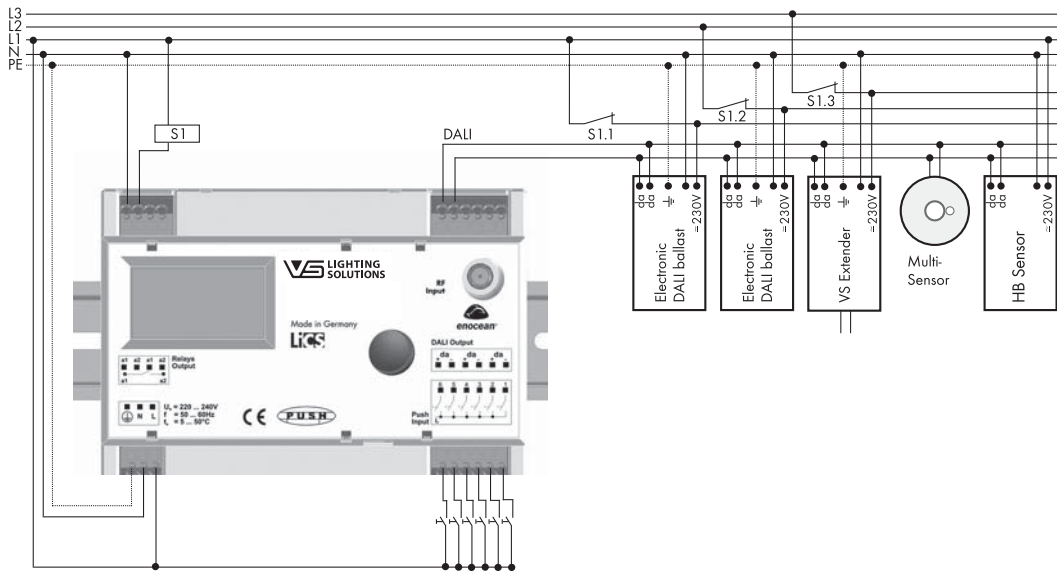

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Technical details MovementSensors HB

	MovementSensor HB 65
Ref. No.	186311
Control input	DALI in acc. with IEC 62386
DALI current consumption	2 mA
Ambient temperature t_a	-5 to 50 °C
Degree of protection	IP65
Protection class	II
Weight	151 g
CE requirements	Safety in acc. with EN 61347-1 and EN 61347-2-11



BrightnessSensors IP65

Installation BrightnessSensors IP65

Prepare the cable accordingly. Open the housing cover and the protective caps for the connections. Thread the connection cables (DALI control cable) through the protective cap closure and connect with push terminals. Close the protective caps. Before the housing cover is closed, attach the housing with the aid of 4 mm screws in the holes provided. During installation make sure that the sensor component is not touched.


Installation position: any

Installation instructions

- Conductor cross-section of all terminals: 0.5–1.5 mm² for both rigid and flexible conductors
- Preparation of the sensor cables (see Fig. 1)
- As a standard DALI bus is not SELV-compliant, cables must be rated for mains voltage.
- The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using NYM 5x1.5 mm².

Please observe the maximum lengths of the DALI bus during installation:


	1.5 mm ²	1 mm ²	0.75 mm ²	0.5 mm ²
6.2 Ω max.	300 m	180 m	130 m	80 m



Additional information

- VS sensors can only be operated in combination with a VS Light Controller from the LiCS indoor range.
- Please refer to the controller manual for exact instructions on how to configure the sensor:
www.vossloh-schwabe.com
- To ensure safe operation of the sensors, the maximum permitted ambient temperature must not be exceeded.
- Installation location: the sensor must detect the differences in the artificial light.

Circuit diagram of BrightnessSensors IP65

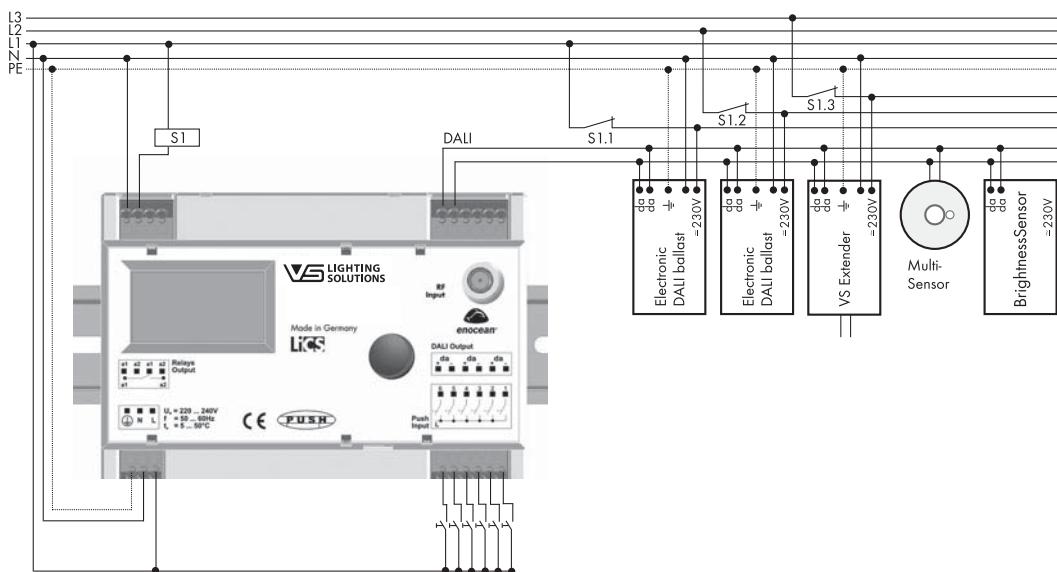

Technical details BrightnessSensors IP65

BrightnessSensor	IP65
Ref. No.	186370
Control input	DALI in acc. with IEC 62386
DALI current consumption	4 mA
Ambient temperature t_a	-5 to 50 °C
Degree of protection	IP65
Protection class	II
Weight	140 g
CE requirements	Safety in acc. with EN 61347-1 and EN 61347-2-11

1

2

3

4

5

6

7

8

9

10

11

12



ECO-FRIENDLY AND ECONOMICAL LIGHTING

Many street lighting facilities are outdated and are therefore highly inefficient. This not only results in higher energy requirements, but also more maintenance work and higher investment costs. All this adds up to street lighting accounting for approx. 30-50% of the entire power consumption recorded by municipal and other types of local authority – which amounts to a huge cost factor for public budgets to cover.

The lighting solutions provided by Vossloh-Schwabe ensure that local authorities can save energy, achieve sustainable cost reductions and at the same time make a valuable contribution to reducing CO₂ output. Using various lighting situations as examples, energy savings of up to 80% can be achieved.

Vossloh-Schwabe's light management systems enable centralised control of individual luminaires with the advantage of a constant online link and the ability to monitor the lighting system. But these intelligent, multifunctional VS controllers provide the same savings potential and high flexibility even without online connectivity.

Typical applications

- General lighting in public spaces
- Lighting in the vicinity of buildings
- Lighting in tunnels
- Lighting for sports' venues
- Industrial lighting





- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

Targeted use of light and optimisation of maintenance processes


Vossloh-Schwabe's LiCS Outdoor system makes it possible to dim individual luminaires or entire luminaire groups. Depending on the requirements, the degree to which the lighting level is dimmed can be sensor-controlled or can comply with a preset level; the burn-in periods of discharge lamps can also be taken into consideration.

Considerable savings potential can be harnessed by need-driven programming and/or lighting control. Thanks to the system's convenient remote monitoring functions, it is possible to optimise maintenance processes as well as better plan maintenance work and budget for it in more detail.

Flexible structure

The complete LiCS Outdoor system is suitable both for new installations as well as for classic retrofits. The particularly flat designs of the controllers enable installation in almost all luminaires, especially luminaires featuring LED technology.

The system enables control of luminaires operated with magnetic ballasts as well as luminaires with up to four dimmable electronic ballasts with a 1-10 V or DALI interface.

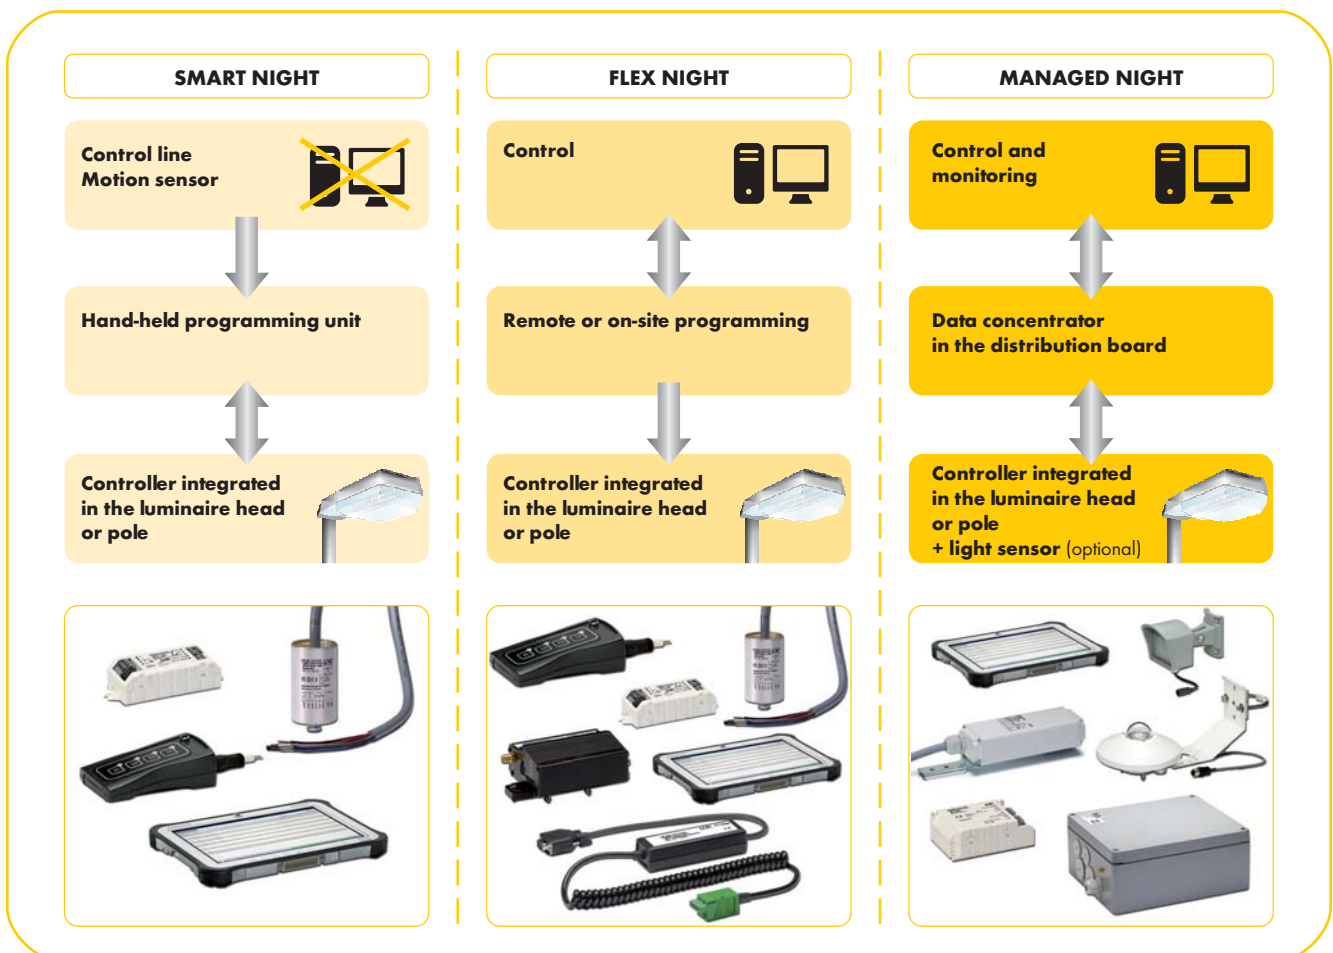

Lighting Control System for Outdoor Applications




Vossloh-Schwabe's LiCS Outdoor System is based on mature system technology that has already proved itself in millions of applications around the world in the most diverse of areas.

Overview of functions

Independent functions form an integral part of the LiCS Outdoor controller and are common to almost all products. The parameters of these functions can be (re)set at any time by the customer using various tools or via the power-line carrier network.


DOO (Dimmed ON/OFF)

Lighting can be faded up to the desired brightness level after being switched on and can also be faded down before being switched off; the duration of the fade-in/-out can be set to suit.

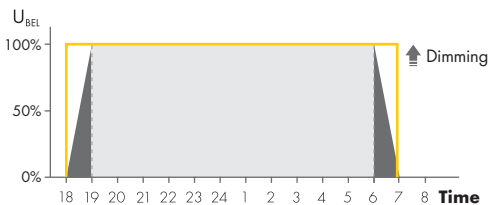

DPC (Delayed Switching for Pedestrian Crossing)

Delayed switching on and/or earlier switching off of lighting in the vicinity of pedestrian crossings.

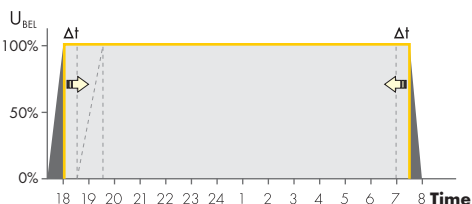


BBT (Burn-in Block Time)

Adjustable dimming block for conventional light sources (discharge lamps) to prevent the lamp from being dimmed during its burn-in period (function can later be deactivated again).


MFF (Maintenance Factor Function)

With prolonged service life, light sources suffer a decrease in luminous flux and, as a result, in brightness. But thanks to the maintenance factor function, this can be compensated by the light management system so as to ensure luminous flux remains stable over the lamp's service life and, additionally, save energy. The flux reduction curve can be adjusted to the real luminous flux reduction by 3 support points.

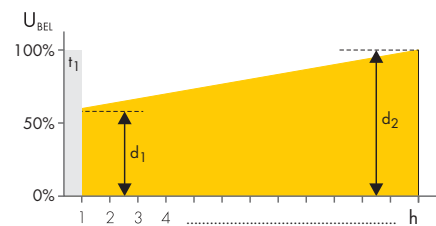

ISD (Intelligent Switching Time Dimming)

During any one night phase, brightness and with that the output of the lighting system can be altered or the luminaire can be switched on/off up to a maximum of 10 times.

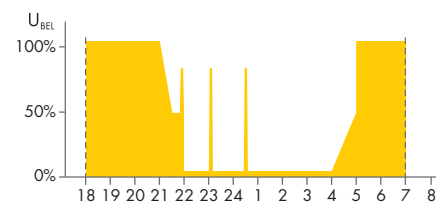

Lst (Control input)

In addition, using a control input (e.g. with a push button or motionsensor) the system can be switched to a certain lighting level for a freely configurable period of time.

RCR (Ripple Control Receiver)

Sound frequency reception module for typical sound frequencies of 100 Hz to 1.7 kHz; TFR protocols on request.

Smart Night

Independent, pre-programmed controllers are used for lighting control purposes. These controllers can also be individually reconfigured at a later point in time. In this regard, up to 4 lighting profiles can be transferred to the hand-held control unit and then transferred to each individual controller on site. In this case, data transfer is purely unidirectional.

iMCU - intelligent Multifunctional Controller Unit	264
iCTI - intelligent Configuration Tool	265
iCTI-USB - intelligent Configuration Tool with USB interface	265

Flex Night

New lighting profiles can be transferred to several iMCU-series controllers at the same time. All iMCUs that are installed on the same supply line are then programmed with a new profile, while still allowing individual iMCUs to be excluded from receiving the new profile.

This can be achieved on site using a laptop and the iCTT, or using the iCTT connection at the control point of the street lighting or, remotely, using the iMICO, in which case the iMICO controller would be firmly installed at the control point.

iCTT - intelligent configuration technician tool	266
iMICO - intelligent MidNight controller	267
iSITE MidNight - system software	268
iMCU - intelligent Multifunctional Controller Unit	264
iCTI - intelligent Configuration Tool	265
iCTI-USB - intelligent Configuration Tool with USB interface	265

Managed Night

Power-line technology enables bidirectional data transfer using the 230 V supply line. As a result, controllers can be grouped together to form a high-performance network using just the cables provided (**without needing any additional control lines**) in almost any environment.

Data can thus be transferred to each controller connected to the network with a very high degree of reliability; if necessary, signal strength is automatically boosted, thus removing any restrictions in terms of distance.

iLC - intelligent luminaire controller (built-in)	269
iPC - intelligent pole controller	270
iDC - intelligent data concentrator	271
iCT - intelligent configuration software for iDC	271
iLUX - intelligent lux meter with a power-line carrier interface	272
iPL-NI - power-line network interface	272
iCCU - intelligent, capacitive coupling unit	272
iBRIDGE - wireless bridge	273
iLIC - intelligent luminaire information centre	274
iOPC - intelligent OPC DA Server	274

Accessories

iHFS - intelligent high-frequency sensor	275
iSCT - intelligent tablet PC	276

1

2

3

4

5

6

7

8

9

10

11

12

iMCU – intelligent Multifunctional Controller Units

For outdoor luminaire control

These light controllers were specifically designed for independent operation to enable control of street lighting or lighting close to buildings.

Depending on the given task, the product can replace one or more individual products. The controllers are suitable for use with almost all electronic ballasts and LED drivers with a DALI or a 1-10 Volt interface. They also enable control of conventional magnetic ballasts that are with coil tapping points without needing any other components.

The control input LST can be used to connect a control phase, a motion detector, a key switch or a light sensor, but can also be used to receive simple data protocols.

Technical notes

- Control output: DALI, 1-10 V or PWM for max. 1 EB, short-circuit-proof
- Relay contacts: potential-free (input, opener, closing contact)
- Storage temperature: -25 to 85 °C
- Operating temperature: -25 to 80 °C
- Humidity: non-condensing
- Degree of protection: IP20 or IP67
- Upgradeable firmware

Galvanic isolation

The electronic ballast does not feature potential isolation between input and output: as soon as the electronic ballast is connected to the controller, the control input of the electronic ballast is not potential-free.


Typical applications

Street lighting or lighting in the vicinity of buildings


- DPC
- MFF
- ISD
- DOO
- BBT
- LST
- RCR
- (s. p. 262)



IP20 version

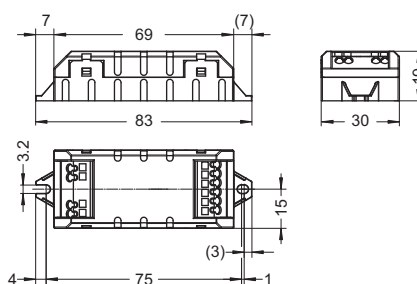

IP67 version

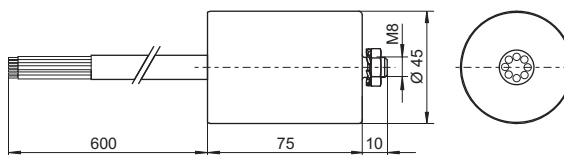

Type	Ref. No.	Voltage AC V, Hz	Power consumption mW	Control input LST V	Switching current A ($\lambda = 0.8$)	Connection	Weight g
IP20 – Dimensions (LxWxH): 83x30x19 mm							
iMCU IP20	186232	220-230, 50	< 500	230	4	Push-in terminals: 0.5-1.5 mm ²	30
iMCU IP20	186558	220-230, 60	< 500	230	4	Push-in terminals: 0.5-1.5 mm ²	30
IP67 – Dimensions (LxØ): 85x45 mm							
iMCU IP67	186338	220-230, 50	< 500	230	4	9-core lead, 600 mm	250
iMCU IP67	186559	220-230, 60	< 500	230	4	9-core lead, 600 mm	250

iCTI – intelligent Hand-held Operating Device

For subsequent controller configuration

The iCTI features 4 memory cells for different lighting situations.

Standard connection: USB 2

OS: upgradeable firmware

The continually updated programming software can be downloaded at www.vossloh-schwabe.com

Dimensions (LxWxH): 180x65x40 mm

Weight: 0.2 kg

Ref. No.: 186246




For subsequent controller configuration especially for luminaire manufacturing and maintenance

Standard connection: USB 2

OS: upgradeable firmware

The continually updated programming software can be downloaded at www.vossloh-schwabe.com

Ref. No.: 186392 iCTI-USB

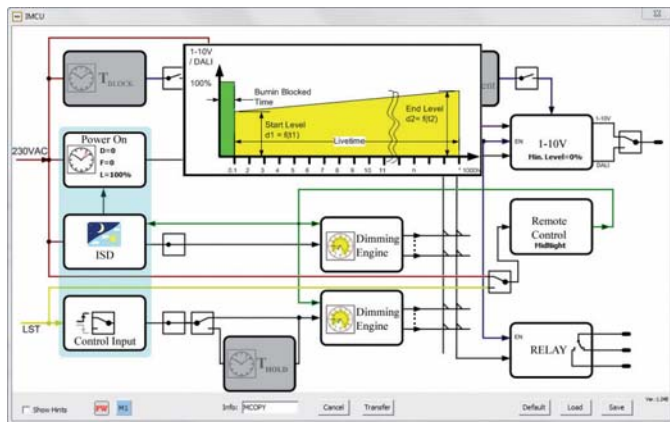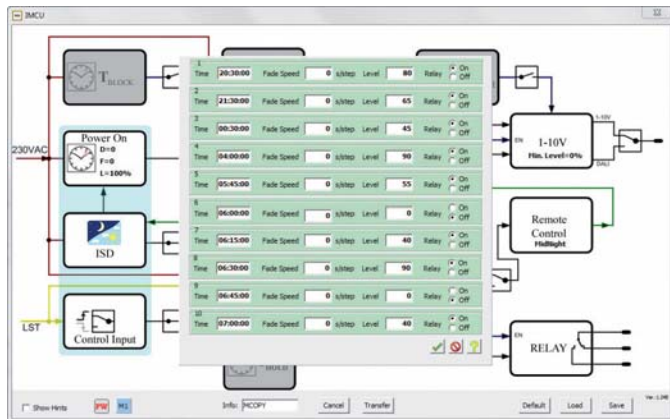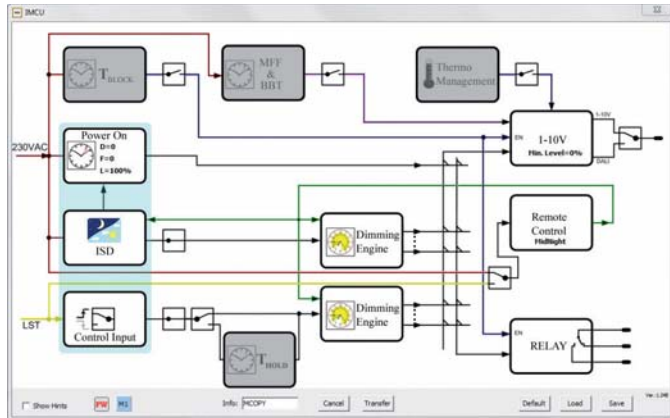

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

iCTT – intelligent Configuration Technician Tool

For subsequent configuration of lighting scenes

The push-in terminal delivered along with this portable configuration tool is located on a DIN rail (top-hat section) in the distribution board and is connected to the lighting circuit.

Reconfiguring lighting scenes at a later point in time involves using the push-in terminal and the iCTT's connector to make a connection to a laptop or PC. The MidNight Configurator software is then used to adjust the relevant settings and transfer these new values to the lighting system.

Once the configuration process has been completed, the iCTT is disconnected again and the protective cover of the push-in terminal is replaced.

Technical notes

Portable use

Dimensions (LxWxH): 114x36.5x25.5 mm

Connection to the lighting system:

Push-in terminal with protection cover: MSTB 2.5/4-ST-5.08

Plug: MSTBVK 2.5/4-G-5.08



Connection to a laptop/PC:

RS-232 One DB9 male (Standard EIA),

Operating temperature: -20 to 70 °C

Humidity: 5-90% RH at max. 50 °C

Degree of protection: IP20

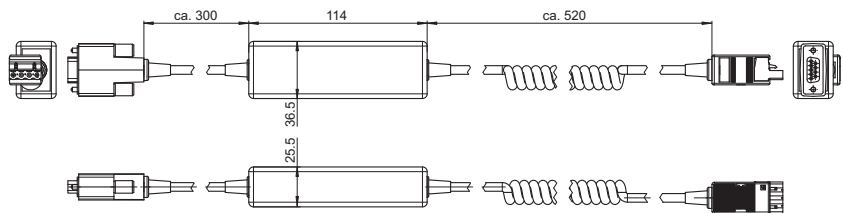

Type	Ref. No.	Voltage AC V, Hz	Power consumption mW	Control input L _{ST} V	Switching current A (λ = 0.8)	Weight g
iCTT	186241	220-230, 50	< 500	230	4	250
iCTT Terminal Block	186391	Terminal block for iCTT				

iMICO – intelligent Multifunctional Controller Units

For outdoor luminaire control

By installing the iMICO in a street-side distribution board and using the MidNight function, it is possible to update the lighting profiles of an iMCU controller or of a dimmable electronic ballast from a central location without needing to install any additional wiring in the street.

This function is typically used in cases that require the lighting profile to be changed several times per year or if it needs to remain possible to deactivate dimmed output periods of a city's lighting system in a targeted manner, e.g. during city festivals or other events.

The web-based iMICO works on the iSITE web platform. To reconfigure a lighting profile, the server sends a text message to the iMICO via the mobile phone network. The iMICO then transfers the new configuration to the connected controllers or Mid-Night electronic ballasts by switching the mains phase or another free phase on and off. These controllers will even prevent any flickering in luminaires during signal transfer.

Technical notes

Operating temperature: -20 to 50 °C

Storage temperature: -25 to 75 °C

Humidity during operation: 5-75%

Protection class I

1 relay contact: potential-free (input, opener, closing contact)

Material: aluminium AlSi12 (Fe)

Drill holes for cables for iMICO-BI:

2 PG metric fittings (25x1.5 mm)

2 PG metric fittings (32x1.5 mm)

1 PG metric fittings (20x1.5 mm)

1 fixing hole for antenna connection

Interfaces

Transmission: mobile phone network, requires

Quad band SIM card

Protocols: SMS, GPRS

Internal modem: Telit 862



Internal and external antenna: MMCX



iMICO BI – incl. transformer and relay, completely pre-wired



iMICO – single controller without transformer and relay

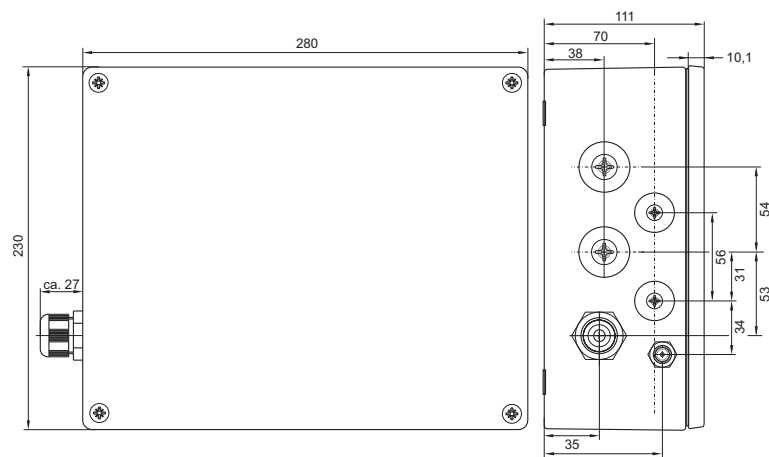

Type	Ref. No.	Voltage AC V, Hz	Max. switching output A/V	Overtoltage protection kV	Degree of protection	Dimensions (LxWxH) mm	Weight g
iMICO-BI	186250	220-230, 50	16/250	4	IP65	280x230x111	4400
iMICO	186240	220-230, 50	–	2	IP20	83x64x32	450

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

iSITE MidNight – intelligent Configuration Software


For programming lighting situations using iMICO

iSITE can be accessed using any PC with an internet browser (preferably Google Chrome) and was developed to configure the iMICO controller.

This convenient and quick method enables all luminaires to be reprogrammed with new lighting profiles. The server-based supports Windows Server operating systems. The following actions can be controlled using the software:

- Creating various timer programs
- Group allocation of various iMICOs
- Assignment of groups and timer programs
- Graphic representation (maps) showing the positions of luminaires and iMICOs
- Sending text messages to groups or to individual iMICOs to transfer settings
- Generating notifications (text messages) to confirm that settings were successfully transmitted

Ref. No.: 186244

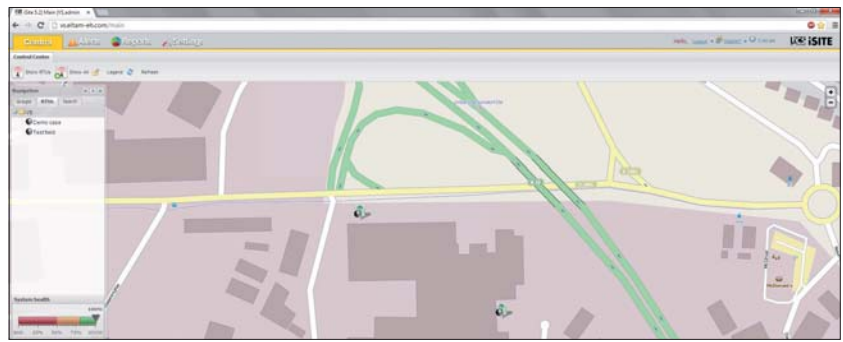

Device Data	Type	Quantity	Device Code	Address	Status
LED	LED	1	100001	100001	Active
LED	LED	2	100002	100002	Active
LED	LED	1	100003	100003	Active
LED	LED	2	100004	100004	Active
LED	LED	1	100005	100005	Active
LED	LED	1	100006	100006	Active

System requirements

- Memory RAM: 4GB
- Memory HD: 2TB
- CPU: min. Dual Core, depending on the scope of the project
- Operating system: Windows server
- Data security: min. RAID 1 recommended RAID 5

iLC – intelligent Luminaire Controller (built-in)

Vossloh-Schwabe's light control units of the "Managed Night" series work with power-line communication using the C/B CENELEC band. Communication occurs in accordance with standardised directives EN 14908-1, EN 14908-3 and the Lonmark® OLC profile (outdoor luminaire controller profile).

iLC can be used as independent control unit in a light management system. The controller is integrated into a LON power-line light management system that requires a network connection to a central module (iDC).

Once installed in a light management system, the controller delivers various performance data and status reports, for example voltage, current, power factor, energy consumption, lighting hours and temperature. Limits must be defined for each measured value, which are then monitored in the controller with a report being transmitted to the master system if limits are exceeded. As a result, the controller itself already intelligently monitors the luminaire. The calibrated performance data are available within a tolerance of 1 %.

Technical notes

- Dimensions (LxVxH): 93x58x29 mm
- Control output: DALI or 1-10 V for max. 4 EBs, short-circuit-proof
- Bistable relay output: closing contact
- Low-voltage control input: 1 x 5 V DC for sensors with "open collector" output or potential-free relay
- Connection terminals: 0.5-1.5 mm²
- Storage temperature: -25 to 85 °C
- Operating temperature: -25 to 80 °C
- Humidity: non-condensing
- Degree of protection: IP20



iLC – intelligent Luminaire Controller (built-in)


Control input LST can be used for a control phase, a motion detector, a key switch, a light sensor or, if operated independently, to receive simple protocols.

Galvanic isolation

The electronic ballast does not feature potential isolation between input and output: as soon as the electronic ballast is connected to the controller, the control input of the electronic ballast is not potential-free.

Typical applications

- Lighting for public spaces
- Lighting in the vicinity of buildings
- Lighting for tunnels



- DPC
- MFF
- ISD
- DOO
- BBT
- LST
- RCR
- (s. p. 262)

Type	Ref. No.	Voltage AC V, 50 Hz	Power consumption W	Control input LST V	Switching output V	Switching current A (λ = 0.8)	Weight g
iLC	186233	110-250	< 1	230	230	4	100

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

iPC – intelligent Pole Controller

This light controller was developed for installation in a luminaire pole and features the same functions (and in full scope) as the iLC Controller on page 269.

Technical notes

Dimensions (LxWxH): 227.2 x 59 x 37.6 mm
 Control output: DALI or 1-10 V for max. 4 EBs, short-circuit-proof
 Bistable relay output: closing contact
 Control output ECO ballast: 10 mA for power reduction relays
 Connection cable: 1 m (special configurations are available on request)
 Storage temperature: -25 to 85 °C
 Operating temperature: -25 to 80 °C
 Humidity: non-condensing
 Degree of protection: IP67

Galvanic isolation


The electronic ballast does not feature potential isolation between input and output: as soon as the electronic ballast is connected to the controller, the control input of the electronic ballast is not potential-free.

Typical applications

Lighting for public spaces
 Lighting in the vicinity of buildings



iPC – intelligent Pole Controller

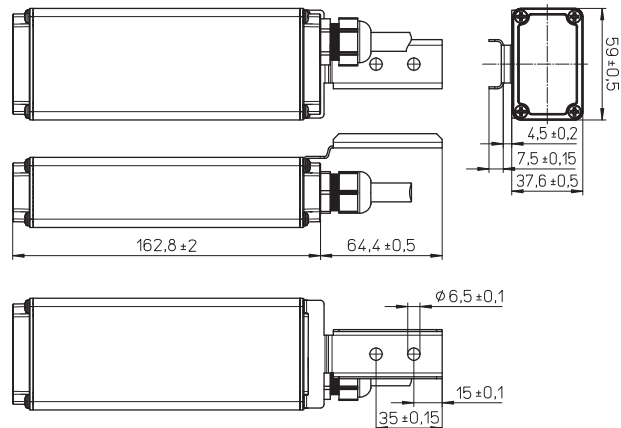

- DPC
- MFF
- ISD
- DOO
- BBT
- LST
- RCR
- (s. p. 262)

Type	Suitable for	Ref. No.	Voltage AC V, 50 Hz	Power consumption W	Control input LST V	Switching output* V	Switching current A (λ = 0.8)	Weight g
iPC	Controller	186234	110-230	< 1	230	230	4	360
iPC-Lux	iLUX light sensors	186235	110-230	< 1	230	230	4	360
iPC-RC	ripple-control sound frequency**	186236	110-230	< 1	230	230	4	360
iPC-HFS	iHFS high frequency sensor	186357	110-230	< 1	230	230	4	360

** Protocols on request

* Optionally available with a second switching output on request

iDC – intelligent Data Concentrator

The iDC forms the master of the "Managed Night" light management system and functions as the central connection interface to the software of the master system. The iDC can be programmed and also features application programs that are perfect for controlling lighting systems.

The following functions are an integral part of the product: timer programs, monitoring of limit values plus alarm function and alarm transmission, data conversion, data logging and email client.

Fitted with various interfaces such as SO for counter registration, the M bus for remote counter reading or the MOD bus for extended sensor and actuating functions, the iDC can adapt to suit almost any control task.

Technical notes

Dimensions (BxHxT): 280x230x111 mm

Material: aluminium AlSi12 (Fe)

Drill holes for cables:

2 PG metric fittings (25x1.5 mm)

2 PG metric fittings (32x1.5 mm)

1 PG metric fittings (20x1.5 mm)

1 fixing hole for antenna connection

Interfaces for power-line carriers

Inputs: 2 digital inputs 30 V DC

Optionally extendable using a cut-off relay for

230 V AC: 2 impulse-counter inputs typ. of SO

Outputs: 2 relay outputs 230 V AC; 10 A

Ethernet Port 10/100BaseT, auto-selecting,

RS232 Interface for GSM/GPRS modem,

for up to 200 controllers

LON power-line carrier communication:

Protocols: in acc. with ANSI CEA 709.1 / EN 14908-1

on the supply voltage (tri/single phase)

Transmission: in acc. with ANSI CEA 709.3 / EN 14908-3

IP communication: XML / SOAP, http, FTP, UDP

FME antenna connection: Male

Storage temperature: -25 to 85 °C

Operating temperature: -25 to 60 °C

Humidity: non-condensing

Degree of protection: IP65, Protection class I




iDC – intelligent Data Concentrator

The iDC also provides a very well documented, web-based XML/SOAP interface or an optionally available OPC driver (open process control) to the SCADA (Supervisory Control and Data Acquisition) system. This makes it possible to integrate the iDC also into any BA (Building Automation) or control system.

The iLIC software was specifically developed to enable control of the iDC. Various extension options are available to suit common communication requirements: GPRS...G3, IP (CAT5), Fibre optic (FO) Single Mode, Fibre optic (FO) Multi Mode, and optionally also WLAN on request.

iCT – intelligent Configuration Software

- Specifically developed for commissioning an iDC
- Convenient and quick installation of all controllers in a network segment
- Quick commissioning thanks to clear identification of every controller with a barcode (scanner optional)
- The controller is configured in accordance with OLC-Lonmark® conventions

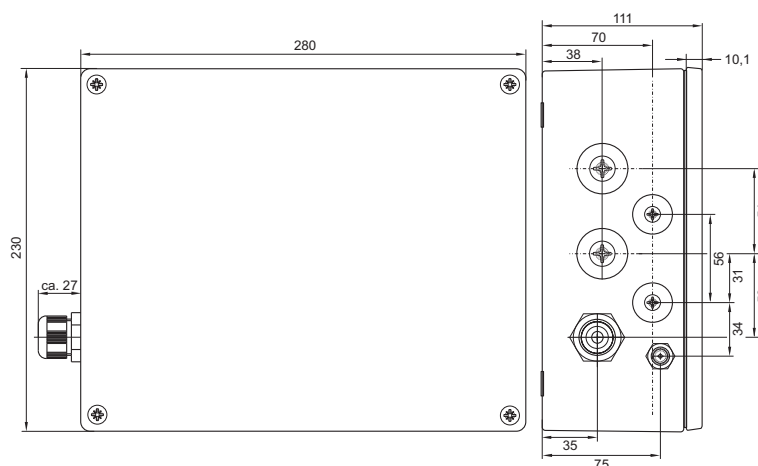

Type	Ref. No.	Voltage AC V, Hz	Average power consumption W	Transmission mode VA	Weight g
iDC-GPRS.3G	186230	230±10%, 50±1%	7	12	4400
iDC-IP	186237	230±10%, 50±1%	6.5	12	4400
iDC-R	186546	230±10%, 50±1%	7	12	4400
iDC-FO-MM	186238	230±10%, 50±1%	7	12	4400
iDC-FO-SM	186239	230±10%, 50±1%	7	12	4400
iCT	186242	iDC commissioning software; the software can only be delivered along with the iDC and must be ordered separately.			
iLIC	186243	Software for visualizing; Operating system: independent (Linux derivate and Microsoft)			
iOPC	186...	Software for integration into the BA (Building Automation) (see page 273)			

iLUX – intelligent Lux Meter with Power-line Interface

The high-quality light sensor directly measures and delivers digital light metrics in lux to a light management system for the purpose of lighting control.

Lighting systems operated with or without a light management system can be switched on or off at a specific lux value via internal relays. The measured lux values can then be transmitted to the lighting system via the power-line. Depending on the respective lighting level required in each case, it is therefore possible to independently control luminaires in different areas, e.g. at major and minor roads, pedestrian crossings and in parks.


The compact sensor can be fixed to the luminaire pole or a wall using the enclosed mounting bracket.

Technical notes

- Sensor casing: aluminium with a PC cover, sensor unit protected by opal glass
- Connection cable to the controller: 10 m (special configurations available on request)
- Storage temperature: -25 to 85 °C
- Operating temperature: -25 to 80 °C
- Humidity: non-condensing
- Degree of protection: IP65
- Weight of mounting bracket: 300 g
- Casing and connection details of the iPC controller (intended for installation in luminaire poles), see page 270

Typical applications

- Lighting for public spaces
- Lighting in the vicinity of buildings

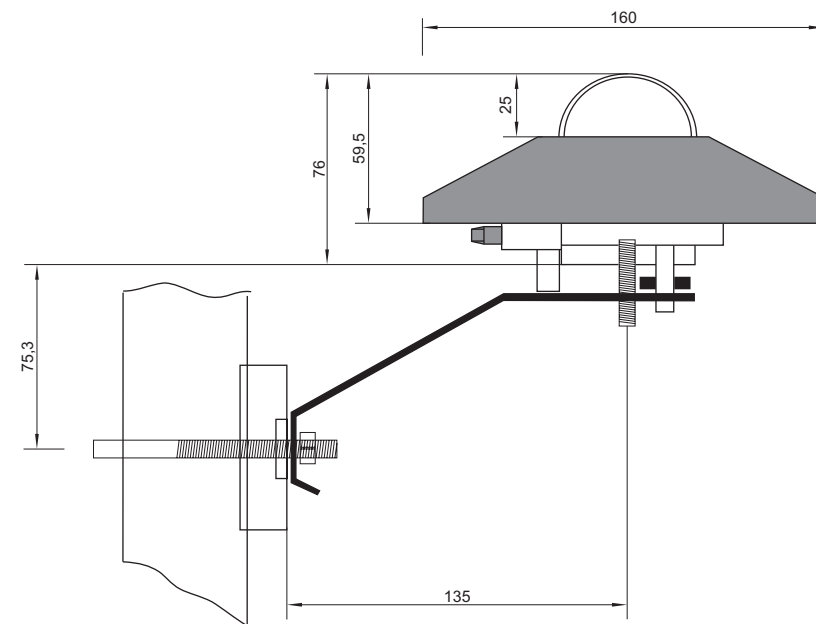

Type	Ref. No.	Note	Weight g
iLUX	186231	Use only in combination with iPC-LUX (Ref. No.: 186235)	1000

iPL-NI Power-line Network Interface

- For subsequent iLUX configuration without network operation
- Data communication: notebook / PC and iLUX using a 230 V AC power supply cable
- Operating system: XP and higher
- For parameter configuration and firmware updates
- Ref. No.: 186265**



iCCU – intelligent, Capacitive Coupling Unit

Intelligent, capacitive coupling unit for power-line communication.
 Power-line signals are transferred using the B/C frequency range in acc. with Cenelec specifications. The unit is suitable for direct installation without requiring configuration and is transparent for data transfer purposes. The unit draws no power when operated in standby mode.
 No software-based configuration required
 Connection with an NH fuse possible on request

Technical notes

Casing: PC
 Dimensions (LxWxH): 180x94x60 mm
 Mains voltage: 230 V AC $\pm 10\%$, 50 Hz
 Power consumption: 0.0 W
 Leads: High-voltage silicone cable, stranded conductors 1 mm², length: 80 mm
 Storage temperature: -25 to 85 °C
 Operating temperature: -25 to 65 °C
 Degree of protection: IP65, Protection class I
 Weight: 770 g
 Resistance against surge voltage: 3 kV


Ref. No.: 186345



iCCU – Capacitive Coupling Unit

Typical applications

Lighting for public spaces, street lighting
 Lighting in the vicinity of buildings
 Company premises, warehouses, sports facilities

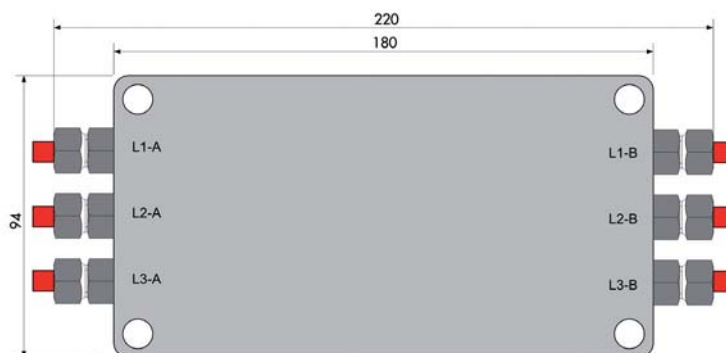

iBRIDGE – intelligent Wireless Bridge

For wireless signal transfer

iBRIDGE enables wireless transfer of control signals of the power-line network to adjacent lighting circuits without requiring a cable connection.

This makes it possible to jointly control several smaller, independent circuits within a larger lighting network and serves to reduce the number of required iDCs (data concentrators) since a larger number of controllers can be configured using a single iDC.

Sections of the lighting cable that are not suitable for power-line communication due to severe local interference can also be bridged using iBRIDGE.

Just like a controller, iBRIDGE is commissioned using the light management system and does not require any special software installation.



iBRIDGE

Technical notes

Dimensions (ØxH): 105x120 mm
 Mains voltage: 120-277 V AC $\pm 10\%$
 Mains frequency: 50-60 Hz
 Wireless frequency: 2.4 GHz
 Power-line communication frequency: Dual 115 kb/s and 132 kb/s
 Wireless output: 10 mW
 Operating temperature: -40 to 85 °C
 Humidity during the operation: non-condensing
 Connection: in acc. with NEMA Socket Standard BS5972
 Degree of protection: IP66
 Weight: 190 g

Ref. No.: 186275

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

iLIC – intelligent Luminaire Information Centre

For outdoor luminaire control

The luminaire information centre is the central control instrument of a light management system. All connected luminaires can be controlled, monitored and displayed using a web-based server application.

The server-based software supports both Windows and Linux operating systems. Firefox or Internet Explorer are the frontend applications to operate, control or display the light management system. The following actions can be controlled via the software:

- Switching individual luminaires on or off ahead of defined luminaire groups
- Defining the most diverse timer settings
- Evaluation and display of the lighting system status depending on various types of error message
- Evaluation of energy consumption at individual luminaire and luminaire-group level
- Graphic display of all acquired data over time (voltage, current, power, temperature, power factor, lighting hours, ...)

Ref. No.: 186243

Based on the software design, the lighting system displays information as a tree-like structure showing city, suburb, street, luminaire or can be broken down according to other criteria. The multi-client software also makes it possible to restrict rights and functions for different people or groups of people depending on their level of authorisation.

As the software is a wholly web-based application, system maintenance can be carried out via the web (global) or can be restricted to just the company using its LAN network, all depending on the system structure. Numerous users can access the system at the same time. Optional interfaces are also available to connect to other asset management systems.

System requirements

- Server: state-of-the-art
- Memory RAM: 4GB
Memory HD: 2TB
- CPU: min. Dual Core, depending on the scope of the project
- Operating system: XP, Windows 7, Linux, Distribution, VM operation is possible
- Data security: min. RAID 1 recommended RAID 5



iOPC – intelligent OPC DA Server

iOPC DA Server for connecting iDCs to typical control technology systems

The iOPC Server is used to integrate iDCs into standardised SCADA/control technology systems. The software runs on Microsoft® operating systems and provides a standard interface for integrating data points.


OPC DA specification: DA 2.05

Type: iOPC 1.001 Tool

Ref. No.: 186358 for max. 3 iDC

Ref. No.: 186359 for max. 10 iDC

Ref. No.: 186385 for max. 20 iDC

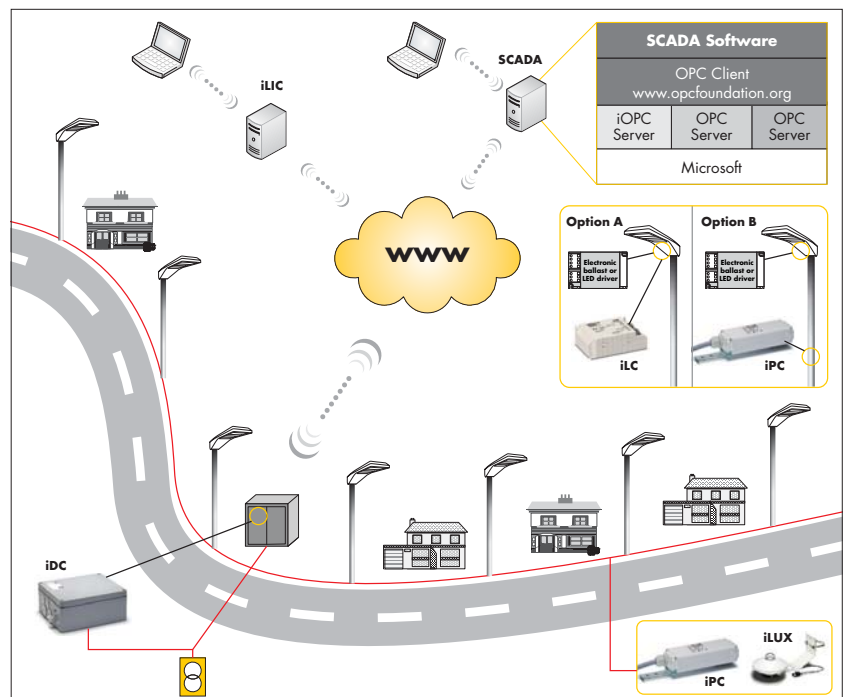

iHFS – intelligent High-Frequency Sensor

Motion sensor for street lighting

The iHFS enables energy-efficient and need-driven control of street lighting and lighting in the vicinity of buildings using intelligent high-frequency-based object detection. The sensor system functions reliably at all times irrespective of light and weather conditions.

The iHFS is available as a modular and an integrated system. With the modular version, up to 3 sensor modules can be attached to the luminaire pole, which enables simultaneous detection of objects from different directions. The detection field can be individually defined via the sensor's mounting angle.

With the integrated version, one sensor is typically mounted per luminaire. The sensor is installed directly in the luminaire.

Technical notes

For Light Controller iPC-HFS (s. p. 270)

Dimensions (LxWxH): 83x75x67 mm
plus holder

Operating temperature: -20 to 70 °C

HF technology: 5.8 GHz

Cable length: 10 m



iHFS


Installation

The sensors are attached to the luminaire pole using stainless steel tension bands (included in the scope of delivery). The direction of a sensor's detection field can be individually adjusted via the swivel-head holder.

Type	Note	Ref. No.	Power consumption W	Reach	Opening angle
iHFS-120 1	Sensor	186253	0.7-1.5 (1-3 sensors)	up to 22 m	120°

Sensor for built-in into luminaires on request.

Detection area

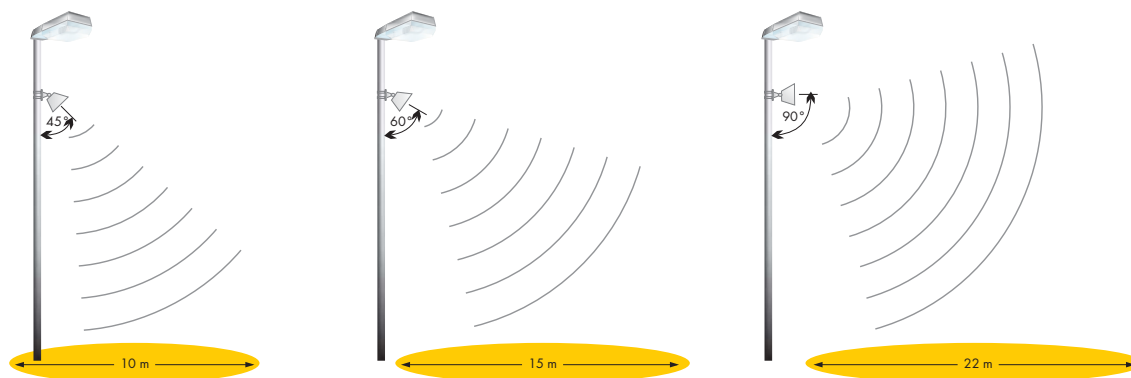

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

iSCT – intelligent Software Configurations Tool

The Managed Night power-line system as well as the two Smart and Flex Night systems can be controlled using the extremely robust tablet PC made by Panasonic and the associated software.

Panasonic toughpad FZ-G1 for software configuration

- Full-ruggedized Windows 8 Tablet
- Intel® Core™ i5-3437U vPro processor
- Windows 8 Pro, Intel HD 4000 Graphic
- Daylight-readable 10,1" WUXGA outdoor display with IPSa technology (1920 x 1200) with up to 800 cd/m²
- Capacitive 10-point multi-touch screen and digitizer
- Standard connections: USB 3.0, HDMI and headphones
- Pre-configurable port (serial, LAN, microSD or USB 2.0)
- Up to 8 hours of battery life; battery can be changed by user
- Protected against water and dust
- Will survive being dropped from a height of up to 120 cm without suffering damage (as tested by Panasonic)
- With preinstalled and configured light management software

Dimensions (LxWxH): 270x188x9 mm

Weight: approx. 1.1 kg

Ref. No.: 186251



Further details can be found under:

business.panasonic.co.uk/computer-product/toughpad/fz-g1

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
142150	196	186177	157	186241	266	186322	244, 255
142170	195	186180	165	186242	271	186323	239, 249
142185	194	186181	204	186243	271, 274	186326	185
142736	190	186189	239, 249	186244	268	186327	185
142737	191	186190	239, 249	186246	265	186338	264
142738	192	186194	243, 254	186250	267	186339	235, 247
142739	191	186195	157	186251	276	186340	235, 247
147230	190	186196	157	186253	275	186341	171
147233	190	186197	157	186265	272	186342	169
147240	192	186204	210	186266	161	186345	273
149800	198	186208	184	186267	161	186348	169
149820	193	186210	241, 253	186268	161	186349	171
149992	197	186211	240	186269	161	186350	171
149993	197	186212	240	186275	273	186351	172
186103	207	186213	240	186276	239, 249	186353	171
186104	207	186216	212	186278	160	186354	149
186105	208	186217	212	186279	159	186355	146
186112	212	186218	207	186280	156	186356	144
186113	212	186219	207	186297	186	186357	270
186114	213	186220	242, 253	186298	186	186358	274
186129	206	186221	157	186299	183	186359	274
186131	207	186222	157	186300	183	186367	174
186132	207	186229	151	186301	186	186370	245, 259
186133	208	186230	271	186302	186	186384	145
186136	203	186231	272	186303	183	186385	274
186138	203	186232	264	186304	183	186391	266
186140	205	186233	269	186305	150	186392	265
186142	205	186234	270	186306	160	186393	164
186144	204	186235	270	186308	156	186394	164
186153	204	186236	270	186311	245, 257	186395	164
186154	204	186237	271	186315	150	186397	178
186155	205	186238	271	186316	176	186398	178
186172	205	186239	271	186320	244, 255	186399	180
186175	182	186240	267	186321	244, 255	186400	175

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
186401	175	186454	187	186516	237	543425	79
186402	175	186455	187	186517	238	543426	203
186406	149	186456	187	186519	166	543427	203
186407	146	186460	145	186522	172	543428	203
186409	149	186463	163	186529	153	543429	203
186410	146	186464	163	186530	153	543430	203
186412	211	186465	155	186531	162	543431	203
186414	154	186476	236	186532	162	544036	79
186415	168	186477	187	186546	271	544038	79
186416	168	186478	187	186548	172	544804	81
186424	165	186479	167	186550	181	544805	81
186425	165	186481	243, 254	186551	181	545029	138
186426	165	186484	235, 247	186552	181	545315	138
186427	165	186485	235, 247	186554	152	545316	138
186428	188	186486	147	186556	158	546370	81
186429	154	186487	147	186558	264	546388	138
186430	172	186488	147	186559	264	546671	75
186431	171	186489	179	186564	143	546673	75
186432	209	186490	177	186565	143	546676	75
186433	209	186491	147	188823	216	546680	75
186434	209	186492	147	188824	215	546684	75
186440	173	186495	216	188827	216	546685	75
186442	173	186496	216	188828	215	546686	75
186443	148	186497	216	529157	82	546687	75
186444	148	186498	215	533815	82	546688	75
186445	142	186499	215	536248	82	546727	77
186446	142	186500	215	536843	204	546729	77
186447	168	186503	155	536977	82	546733	77
186448	168	186507	170	543320	202	546735	77
186449	168	186508	170	543321	202	546736	77
186450	168	186509	178	543322	202	546741	77
186451	168	186510	187	543422	79	546748	77
186452	187	186512	236	543423	79	546749	77
186453	187	186513	236	543424	79	546750	77

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
546755	77	548031	76	548943	129	550898	103
546756	77	548032	76	549585	29	550899	103
546757	77	548088	77	549586	29	550900	103
547510	80	548089	77	549914	126	550901	103
547511	80	548090	77	549915	126	550902	103
547587	80	548179	13, 82	549916	126	550903	103
547588	80	548252	82	549917	126	550904	103
547589	80	548739	81	549992	13	550905	103
547590	80	548781	81	549993	13	550906	103
547591	80	548863	126	549994	29	550907	103
547592	80	548864	126	549995	29	550908	103
547716	78	548868	78	550086	222	550909	103
547717	78	548869	78	550087	222	550912	29
547718	78	548870	78	550382	95	550913	29
547719	78	548871	78	550438	88	550914	29
547726	126	548912	129	550439	88	550915	29
547788	126	548913	129	550440	88	550952	13
547789	126	548915	129	550441	88	550958	95
547790	126	548916	129	550532	200	550959	95
547791	126	548917	129	550533	200	550967	78
547792	126	548919	129	550534	200	550968	78
547793	126	548920	129	550535	200	550969	78
547794	126	548921	129	550880	100	550970	78
547795	126	548923	129	550882	100	550971	78
547796	126	548924	129	550885	100	550972	78
547797	126	548925	129	550886	100	550973	78
547798	126	548927	129	550890	102	550974	78
547799	126	548928	129	550891	102	551039	13
547800	126	548931	129	550892	102	551129	13
547801	126	548932	129	550893	102	551131	13
547802	126	548935	129	550894	102	551132	13
547837	126	548936	129	550895	102	551265	95
547940	126	548939	129	550896	102	551448	95
548030	76	548940	129	550897	102	551588	32

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
551589	32	553219	222	554391	98	554960	87
551590	32	553220	222	554392	98	554961	87
551591	32	553221	222	554393	98	555008	88, 89
551700	200	553422	95	554394	98	555009	88, 89
551983	88	553427	88, 89	554395	98	555010	95
551984	88	553795	93	554396	98	555012	93
551985	88	553820	93	554397	98	555013	98
551986	88	553821	93	554419	98	555014	98
551987	88	553822	93	554535	137	555016	86
551988	88	553823	93	554601	222	555017	86
551989	88	553824	93	554843	133	555019	86
551990	88	553825	93	554845	133	555020	86
551991	88	553826	93	554929	138	555437	16
551992	88	553827	93	554932	201	555438	16
551993	88	553828	93	554933	201	555439	16
551994	88	553829	93	554934	201	555482	16
552015	95	553830	93	554935	201	555875	89
552016	95	553831	93	554936	201	556154	136
552017	95	553981	93	554943	93	556538	30
552018	95	554044	32	554944	93	556539	30
552019	95	554045	32	554945	93	556540	30
552020	95	554046	32	554946	93	556541	30
552021	95	554047	32	554947	93	556640	95
552022	95	554285	36, 40	554948	93	556741	89
552039	88, 89, 93, 95	554286	36, 40	554949	93	556742	89
552088	128	554287	36, 40	554950	93	556743	89
552089	128	554288	36, 40	554951	93	556744	89
552090	128	554289	36, 40	554952	93	556745	89
552091	128	554290	36, 40	554953	93	556746	89
553212	218	554386	97	554954	93	556747	89
553213	218	554387	97	554956	86	556748	89
553214	218	554388	97	554957	86	556749	89
553215	218	554389	97	554958	86	556750	89
553218	222	554390	98	554959	86	556751	89

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
556752	89	557396	30	557822	42	557983	10
556753	89	557397	30	557823	42	557984	10
556755	89	557398	30	557824	42	557985	10
556756	89	557399	30	557825	42	557986	10
556794	219	557400	30	557826	42	557987	10
556795	219	557401	30	557827	42	557990	46
556796	219	557402	30	557828	42	558025	95
556797	219	557403	30	557829	42	558100	10
556798	222	557404	30	557834	94	558101	10
556799	222	557405	30	557835	94	558102	10
556912	11	557406	30	557836	94	558103	10
556926	11	557407	30	557837	94	558104	10
556927	11	557408	30	557838	94	558105	10
556928	11	557409	30	557839	94	558106	10
556929	11	557460	30	557840	94	558229	94
556930	11	557461	30	557841	94	558231	50
556933	12	557462	30	557843	94	558232	50
556934	12	557463	30	557844	94	558233	52
556935	12	557464	30	557845	94	558234	50
557152	119	557465	30	557846	94	558235	50
557153	119	557466	30	557856	42	558236	52
557154	119	557467	30	557857	42	558237	50
557157	133, 134	557468	30	557858	42	558238	50
557158	133, 134	557469	30	557859	42	558239	51
557228	11	557470	30	557860	42	558240	52
557229	11	557471	30	557861	42	558363	16
557252	90	557472	30	557862	42	558491	35
557253	90	557473	30	557863	42	558492	35
557254	90	557474	30	557864	42	558493	35
557359	119	557475	30	557865	42	558494	35
557360	119	557691	94	557979	10	558495	35
557361	119	557692	94	557980	10	558496	35
557394	30	557820	42	557981	10	558497	35
557395	30	557821	42	557982	10	558498	35

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
558499	35	558533	35	558667	26	558701	26
558500	35	558534	35	558668	26	558702	26
558501	35	558535	35	558669	26	558703	26
558502	35	558607	66	558670	26	558704	26
558503	35	558628	36	558671	26	558705	26
558504	35	558629	36	558672	26	558706	26
558505	35	558630	36	558673	26	558707	26
558506	35	558631	36	558674	26	558708	26
558507	35	558632	36	558675	26	558709	26
558508	35	558633	36	558676	26	558710	26
558509	35	558634	36	558677	26	558711	26
558510	35	558635	36	558678	26	558712	26
558511	35	558636	36	558679	26	558713	26
558512	35	558637	36	558680	26	558714	26
558513	35	558638	36	558681	26	558905	47
558514	35	558639	36	558682	26	558922	50
558515	35	558640	36	558683	26	558923	50
558516	35	558641	36	558684	26	558924	50
558517	35	558642	36	558685	26	558925	50
558518	35	558644	36	558686	26	558926	50
558519	35	558645	36	558687	26	558927	50
558520	35	558646	36	558688	26	558928	51
558521	35	558647	36	558689	26	558929	51
558522	35	558648	36	558690	26	558930	51
558523	35	558649	36	558691	26	558931	51
558524	35	558650	36	558692	26	558932	50
558525	35	558651	36	558693	26	558933	50
558526	35	558652	36	558694	26	558934	50
558527	35	558653	36	558695	26	558935	50
558528	35	558654	36	558696	26	558936	50
558529	35	558655	36	558697	26	558937	50
558530	35	558656	36	558698	26	558938	51
558531	35	558657	36	558699	26	558940	51
558532	35	558658	36	558700	26	558941	51

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
558942	51	559395	121	559444	123	559552	94
558943	50	559396	121	559445	123	559553	94
558944	50	559397	121	559446	123	559554	94
558945	50	559398	121	559447	123	559555	94
558946	50	559399	121	559509	46	559559	95
558947	50	559400	121	559522	88	559560	95
558948	50	559401	121	559523	88	559563	95
558949	51	559402	121	559524	88	559564	95
558950	51	559403	121	559525	88	559565	96
558951	51	559404	121	559526	88	559566	96
558952	52	559405	121	559527	88	559567	96
558953	52	559406	122	559528	88	559568	96
558954	52	559407	122	559529	89	559569	96
558955	52	559408	122	559530	89	559570	96
559030	88	559412	121	559531	89	559575	97
559042	66	559413	121	559532	89	559576	97
559164	53	559414	121	559533	89	559577	97
559165	53	559418	121	559534	89	559578	97
559379	122	559419	121	559535	89	559579	97
559380	122	559420	121	559536	89	559580	97
559381	122	559430	124	559537	93	559581	97
559382	122	559431	124	559538	93	559582	97
559383	122	559432	124	559539	93	559583	98
559384	122	559433	124	559540	93	559584	98
559385	122	559434	124	559541	93	559585	98
559386	122	559435	124	559542	93	559586	98
559387	122	559436	123	559543	93	559621	133, 134
559388	121	559437	123	559544	93	559622	133, 134
559389	121	559438	123	559545	93	559623	133, 134
559390	121	559439	123	559546	93	559624	133, 134
559391	121	559440	123	559547	93	559645	125
559392	121	559441	123	559548	93	559648	47
559393	121	559442	123	559550	94	559649	47
559394	121	559443	123	559551	94	559650	47

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
559690	98	559968	96	560145	15	560181	20
559691	98	559969	96	560146	15	560182	20
559693	98	559970	96	560147	23	560183	20
559694	98	559972	16	560148	23	560184	20
559695	98	560115	15	560149	23	560185	20
559696	98	560116	15	560150	23	560186	20
559771	84	560117	15	560152	23	560187	20
559772	84	560118	15	560153	23	560188	20
559773	84	560119	15	560154	23	560189	21
559774	84	560120	15	560155	23	560190	21
559775	84	560121	15	560156	23	560191	21
559776	84	560122	15	560157	23	560192	21
559777	84	560123	15	560158	23	560193	21
559778	84	560124	15	560159	23	560194	21
559779	84	560125	15	560160	23	560195	21
559780	84	560126	15	560161	23	560196	21
559781	84	560127	15	560162	23	560197	21
559782	84	560128	15	560163	23	560198	21
559783	84	560129	15	560164	20	560199	21
559784	84	560130	15	560165	20	560200	21
559785	84	560131	15	560166	20	560201	21
559786	85	560132	15	560167	20	560202	21
559883	85	560133	15	560168	20	560203	21
559892	10	560134	15	560169	20	560204	21
559893	10	560135	15	560170	20	560205	21
559932	46	560136	15	560171	20	560206	21
559933	46	560137	15	560172	20	560207	21
559934	46	560138	15	560173	20	560208	21
559935	46	560139	15	560174	20	560209	21
559962	125	560140	15	560175	20	560210	21
559963	125	560141	15	560176	20	560211	21
559965	98	560142	15	560177	20	560212	21
559966	98	560143	15	560179	20	560347	53
559967	98	560144	15	560180	20	560366	18

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
560371	18	560425	65	560459	56	560985	84
560372	18	560426	65	560460	56	560986	84
560373	18	560427	65	560461	56	560987	84
560374	18	560428	65	560462	56	560988	84
560375	18	560429	65	560463	56	560989	84
560376	18	560430	65	560464	56	560990	84
560377	18	560431	65	560465	55	560991	84
560378	18	560432	65	560466	57	560992	84
560392	55	560433	65	560467	57	560993	84
560394	55	560434	65	560468	57	560994	84
560395	55	560435	65	560570	16	561002	53
560396	55	560436	65	560571	16	561003	53
560397	55	560437	65	560572	16	561056	18
560398	56	560438	65	560573	16	561057	18
560399	56	560439	65	560680	18	561061	18
560401	56	560440	65	560716	18	561062	18
560403	56	560441	65	560771	109	561063	18
560405	56	560442	65	560772	109	561098	48
560406	56	560443	65	560835	109	561099	48
560407	56	560444	65	560836	109	561100	48
560408	56	560445	65	560840	109	561101	48
560409	56	560446	65	560841	109	561161	119
560410	56	560447	65	560866	111	561199	23
560411	56	560448	65	560867	111	561200	23
560412	56	560449	55	560868	111	561201	23
560413	56	560450	55	560873	111	561202	23
560414	56	560451	55	560874	111	561203	23
560415	56	560452	55	560876	111	561204	23
560416	56	560453	56	560887	111	561205	23
560417	56	560454	56	560888	111	561206	23
560418	55	560455	56	560889	111	561207	23
560419	57	560456	56	560892	111	561208	23
560420	57	560457	56	560893	111	561209	23
560421	57	560458	56	560894	111	561210	23

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
561211	23	561245	23	561279	24	561325	45
561212	23	561246	23	561280	24	561326	45
561213	23	561247	24	561281	24	561327	45
561214	23	561248	24	561282	24	561328	45
561215	23	561249	24	561283	24	561329	45
561216	23	561250	24	561284	24	561330	45
561217	23	561251	24	561285	24	561331	45
561218	23	561252	24	561286	24	561332	45
561219	23	561253	24	561287	24	561333	45
561220	23	561254	24	561288	24	561334	45
561221	23	561255	24	561289	24	561335	45
561222	23	561256	24	561290	24	561336	45
561223	23	561257	24	561291	24	561337	45
561224	23	561258	24	561292	24	561338	45
561225	23	561259	24	561293	24	561339	45
561226	23	561260	24	561294	24	561340	45
561227	23	561261	24	561307	45	561341	45
561228	23	561262	24	561308	45	561342	45
561229	23	561263	24	561309	45	561343	45
561230	23	561264	24	561310	45	561344	45
561231	23	561265	24	561311	45	561345	45
561232	23	561266	24	561312	45	561346	45
561233	23	561267	24	561313	45	561347	45
561234	23	561268	24	561314	45	561348	45
561235	23	561269	24	561315	45	561349	45
561236	23	561270	24	561316	45	561350	45
561237	23	561271	24	561317	45	561351	45
561238	23	561272	24	561318	45	561352	45
561239	23	561273	24	561319	45	561353	45
561240	23	561274	24	561320	45	561354	45
561241	23	561275	24	561321	45	561355	45
561242	23	561276	24	561322	45	561356	45
561243	23	561277	24	561323	45	561357	45
561244	23	561278	24	561324	45	561358	45

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
561359	45	561409	39	561509	39	561683	113
561360	45	561410	39	561512	39	561684	113
561361	45	561413	39	561517	39	561698	202
561362	45	561418	39	561518	39	561699	202
561363	45	561419	39	561521	39	561700	202
561364	45	561422	39	561526	40	561701	111
561365	45	561427	39	561527	40	561702	111
561366	45	561428	39	561530	40	561703	111
561367	45	561431	39	561535	40	561704	111
561368	45	561436	39	561536	40	561705	111
561369	45	561437	39	561539	40	561706	111
561370	45	561440	39	561544	40	561707	111
561371	45	561445	39	561545	40	561708	111
561372	45	561446	39	561548	40	561709	111
561373	45	561449	39	561553	40	561710	111
561374	45	561454	39	561554	40	561711	111
561375	45	561455	39	561557	40	561712	111
561376	45	561458	39	561562	40	561713	112
561377	45	561463	39	561563	40	561714	112
561378	45	561464	39	561566	40	561715	112
561379	45	561467	39	561571	40	561716	112
561380	45	561472	39	561572	40	561717	112
561381	45	561473	39	561575	40	561718	112
561382	45	561476	39	561580	132	561719	112
561383	45	561481	39	561582	132	561720	112
561384	45	561482	39	561588	132	561721	112
561385	45	561485	39	561590	132	561722	112
561386	45	561490	39	561664	108	561723	112
561391	39	561491	39	561665	108	561724	112
561392	39	561494	39	561666	108	561726	137
561395	39	561499	39	561679	113	561728	137
561400	39	561500	39	561680	113	561729	137
561401	39	561503	39	561681	113	561731	137
561404	39	561508	39	561682	113	561732	137

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
561733	137	561775	128	561812	111	561847	85, 119
561734	137	561776	128	561813	111	561848	135
561739	117	561777	128	561814	111	561849	135
561740	117	561778	130	561815	111	561850	135
561741	117	561779	130	561816	111	561851	135
561742	117	561780	130	561817	111	561853	135
561743	117	561781	130	561818	111	561854	135
561744	117	561782	130	561819	111	561855	135
561745	115	561783	130	561820	111	561856	123
561746	115	561785	130	561821	111	561857	123
561747	115	561786	130	561822	111	561858	123
561748	115	561787	130	561823	111	561859	71
561749	115	561788	130	561824	111	561860	73
561750	115	561789	130	561826	113	561861	135
561751	118	561790	130	561827	113	561862	135
561752	118	561791	130	561828	113	561863	135
561753	118	561792	130	561829	113	561864	135
561754	118	561794	130	561830	113	561865	125
561755	118	561795	130	561831	136	561866	125
561756	118	561796	130	561832	113	561867	125
561757	116	561797	130	561833	136	561870	133, 134
561758	116	561798	130	561834	136	561871	133, 134
561759	116	561799	131	561835	136	561882	91
561760	116	561800	131	561836	135	561883	91
561761	116	561801	131	561837	115	561901	69
561762	116	561802	131	561838	115	561902	71
561763	123	561803	131	561839	115	561903	73
561764	123	561804	131	561840	115	561904	60
561765	123	561805	131	561841	115	561905	62
561770	128	561807	131	561842	135	561906	69
561771	128	561808	136	561843	115	561909	60
561772	128	561809	130	561844	135	561910	62
561773	128	561810	111	561845	135	561911	69
561774	128	561811	111	561846	135	561912	71

Reference Numbers

Ref. No.	Page	Ref. No.	Page	Ref. No.	Page	Ref. No.	Page
561913	73	561998	71	562036	63	562100	63
561914	60	561999	73	562037	70	562101	70
561915	62	562000	60	562038	72	562102	70
561955	69	562001	62	562039	70	562103	70
561967	69	562006	73	562040	74	562104	70
561968	71	562007	60	562041	61	562105	72
561969	69	562008	62	562042	63	562106	72
561970	71	562009	69	562043	63	562107	74
561971	73	562010	71	562044	70	562108	61
561972	60	562011	69	562045	72	562109	63
561973	62	562012	71	562046	70	562110	63
561974	69	562013	73	562047	74	562163	91
561975	71	562014	60	562048	61	562164	91
561976	69	562015	62	562049	63	562165	91
561977	71	562016	69	562050	63	562166	91
561978	73	562017	71	562081	70	562282	105
561979	60	562018	69	562082	70	562287	40
561980	62	562019	71	562083	70	562288	40
561981	69	562020	73	562084	70	562291	40
561982	71	562021	60	562085	72	562296	40
561983	69	562022	62	562086	72	562297	40
561984	71	562023	69	562087	74	562300	40
561985	73	562024	71	562088	61	562305	40
561986	60	562025	69	562089	63	562306	40
561987	62	562026	71	562090	63	562309	40
561988	69	562027	73	562091	70	562314	40
561989	71	562028	60	562092	70	562315	40
561990	69	562029	62	562093	70	562318	40
561991	71	562030	70	562094	70	566047	12
561992	73	562031	72	562095	72	566134	108
561993	60	562032	70	562096	72	566135	108
561994	62	562033	74	562097	74	566136	108
561996	71	562034	61	562098	61	566137	109
561997	69	562035	63	562099	63	566138	109

Reference Numbers

Ref. No.	Page
566139	109
566140	109
566141	109
566142	109
566143	136
566144	136
566145	136
566146	136
566147	136
566148	136
566149	136
566150	136
566151	136
566152	136
566153	136
566155	136
566156	136
566157	136
566158	136
566159	136
566160	136
566161	136
566162	136
566163	136
566164	136
566165	136
566166	136
566167	136
566168	136
566169	136

Subsidiaries

Subsidiaries	Address	Phone / Fax / Email
Vossloh-Schwabe Deutschland GmbH Germany, Benelux, CIS, Georgia, Great Britain, Ireland, Austria, Switzerland, Scandinavia, Turkey, Ukraine	P.O. Box 28 69 D-58478 Lüdenscheid, Germany	Phone: +49/(0)2351/10 10 Fax: +49/(0)2351/10 12 17 info.vsv@vsv.vossloh-schwabe.com
Australia Vossloh-Schwabe Deutschland GmbH	Branch Office Sydney 3A Lenton Place North Rocks, N.S.W. 2151, Australia	Phone: +61/(0)2/88 43 07 00 Fax: +61/(0)2/88 43 07 77 sales-aus@vsaus.vossloh-schwabe.com
China Vossloh-Schwabe Electrical Appliances Trading (Shanghai) Co., Ltd.	Wiselogic International Center Room 2603, #66 North Shannxi Road Shanghai, P.C. 200041/China	Phone: +86/21/62 18 55 99 Fax: +86/21/62 67 07 81 linda.li@vshk.vossloh-schwabe.com
Czech Republic, Slovakia Vossloh-Schwabe Deutschland GmbH	Sales Office East Europe Na Radositi 184 155 21 Prague 5 - Zlicin, Czech Republic	Phone: +420/235 30 03 58 Fax: +420/235 31 22 61 magdalena.ragauerova@vsv.vossloh-schwabe.com
France Vossloh-Schwabe Deutschland GmbH	Branch Office France 10 Rue Denis Papin CS50101 68025 Colmar, France	Phone: +33/(0)389/20 12 12 Fax: +33/(0)389/24 18 65 vsf.ventes@vsf.vossloh-schwabe.com
Hong Kong Vossloh-Schwabe Hong Kong Ltd.	Flat A & B, 26/F., West Gate Tower 7 Wing Hong Street, Cheung Sha Wan Kowloon, Hong Kong	Phone: +852/28779688 Fax: +852/28779933 linda.li@vshk.vossloh-schwabe.com
Italy Vossloh-Schwabe Italia S.p.A.	Via Strada S. Martino 15 47027 Sarsina/Farli-Cesena, Italy	Phone: +39/0547/9 81 11 Fax: +39/0547/9 82 60 vsi@vsi.vossloh-schwabe.com
Korea Vossloh-Schwabe Korea	#605 Cosmo Tower Building 416 Youngdongdae-ro, Gangnam-gu Seoul 135-549, Korea	Phone: +82/2/34 84 66 11/16 Fax: +82/2/34 84 66 17 j.y.maeng@vs.vossloh-schwabe.com
New Zealand Vossloh-Schwabe Deutschland GmbH	Branch Office Auckland P.O. Box 58809 2163 Botany, Manukau / New Zealand	Phone: +64/(0)9/265 11 10 Fax: +64/(0)9/265 11 20 sales-nz@vsnz.vossloh-schwabe.com
Poland, Baltic States Vossloh-Schwabe Deutschland GmbH	Sales Office Poland ul. Zaporoska 6/5 PL 30-389 Kraków, Poland	Phone: +48/(0)12/3 57 23 23 Fax: +48/(0)12/2 62 03 26 lukasz.niemczycki@vsv.vossloh-schwabe.com
Serbia, Albania, Bosnia-Herzegovina, Bulgaria, Croatia, Greece, Kosovo, Macedonia, Montenegro, Slovenia, Cyprus Vossloh-Schwabe Deutschland GmbH	Sales Office Belgrad/Serbia Danila Lekica 1 11000 Belgrade, Serbia	Phone: +381/63/286 330 Fax: +381/63/286 330 goran.stankovic@vsv.vossloh-schwabe.com
Singapore Vossloh-Schwabe Pte. Ltd.	Vertex, 33 Ubi Avenue 3 Lobby A #06-72 Singapore 408868	Phone: +65/62 75 75 33 Fax: +65/62 75 76 33 sales.vsf@vsfe.vossloh-schwabe.com
South Africa Vossloh-Schwabe Deutschland GmbH	Branch Office Johannesburg 154, Lechwe Avenue, Corporate Park Midrand 1685, South Africa	Phone: +27/11/31 44 340 Fax: +27/11/31 45 287 barry.hall@vsaf.vossloh-schwabe.com
Spain, South America, Portugal Vossloh-Schwabe Ibérica, S.L.	Venezuela 105, 5º - A 08019 Barcelona, Spain	Phone: +34/93/481 70 70 Fax: +34/93/481 70 71 vse@vse.vossloh-schwabe.com
Taiwan Vossloh-Schwabe Pte. Ltd.	Taiwan Branch 9, Fl-2, No. 80 Sung Chiang Road, Taipei, Taiwan	Phone: +886/(0)2/25 68 36 22 Fax: +886/(0)2/25 68 36 20 betty.ho@vstw.vossloh-schwabe.com
Thailand Vossloh-Schwabe Trading Ltd.	3rd Floor (Unit 1) BUI Building 1 175-177 Soi Anumarnratchathon 1 Surawong Road, Kwaeng Suriyawongse Khet Bangrak, Bangkok 10500, Thailand	Phone: +66/(0)2/63 473 11 Fax: +66/(0)2/63 473 13 sales.vstt@vstt.vossloh-schwabe.com
Tunisia Vossloh-Schwabe Tunisie S.A.	Rue de l'énergie, BP. 299 Zone Industrielle de Ben Arous 2013 Tunis, Tunisia	Phone: +216/71/384 900 Fax: +216/71/384 990 hatem.benyahmed@vstu.com.tn
USA, Canada, Mexico Universal™ Lighting Technologies	26 Century Blvd. Nashville, TN 37214-3683, USA	Phone: +1/615/316-5100 Fax: +1/615/316-5205 oem_sales@unvlt.com

Whenever an electric light goes on around the world, Vossloh-Schwabe is likely to have made a key contribution to ensuring that everything works at the flick of a switch.

Headquartered in Germany, Vossloh-Schwabe has been a member of the global Panasonic group since 2002 and counts as a technology leader within the lighting sector. Top-quality, high-performance products form the basis of the company's success.

Vossloh-Schwabe's extensive product portfolio covers all lighting components: LED systems with matching control gear units and state-of-the-art control systems (LiCS) as well as electronic and magnetic ballasts and lampholders.

A member of the Panasonic group **Panasonic**

Vossloh-Schwabe Deutschland GmbH

Hohe Steinert 8 · 58509 Lüdenscheid · Germany
Telefon +49/23 51/10 10 · Fax +49/23 51/10 12 17

www.vossloh-schwabe.com

VS LIGHTING SOLUTIONS

All rights reserved © Vossloh-Schwabe
Photos: istockphoto.com; shutterstock.com
Specifications are subject to change without notice
Innovative Systems EN 03/2016